User Guide

MediaLink

MLC 52 Series

MediaLink® Controllers

Extron® Electronics
INTERFACING, SWITCHING AND CONTROL

68-1079-01 Rev. A
10 10

Safety Instructions • English

This symbol is intended to alert the user of important operating and maintenance (servicing) instructions in the literature provided with the equipment.

This symbol is intended to alert the user of the presence of uninsulated dangerous voltage within the product's enclosure that may present a risk of electric shock.

Caution

Read Instructions • Read and understand all safety and operating instructions before using the equipment.

Retain Instructions • The safety instructions should be kept for future reference.

Follow Warnings • Follow all warnings and instructions marked on the equipment or in the user information.

Avoid Attachments • Do not use tools or attachments that are not recommended by the equipment manufacturer because they may be hazardous.

Warning

Power sources • This equipment should be operated only from the power source indicated on the product. This equipment is intended to be used with a main power system with a grounded (neutral) conductor. The third (grounding) pin is a safety feature, do not attempt to bypass or disable it.

Power disconnection • To remove power from the equipment safely, remove all power cords from the rear of the equipment, or the desktop power module (if detachable), or from the power source receptacle (wall plug).

Power cord protection • Power cords should be routed so that they are not likely to be stepped on or pinched by items placed upon or against them.

Servicing • Refer all servicing to qualified service personnel. There are no user-serviceable parts inside. To prevent the risk of shock, do not attempt to service this equipment yourself because opening or removing covers may expose you to dangerous voltage or other hazards.

Slots and openings • If the equipment has slots or holes in the enclosure, these are provided to prevent overheating of sensitive components inside. These openings must never be blocked by other objects.

Lithium battery • There is a danger of explosion if battery is incorrectly replaced. Replace it only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.

Consignes de Sécurité • Français

Ce symbole sert à avertir l'utilisateur que la documentation fournie avec le matériel contient des instructions importantes concernant l'exploitation et la maintenance (réparation).

Ce symbole sert à avertir l'utilisateur de la présence dans le boîtier de l'appareil de tensions dangereuses non isolées posant des risques d'électrocution.

Attention

Lire les instructions• Prendre connaissance de toutes les consignes de sécurité et d'exploitation avant d'utiliser le matériel.

Conserver les instructions• Ranger les consignes de sécurité afin de pouvoir les consulter à l'avenir.

Respecter les avertissements • Observer tous les avertissements et consignes marqués sur le matériel ou présentés dans la documentation utilisateur.

Eviter les pièces de fixation • Ne pas utiliser de pièces de fixation ni d'outils non recommandés par le fabricant du matériel car cela risquerait de poser certains dangers.

Avertissement

Alimentations • Ne faire fonctionner ce matériel qu'avec la source d'alimentation indiquée sur l'appareil. Ce matériel doit être utilisé avec une alimentation principale comportant un fil de terre (neutre). Le troisième contact (de mise à la terre) constitue un dispositif de sécurité : n'essayez pas de la contourner ni de la désactiver.

Déconnexion de l'alimentation• Pour mettre le matériel hors tension sans danger, déconnectez tous les cordons d'alimentation de l'arrière de l'appareil ou du module d'alimentation de bureau (s'il est amovible) ou encore de la prise secteur.

Protection du cordon d'alimentation • Acheminer les cordons d'alimentation de manière à ce que personne ne risque de marcher dessus et à ce qu'ils ne soient pas écrasés ou pincés par des objets.

Réparation-maintenance • Faire exécuter toutes les interventions de réparation-maintenance par un technicien qualifié. Aucun des éléments internes ne peut être réparé par l'utilisateur. Afin d'éviter tout danger d'électrocution, l'utilisateur ne doit pas essayer de procéder lui-même à ces opérations car l'ouverture ou le retrait des couvercles risquent de l'exposer à de hautes tensions et autres dangers.

Fentes et orifices • Si le boîtier de l'appareil comporte des fentes ou des orifices, ceux-ci servent à empêcher les composants internes sensibles de surchauffer. Ces ouvertures ne doivent jamais être bloquées par des objets.

Lithium Batterie • Il a danger d'explosion s'Il y a remplacment incorrect de la batterie. Remplacer uniquement avec une batterie du meme type ou d'un ype equivalent recommande par le constructeur. Mettre au reut les batteries usagees conformement aux instructions du fabricant.

Sicherheitsanleitungen • Deutsch

Dieses Symbol soll dem Benutzer in der im Lieferumfang enthaltenen Dokumentation besonders wichtige Hinweise zur Bedienung und Wartung (Instandhaltung) geben.

Dieses Symbol soll den Benutzer darauf aufmerksam machen, daß im Inneren des Gehäuses dieses Produktes gefährliche Spannungen, die nicht isoliert sind und die einen elektrischen Schock verursachen können, herrschen.

Achtung

Lesen der Anleitungen • Bevor Sie das Gerät zum ersten Mal verwenden, sollten Sie alle Sicherheits-und Bedienungsanleitungen genau durchlesen und verstehen.

Aufbewahren der Anleitungen • Die Hinweise zur elektrischen Sicherheit des Produktes sollten Sie aufbewahren, damit Sie im Bedarfsfall darauf zurückgreifen können.

Befolgen der Warnhinweise • Befolgen Sie alle Warnhinweise und Anleitungen auf dem Gerät oder in der Benutzerdokumentation.

Keine Zusatzgeräte • Verwenden Sie keine Werkzeuge oder Zusatzgeräte, die nicht ausdrücklich vom Hersteller empfohlen wurden, da diese eine Gefahrenquelle darstellen können.

Vorsicht

Stromquellen • Dieses Gerät sollte nur über die auf dem Produkt angegebene Stromquelle betrieben werden. Dieses Gerät wurde für eine Verwendung mit einer Hauptstromleitung mit einem geerdeten (neutralen) Leiter konzipiert. Der dritte Kontakt ist für einen Erdanschluß, und stellt eine Sicherheitsfunktion dar. Diese sollte nicht umgangen oder außer Betrieb gesetzt werden.

Stromunterbrechung • Um das Gerät auf sichere Weise vom Netz zu trennen, sollten Sie alle Netzkabel aus der Rückseite des Gerätes, aus der externen Stomversorgung (falls dies möglich ist) oder aus der Wandsteckdose ziehen.

Schutz des Netzkabels • Netzkabel sollten stets so verlegt werden, daß sie nicht im Weg liegen und niemand darauf treten kann oder Objekte darauf- oder unmittelbar dagegengestellt werden können.

Wartung • Alle Wartungsmaßnahmen sollten nur von qualifiziertem Servicepersonal durchgeführt werden. Die internen Komponenten des Gerätes sind wartungsfrei. Zur Vermeidung eines elektrischen Schocks versuchen Sie in keinem Fall, dieses Gerät selbst öffnen, da beim Entfernen der Abdeckungen die Gefahr eines elektrischen Schlags und/oder andere Gefahren bestehen.

Schlitze und Öffnungen • Wenn das Gerät Schlitze oder Löcher im Gehäuse aufweist, dienen diese zur Vermeidung einer Überhitzung der empfindlichen Teile im Inneren. Diese Öffnungen dürfen niemals von anderen Objekten blockiert werden.

Litium-Batterie • Explosionsgefahr, falls die Batterie nicht richtig ersetzt wird. Ersetzen Sie verbrauchte Batterien nur durch den gleichen oder einen vergleichbaren Batterietyp, der auch vom Hersteller empfohlen wird. Entsorgen Sie verbrauchte Batterien bitte gemäß den Herstelleranweisungen.

Instrucciones de seguridad • Español

Este símbolo se utiliza para advertir al usuario sobre instrucciones importantes de operación y mantenimiento (o cambio de partes) que se desean destacar en el contenido de la documentación suministrada con los equipos.

Este símbolo se utiliza para advertir al usuario sobre la presencia de elementos con voltaje peligroso sin protección aislante, que puedan encontrarse dentro de la caja o alojamiento del producto, y que puedan representar riesgo de electrocución.

Precaucion

Leer las instrucciones • Leer y analizar todas las instrucciones de operación y seguridad, antes de usar el equipo.

Conservar las instrucciones • Conservar las instrucciones de seguridad para futura consulta.

Obedecer las advertencias • Todas las advertencias e instrucciones marcadas en el equipo o en la documentación del usuario, deben ser obedecidas.

Evitar el uso de accesorios • No usar herramientas o accesorios que no sean especificamente recomendados por el fabricante, ya que podrian implicar riesgos.

Advertencia

Alimentación eléctrica • Este equipo debe conectarse únicamente a la fuente/tipo de alimentación eléctrica indicada en el mismo. La alimentación eléctrica de este equipo debe provenir de un sistema de distribución general con conductor neutro a tierra. La tercera pata (puesta a tierra) es una medida de seguridad, no puentearia ni eliminaria.

Desconexión de alimentación eléctrica • Para desconectar con seguridad la acometida de alimentación eléctrica al equipo, desenchufar todos los cables de alimentación en el panel trasero del equipo, o desenchufar el módulo de alimentación (si fuera independiente), o desenchufar el cable del receptáculo de la pared.

Protección del cables de alimentación • Los cables de alimentación eléctrica se deben instalar en lugares donde no sean pisados ni apretados por objetos que se puedan apoyar sobre ellos.

Reparaciones/mantenimiento • Solicitar siempre los servicios técnicos de personal calificado. En el interior no hay partes a las que el usuario deba acceder. Para evitar riesgo de electrocución, no intentar personalmente la reparación/mantenimiento de este equipo, ya que al abrir o extraer las tapas puede quedar expuesto a voltajes peligrosos u otros riesgos.

Ranuras y aberturas • Si el equipo posee ranuras o orificios en su caja/alojamiento, es para evitar el sobrecalientamiento de componentes internos sensibles. Estas aberturas nunca se deben obstruir con otros objetos.

Batería de litio • Existe riesgo de explosión si esta batería se coloca en la posición incorrecta. Cambiar esta batería únicamente con el mismo tipo (o su equivalente) recomendado por el fabricante. Desachar las baterías usadas siguiendo las instrucciones del fabricante.

安全须知 • 中文

这个符号提示用户该设备用户手册中有重要的操作和维护说明。

这个符号警告用户该设备机壳内有暴露的危险电压，有触电危险。

注意

阅读说明书 • 用户使用该设备前必须阅读并理解所有安全和使用说明。

保存说明书 • 用户应保存安全说明书以备将来使用。

遵守警告 • 用户应遵守产品和用户指南上的所有安全和操作说明。

避免追加 • 不要使用该产品厂商没有推荐的工具或追加设备，以避免危险。

警告

电源 • 该设备只能使用产品上标明的电源。 设备必须使用有地线的供电系统供电。 第三条线（地线）是安全设施，不能不用或跳过 。

拔掉电源 • 为安全地从设备拔掉电源，请拔掉所有设备后或桌面电源的电源线，或任何接到市电系统的电源线。

电源线保护 • 妥善布线， 避免被踩踏，或重物挤压。

维护 • 所有维修必须由认证的维修人员进行。 设备内部没有用户可以更换的零件。为避免出现触电危险不要自己试图打开设备盖子维修该设备。

通风孔 • 有些设备机壳上有通风槽或孔，它们是用来防止机内敏感元件过热。 不要用任何东西挡住通风孔。

锂电池 • 不正确的更换电池会有爆炸的危险。必须使用与厂家推荐的相同或相近型号的电池。按照生产厂的建议处理废弃电池。

FCC Class A Notice

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

The Class A limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

NOTE: This unit was tested with shielded cables on the peripheral devices. Shielded cables must be used with the unit to ensure compliance with FCC emissions limits.

For more information on safety guidelines, regulatory compliances, EMI/EMF compliance, accessibility, and related topics, **click here**.

Notational Conventions Used in this Guide

TIP: A tip provides a suggestion to make setting up or working with the device easier.

NOTE: A note draws attention to important information.

CAUTION: A caution warns of things or actions that might damage the equipment.

WARNING: A warning warns of things or actions that might cause injury, death, or other severe consequences.

Copyright

© 2010 Extron Electronics. All rights reserved.

Trademarks

All trademarks mentioned in this guide are the properties of their respective owners.

Contents

Introduction 1

About This Guide 1
About the MLC 52 Series MediaLink Controllers . 1
Models 1
Standard Features 2
Options and Accessories 3
MLC 52 Configuration Software 3
Device Drivers 4
Application Diagrams 4
System Requirements 5

Installation and Configuration 6

Rear Panel and Cable Connections 6
Installation Steps 8
Replacing the Faceplate (US Models Only) 9
Replacing Button Labels 10
Wiring the Control Connector 12
Wiring for RS-232 Control (RS Models Only) . 12
Wiring for IR Control 13
Wiring the Power Connector 16
Configuring the MLC 52 Using IR 16
Configuring Using IR Data Transfer (IR Beaming) 17
Configuring Using IR Learning 19
Removing IR Commands from a Button 20
Setting Up Button Macros Using IR 20
Configuring a Single Button for Input Source Selection Using IR 21
Setting Up an MLC 52 VC Model with an Extron Amplifier 22
Wiring the VC Port 22
Requirements for the MLC 52 VC 23
Configuring the MLC 52 IR VC and MLC 52 RS VC Vol Buttons 24
Mounting the MLC 52 24
Preparing the Site 24
Mounting the MLC to an Electrical Box 25
Mounting the MLC to a Wall or Furniture 27

Operation 28

Front Panel Features 28
Buttons on the Front Panel 28
Front Panel Components 29
Powering the Display Device On and Off 31
Powering On 31
Powering Off 32
Operating the MLC 52 Using IR Remote Control 33
Buttons on the IR 452 Remote Control 34
Resetting 34
Locking the Front Panel (Executive Mode) 35

Special Applications 36

Application 1: Using Multiple Sources with an MLC 52 36
Programming Buttons for an IR Controlled System 37
Application 2: Controlling Projectors that Require Power Off Confirmation 41
Application 3: Controlling Projectors that have Multi-coded IR Functionality 42
Configuring the MLC 52 for Multi-coded IR Functionality 42

Serial Communication 49

Configuration Ports 49
Using the MLC 52 Configuration Program 49
Installing the Software from the DVD 50
Downloading and Installing the Software from the Web 51
Starting the Configuration Program 52
Loading Extron Drivers 54
Using SIS Commands 60
Host-to-Controller Communications 60
Using the Command/Response Table 60
Symbol Definitions 61
Command/response Table for SIS Commands 62

Reference Information 63

Specifications — MLC 52 Series 63
Part Numbers and Accessories 68
Included Parts 68
Optional Accessories 68
Recommended Cables 69
Mounting an Electrical Box 70
Templates for MLC 52 and MLC 52 VC (US Models) 72
MLC 52 IR and MLC 52 RS Template (One-gang Size) 72
MLC 52 IR VC and MLC 52 RS VC Template (Two-gang Size) 73

Introduction

This section gives an overview of the *MLC 52 User Guide* and describes the Extron® MLC 52 Series MediaLink® Controllers and their features. Topics that are covered include:

- **About This Guide**
- **About the MLC 52 Series MediaLink Controllers**
- **Application Diagrams**
- **System Requirements**

About This Guide

This guide contains detailed information and best practice recommendations about cabling, programming, and configuring the MLC 52 Series MediaLink Controllers and provides specifications and dimensions.

Throughout this guide the MLC 52 controllers are interchangeably referred to as "MLC 52," "MLC," or "controller."

About the MLC 52 Series MediaLink Controllers

The MLC 52 Series enable RS-232 or infrared (IR) remote control of a projector or other display device. They are economical, compact (one-gang or two-gang size), easy-to-use controllers for use with audio/video equipment in sites such as elementary or high school classrooms or small conference rooms. The MLC 52 acts as a universal remote control panel, providing control of the power, input selection, volume, and other functions of a display device. Device control is provided via the MLC front panel buttons or via a host computer or control system using RS-232 communication and the Extron Simple Instruction Set™ (SIS™) commands or the Extron MLC 52/DVCM 50 Configuration Program.

The MLC 52 can be configured using three different methods:

- Infrared (IR) learning
- IR data transfer ("beaming") from another MLC 52
- Using Extron device control drivers with the MLC 52 configuration software program

Models

US models

- **MLC 52 IR** — 1-gang size; controls the display device by IR.
- **MLC 52 IR VC** — 2-gang size; controls the display device via IR. This model has a volume control knob to control an amplifier such as the Extron MPA Mini Power Amplifier (purchased separately).
- **MLC 52 RS** — 1-gang size; controls the display device by either IR or RS-232.
- **MLC 52 RS VC** — 2-gang size; controls the display device by either IR or RS-232. This model has a volume control knob to control an amplifier such as an Extron MPA Mini Power Amplifier (purchased separately).

European models

- **MLC 52 RS EU** — European 2-gang size. Controls the display device by either IR or RS-232.
- **MLC 52 RS EU VC** — European 2-gang size. Controls the display device by either IR or RS-232. This model has a volume control knob to control an amplifier such as an Extron MPA Mini Power Amplifier (purchased separately).

MK models

- **MLC 52 RS MK** — UK 1-gang size. Controls the display device by either IR or RS-232.
- **MLC 52 RS MK VC** — UK 2-gang size. Controls the display device by either IR or RS-232. This model has a volume control knob to control an amplifier such as an Extron MPA Mini Power Amplifier (purchased separately).

The cabling, operation, and setup are identical for all MLC 52 models. All have the same button functionality.

Standard Features

- **IR and RS-232 ports for universal display device control** — The MLC 52 has a dedicated port for communicating with virtually any projector or display via infrared signal. The MLC 52 RS models also have ports for unidirectional RS-232 wired serial control. Projector control drivers can be downloaded from the Extron website (**www.extron.com**) or can be created using the MLC 52 configuration program.
- **Discrete On and Off display device power controls** — These controls simplify system operations and eliminate the need for a handheld display or projector remote control.
- **Configurable, backlit buttons** — The front panel buttons can be set up to control display device power, volume, input selection, or any other IR or RS-232 command function supported by the device. The buttons are backlit and can be custom labeled, offering easy operation in low-light environments.
- **Macro and toggle button modes** — Each button on the MLC can be programmed to send out up to four IR or serial commands. You can set each button to issue all its commands with one press (macro mode) or to issue its commands one at a time, in sequence, with each button press (toggle mode).
- **Front panel configuration port** — This RS-232 serial port enables advanced configuration, driver downloads, and firmware updates to be performed from the front panel without the need to remove the controller from its mounting. The optional Extron configuration cable (part number 70-335-01) can be used to connect the MLC 52 to the RS-232 port of the computer.
- **Three configuration methods** — The MLC 52 can be configured easily using the following methods:
  - **IR learning** — Allows the MLC 52 to be set up directly from the remote control of the display device without the need for software.
  - **IR data transfer** — Duplicates complete configuration information from one MLC 52 model to another without cables or software.
  - **Configuration software** — Combined with one of the many IR or RS-232 drivers that are provided with the controller on DVD or available on the Extron web site, the Extron MLC 52 Configuration Program provides fast and simple setup.
- **Inactivity timer for display shutoff** — Adjustable timer control provides automatic shutdown of the display device to conserve energy, prevent plasma burn-in, and extend projector lamp life.

- **Front panel security lockout** — Front panel lockout (executive mode) can be implemented where the MLC 52 is installed in an unsecured environment and universal access is not desirable.
- **Flexible mounting options** — With a standard electrical box or one of the included mounting brackets ("mud rings"), the MLC 52 can be mounted in a variety of locations, including walls and lecterns.
- **Volume control (VC) faceplates** — The two-gang sized VC models each have a volume control knob in addition to the six control buttons. To use this knob, connect the MLC 52 to a power amplifier (purchased separately), such as the Extron MPA Series Mini Power Amplifier that is also connected to the projector or display (see the **application diagrams**, later in this section). The volume control knob adjusts the volume on the amplifier. This option frees the two volume control buttons on the MLC to be used or reconfigured for other display device functions.
- **Section 508 Compliant** — The MLC 52 meets or exceeds accessibility standards for Electronic Information Technology. For more information about the Extron Commitment to Accessibility, see the Extron Accessibility web page at **www.extron.com/company/article.aspx?id=accessibility**.
- **Power supply** — A 12 V, 1 A, external universal ENERGY STAR® qualified power supply, part number 70-775-01, is included and provides worldwide compatibility, low power consumption, and reduced operating costs.

> **NOTE:** The Extron PS 124 and other Extron power supplies can also be used with the MLC 52.

Options and Accessories

- **MPA Series Mini Power Amplifier** — Connect an MPA 152 (part number 60-844-01) to the volume control port of the MLC 52 VC models, and to your projector or display and speakers. This enables you to use the MLC volume knob to control the volume of the speakers via the MPA.
- **Remote control** — The optional IR 452 Remote Control and the optional IR Link and IRL 20 signal repeaters provide infrared remote control of the MLC unit from up to 30 feet (9.1 m) away. The signal repeaters work with any Extron hand-held IR remote control.

MLC 52 Configuration Software

The included MLC 52/DVCM 50 Configuration Program is used to configure the MLC buttons and ports via an RS-232 connection. This software, provided on a DVD that is delivered with the product, enables you to set functions for the front panel buttons and to configure the MLC ports in order to control devices via the MLC. The software works in combination with the IR or RS-232 drivers, also provided with the MLC on DVD or at **www.extron.com**. See "**Installing the Software from the DVD**" in the "Serial Configuration" section to access this program.

Device Drivers

In order for the MLC 52 to control a switcher, projector, or other display device via IR or RS-232 communication, it must have drivers loaded for the devices it will control. Drivers can be obtained in the following ways:

- IR or an RS-232 driver files can be installed from a disc, downloaded from the Extron web site (**www.extron.com**), or downloaded from Extron via the driver subscription feature within the MLC 52 configuration program. The drivers are saved on your computer in a folder located at C:\Program Files\Extron\Driver2. You can then upload the desired drivers to the MLC via the MLC 52 configuration software.
- IR commands can be captured from the IR remote control of a device through IR Learning or IR data transfer to create a driver. When a driver is created, it can be added to the configuration program so that the commands can be used to configure the MLC to control the device (see "**Configuring the MLC 52 Using IR**" in the "Installation and Configuration" section).

Application Diagrams

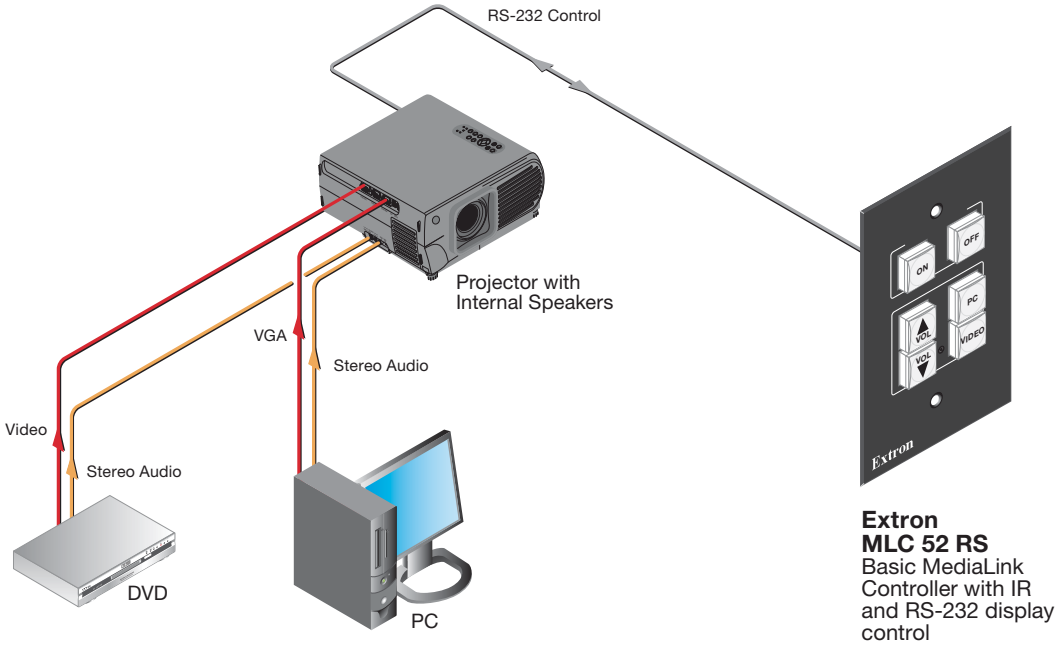

Figure 1. Application Diagram for an MLC 52 RS

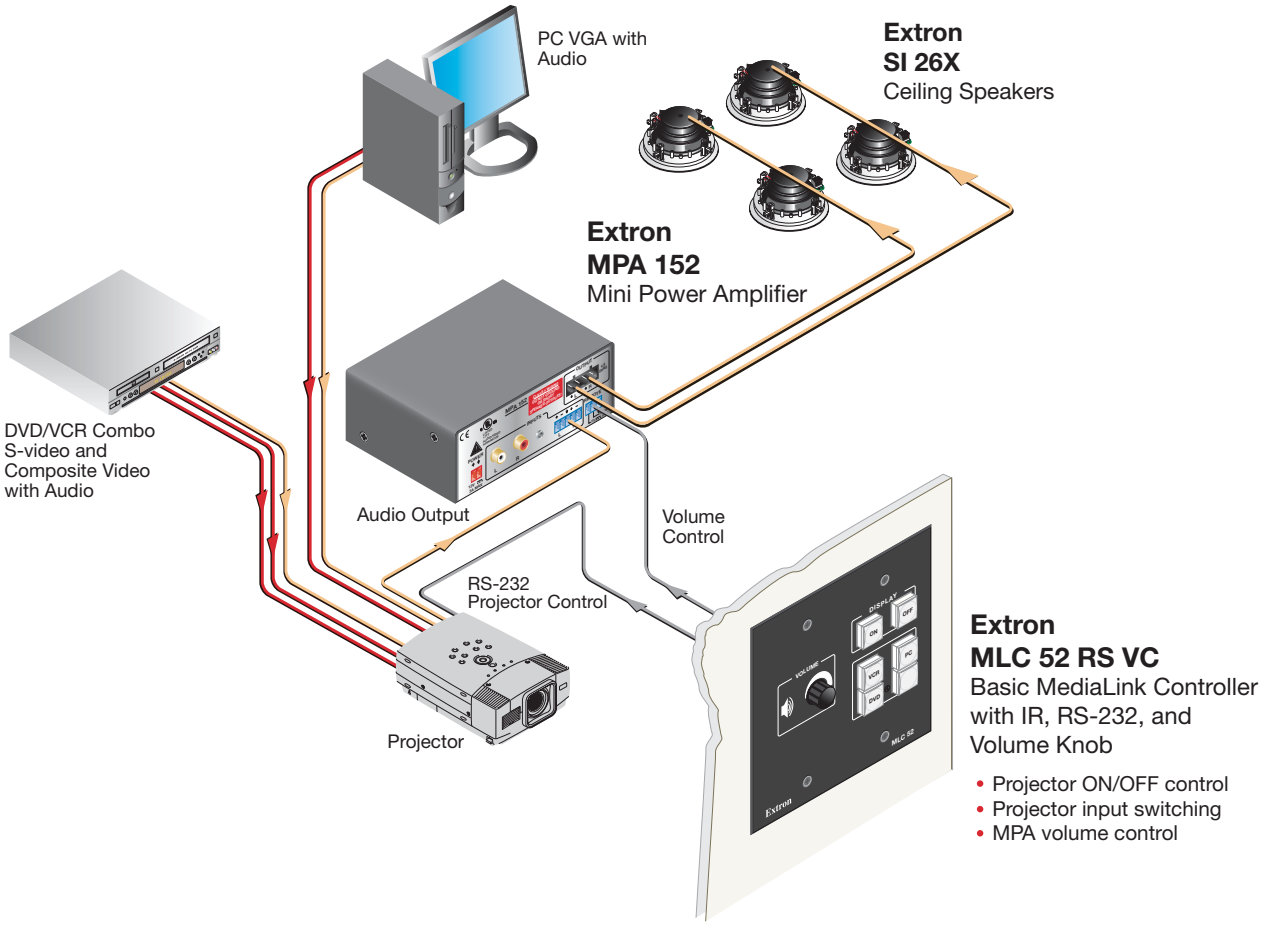

Figure 2. Application Diagram for an MLC 52 RS VC

System Requirements

The minimum PC system requirements for installing the configuration software are:

- Intel® Pentium® III 750 MHz processor
- Microsoft® Windows® XP or higher
- Microsoft.NET Framework 2.0 or higher
- 128 MB of RAM
- 50 MB of available hard disk space

Installation and Configuration

This section describes the front, side, and rear panel features of the four MLC 52 models, and provides procedures for installing and configuring the controllers. Topics that are covered include:

- **Rear Panel and Cable Connections**
- **Installation Steps**
- **Replacing the Faceplate (US Models Only)**
- **Replacing Button Labels**
- **Wiring the Control Connector**
- **Configuring the MLC 52 Using IR**
- **Setting Up an MLC 52 VC Model with an Extron Amplifier**
- **Mounting the MLC 52**

Rear Panel and Cable Connections

The following diagrams show the locations of the connector, switches, LEDs, and IR sensors on the back of the MLC 52 with standard and VC faceplates.

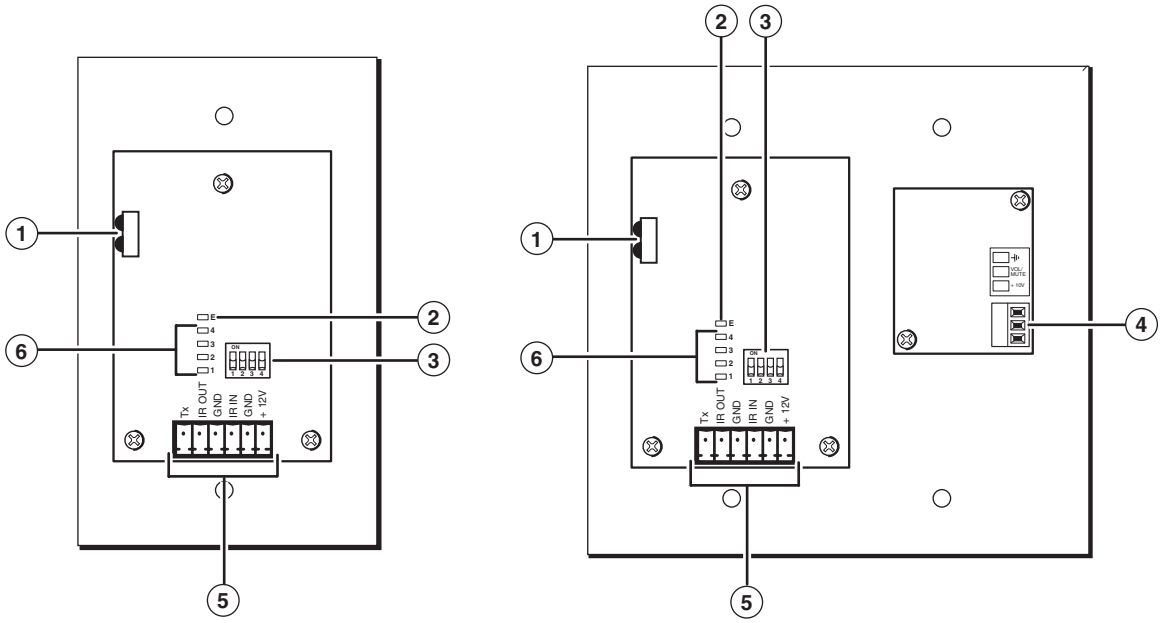

MLC 52 **MLC 52 VC**

Figure 3. MLC 52 and MLC 52 VC Rear Views (US Models)

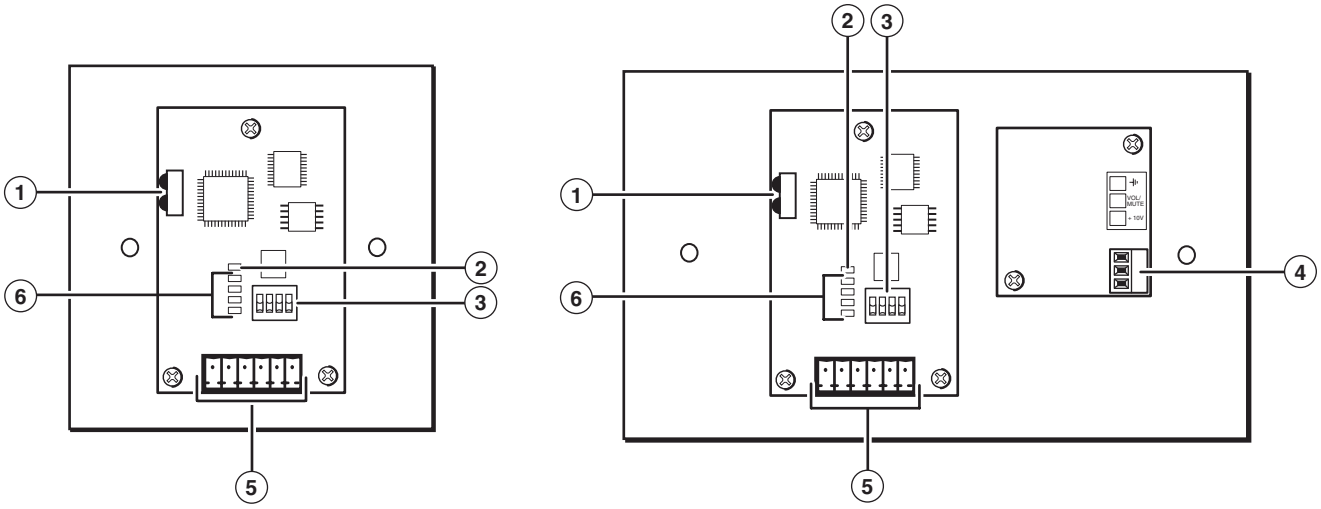

Figure 4. MLC 52 RS MK and MLC 52 RS MK VC Rear Views

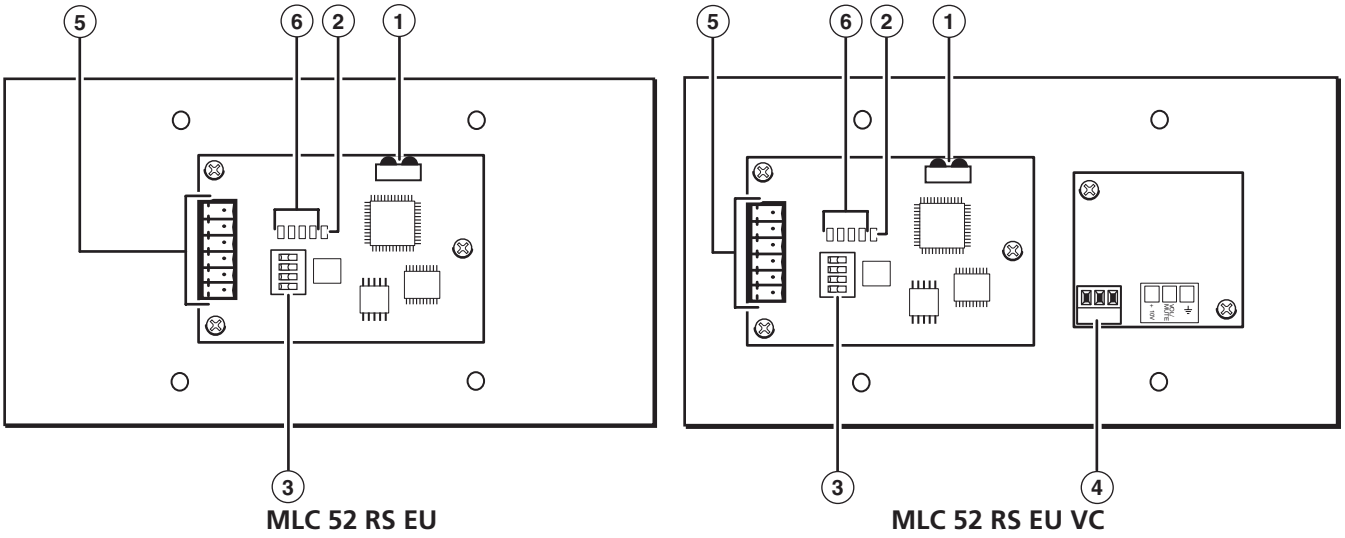

Figure 5. MLC 52 RS EU and MLC 52 RS EU VC Rear Views

① **IR Learner/Transmitter** — These sensors allow for IR control of the MLC and for IR Learning. The two LEDs (one for transmitting, one for receiving) send and receive IR signals, enabling the MLC to learn commands and clone configurations from another MLC 52. The IR remote control must be pointed directly at these LEDs for best results.

The MLC can "learn" IR commands in order to control the display device. IR Learning of device control codes is necessary only if there are no RS-232 codes available for that device or if you need to customize the driver. See "**Configuring Using IR Learning**," later in this section, for the IR Learning procedure.

You can also perform IR learning via the MLC 52 configuration software. See the MLC 52 Configuration Program help file for the procedure.

② **Enable Macro LED** — The LED located immediately above or to the right of the four green IR LEDs is labeled E, for Enable Macro. This LED lights amber when you place a button in macro mode (see "**Setting Up Button Macros Using IR**," later in this section).

③ **Configuration switches** — When set to On, these DIP switches place the MLC in IR learning or data transfer mode, or disable IR repeats.

- **Switch 1:** Enables IR learning.
- **Switch 2:** Enables data transfer, such as cloning the current MLC configuration onto another MLC 52 (see "**Configuring Using IR Data Transfer (IR Beaming)**," later in this section).
- **Switch 3:** Disables IR repeats during playback. For most applications, this switch is placed in the off position.

Switch 4 is not used.

④ **Volume control (VC models only) connector** — Connect an amplifier such as the Extron MPA 152 or a PoleVault switcher to this direct-insertion captive screw connector to enable the volume control knob on the MLC 52 VC front panel to raise and lower the volume on the display device via the amplifier or switcher.

NOTE: This port must be connected only to an Extron device such as a PoleVault® PVS switcher, an MP Series microphone-to-line preamplifier, or an MPA Series audio amplifier.

⑤ **Display control and power connector** — This shared six-pole, 3.5 mm captive screw connector is used for IR and RS-232 control of the display device and for DC power. See "**Wiring the Control Connector**," later in this section, for information on how to connect supported devices to the MLC.

NOTE: The RS-232 projector control port is present on this connector but not functional on the IR models. The port is functional only on the RS models.

⑥ **IR Learning indicators** — Each button on the MLC front panel has four memory blocks, which can be programmed with up to four IR (or RS-232) commands. The IR Learning indicator LEDs provide visual feedback indicating the following:

- Which of the four memory blocks contains a command
- Which of the four memory blocks is ready to be programmed or configured
- The IR learning status of the controller

See "**Configuring Using IR Learning**," later in this section, for details.

Installation Steps

CAUTIONS: Installation and service must be performed by authorized personnel only. UL listed electrical boxes are recommended.

If using an electrical box, ensure that it is grounded properly.

To install and set up the MLC:

1. If applicable, prepare the installation site: cut a hole in the wall, install the electrical box or mounting bracket ("mud ring"), and prepare the cables. See "**Mounting the MLC 52**," later in this section, and "**Mounting an Electrical Box**" in the "Reference Information" section; or see the instructions provided with the optional faceplate, mounting device, or electrical box.

   NOTE: Metal and brushed aluminum versions of the one-gang and VC faceplates are available as options for US models.

2. Make and install button labels as desired (see "**Replacing Button Labels**," later in this section).
3. If you want to use a different faceplate from the one that is attached, remove the installed faceplate from the MLC, and replace it with the new one (see "**Replacing the Faceplate (US Models Only)**," later in this section).
4. Attach cables to the rear of the MLC and to the display device; an MPA Mini Power Amplifier (if applicable); and optional IR Link, IR Emitters, or IRL 20.
5. Connect power cords and turn on all the devices, including the MLC.
6. Configure the controller using one of the following methods:
   - IR learning (See "**Configuring Using IR Learning**," later in this section.)
   - IR data transfer (beaming) (See "**Configuring Using IR Data Transfer**," later in this section.)
   - Configuration program (See "**Using the MLC 52 Configuration Program**" in the "Serial Communication" section to start the program. See the configuration program help file for detailed information on using the software.)
7. Test the system: press the MLC buttons, watch the display, and listen to the audio output to determine whether the output devices are responding correctly (powering on and off, switching inputs, and so on). If not, ensure that all devices are plugged in and receiving power. Check the cabling, and make adjustments as needed.
8. Mount the MLC to the wall or furniture.
   a. Disconnect the MLC power supply at the power source end (not at the MLC end).
   b. Disconnect power from the other devices.
   c. Secure the faceplate onto a UL-approved electrical wall box, a mounting bracket, a wall, or furniture (see "**Mounting the MLC 52**," later in this section).
   d. Restore power to the MLC and to the connected devices.

Replacing the Faceplate (US Models Only)

You can replace the provided plastic faceplate with an optional metal one — the MLM 52 1GWP one-gang metal faceplate (part number 70-528-02 or -03) or the MLM 52 VC two-gang metal faceplate (part number 70-538-02 or -03), both of which are available in black or white. You may also wish to replace your plastic faceplate with one of a different color. (Two plastic faceplates are provided, one black and one white. MLM 52 faceplate replacement kits can also be ordered; see "**Optional Accessories**" in the "Reference Information" section for ordering information).

NOTE: See the MLM 52 1GWP or the MLM 52 VC user guides for further information on faceplates for the MLC 52.

To replace the faceplate:

1. Hold the MLC face down. Use a small Philips screwdriver to remove the three attachment screws (marked ① in figure 6 on the next page) from the back of the MLC, and keep them to replace later.

   If installing a metal faceplate, do not remove the screws from the front of it.
2. Lift the MLC off the faceplate (see figure 7 on the next page).
3. Place the MLC onto the new faceplate, aligning the MLC buttons with the openings in the new faceplate and the three screw holes with the faceplate standoffs.
4. Replace the three screws removed in step **1** and tighten them.

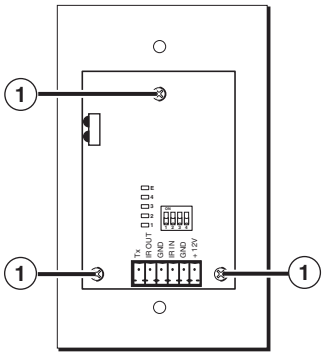

Figure 6. Screws to Remove from the MLC Faceplate

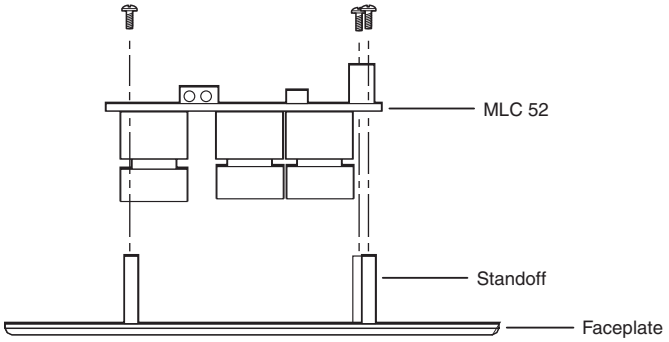

Figure 7. Installing the MLC onto a New Faceplate

Replacing Button Labels

The button caps are prelabeled for your convenience. However, you can replace the labels with others that are included with the MLC, as follows:

1. The button assembly consists of a clear lens cap, the button label, and a white diffuser (see figure 9 on the next page). Remove the button assembly by inserting a small, flat-bladed screwdriver between the base and the diffuser of the button to gently pry the button assembly away from the base, as shown in the drawing below.

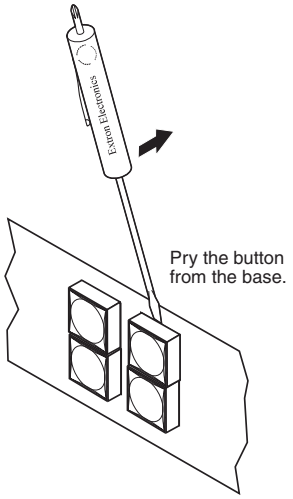

Figure 8. Pry the Button Cap Off the Button Assembly

2. Locate the small corner notch on the lens cap, and slide the screwdriver between the lens cap and the diffuser (see ② in the illustration below).
3. Using a rotating motion of the screwdriver, carefully pry the two pieces apart (see ③ in the illustration below).

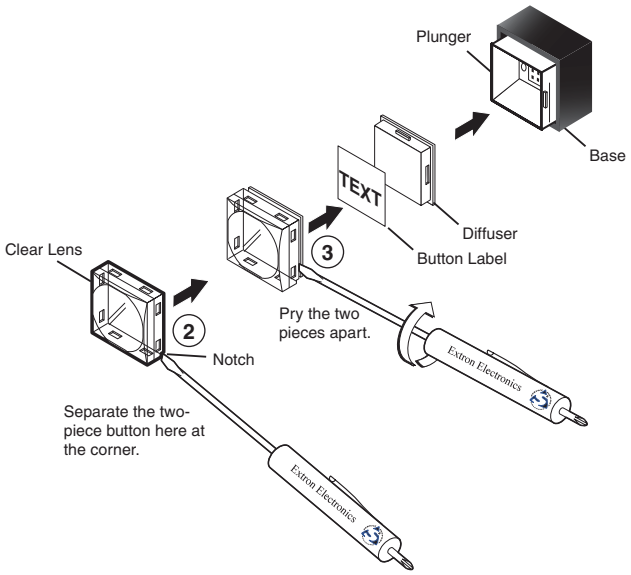

Figure 9. Replacing a Button Label

4. Lift out the transparent square label that you want to replace. You may need to use a small screwdriver to gently pry the label out.
5. Detach one of the preprinted labels or a blank one from the label sheets included with the MLC 52. Remove the label from the backing and, if applicable, peel the protective film from the front of the label.

> **NOTE:** If you want to create customized labels, you can use a label maker, such as the Brother® P-touch®, and clear label material to print text to place on the blank labels. Cut the labels so that they are square and measure ½ inch on each edge.

6. Insert the new label into the clear button cap, align the white backing plate with the cap, and firmly snap it into place.
7. Gently, but firmly, press the reassembled button into place on the MLC 52 front panel.
8. Repeat steps **1** through **7** as needed to relabel other buttons.

Wiring the Control Connector

The display and source control connector allows you to connect cables for IR devices, RS-232 devices (RS models only), and AC power to the MLC. The illustration below shows the MLC control connector pin assignments that are described on the following pages.

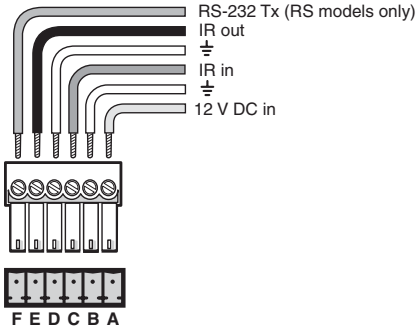

Figure 10. Pin Assignments for the MLC 52 Display and Source Control Connector

The ports in this connector, from left to right, perform the following functions:

- **F (Tx)** — Transmits the RS-232 signal for projector control.

  NOTE: Although this port is present on both the IR and the RS models, it is functional only on the RS models.

- **E (IR out)** — Used for connecting an IR emitter to issue IR commands. Up to two emitters can be wired to this port.
- **D (GND)** — Ground for IR or RS-232 projector control
- **C (IR in)** — Used for connecting an optional IR Link or IRL 20, so that an IR remote can control the MLC.
- **B (GND)** — Ground for the +12 VDC power
- **A (+12 V)** — Power input for the product (12 VDC)

NOTE: The two-gang MLC 52 IR VC and MLC 52 RS VC have the same control ports as the one-gang models.

Wiring for RS-232 Control (RS Models Only)

The MLC 52 RS and the MLC 52 RS VC send out RS-232 commands via the Tx port for controlling a display device.

If you have an RS model and want to control the device via RS-232, connect a cable between the device and this 3.5 mm, 6-pin direct insertion captive screw connector.

Wiring varies depending on the device model. In most cases, only the transmit (Tx) and ground connections are needed.

- Connect the transmit wire to the F pin.
- Connect the ground wire to the D pin.

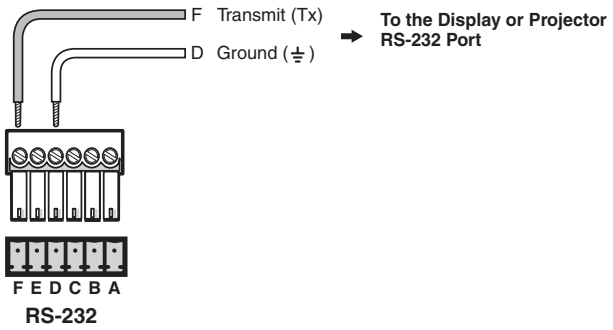

Figure 11. Wiring for RS-232 Control (RS Models Only)

Extron recommends using the CTL Series Comm-Link Control System Cable, available in lengths of 500 feet (150 m) (non-plenum only) and 1000 feet (300 m) (plenum and non-plenum) for this connection. See "**Recommended Cables**" in the "Reference Information" section for ordering information.

Guides for connecting and controlling specific models of display devices are available on the Extron web site. See the display device user guide for the device pin assignments in order to determine which of the cables wires to connect to the MLCs RS-232 pins.

Wiring for IR Control

If you intend to control display or input devices via IR commands from the MLC, you can connect Extron IR emitters to the IR Out pin of the control connector. Up to two IR emitters can be connected via this connector at one time. Wire the connector as shown in the following illustrations.

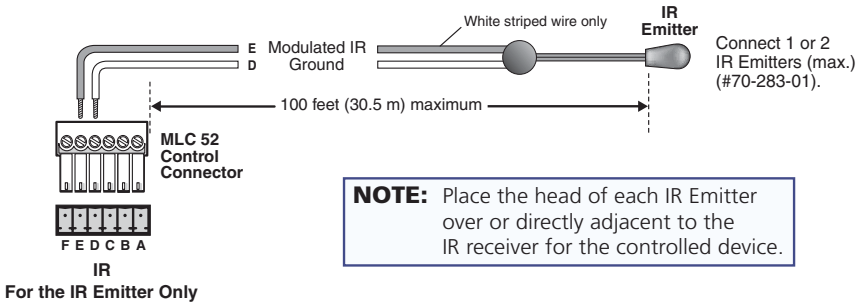
E Modulated IR
D Ground
White striped wire only
IR Emitter
Connect 1 or 2 IR Emitters (max.) (#70-283-01).
100 feet (30.5 m) maximum
MLC 52 Control Connector
F E D C B A
IR
For the IR Emitter Only
NOTE: Place the head of each IR Emitter over or directly adjacent to the IR receiver for the controlled device.

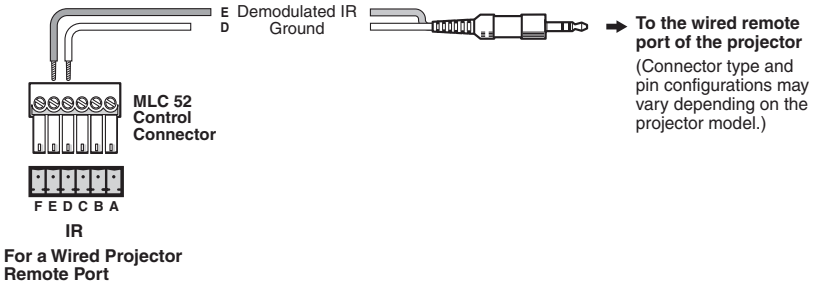
E Demodulated IR
D Ground
To the wired remote port of the projector
(Connector type and pin configurations may vary depending on the projector model.)
MLC 52 Control Connector
F E D C B A
IR
For a Wired Projector Remote Port

Figure 12. Wiring the Control Connector for IR

Wiring an IR Link

An optional IR Link can be connected to the IR In pole of the control connector to enable the MLC to receive IR signals from the IR 452.

NOTE: Only one IR Link or one IRL 20 can be attached to the MLC 52 at one time.

To wire the IR Link for use with your MLC:

1. Prepare the site where the IR Link will be installed and install a wall box, following the directions in the *IR Link User's Manual*, provided with your IR Link equipment.
2. Cut the required length of cable to go between the MLC 52 and the IR Link. The power cable length should not exceed 150 feet (45.7 m).
3. Attach a 3.5 mm, 5-pin captive screw connector to one end of the cable and a 6-pin captive screw connector to the other end. Only three wires are required:
   - A (MLC) to A (IR Link)
   - B (MLC) to B (IR Link)
   - C (MLC) to D (IR Link)

   Connect the wires as shown in the illustration below. Connectors are included with the IR Link, but the cable must be purchased separately.
4. Plug the 5-pin connector into one of the IR Link communications connectors.
5. Plug the 6-pin connector into the rear panel control port of the MLC 52.

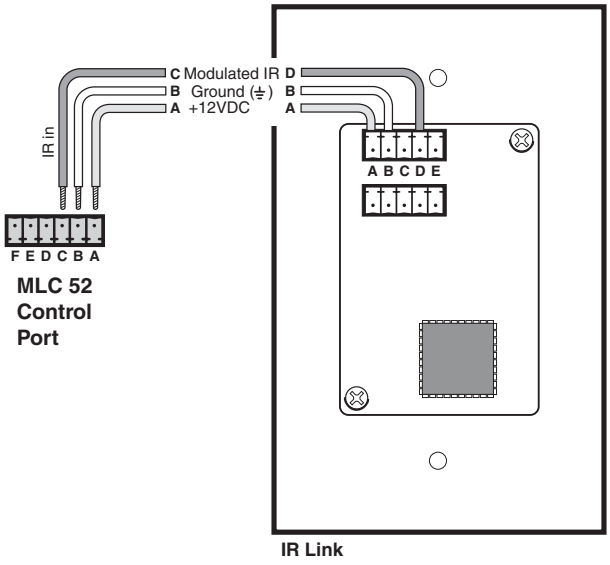

Figure 13. Wiring the IR Link for IR Remote Control

NOTE: Do not connect more than one IR Link, either in parallel or in series.

Wiring an IRL 20

The Extron IRL 20 is a hard wired IR signal receiver that can be used with the MLC 52 and the IR 452 remote control. The IRL 20 receives a signal via its front panel (or an IR sensor) from the IR 452 remote control, and outputs a modulated IR signal via an IR emitter.

Wire and connect the IRL 20 to the MLC 52 as follows:

1. If it has not been done, cut the required length of Extron CTL (Comm-Link) cable to connect the MLC 52 to the IRL 20. See "**Recommended Cables**" in the "Reference Information" section for cable part numbers.

   The maximum total distance between an Extron controller and the IRL 20 is 150 feet (45.7 m).

2. Attach a 3.5 mm, 5-pin captive screw connector to the end of the cable that will be plugged into the IRL 20.

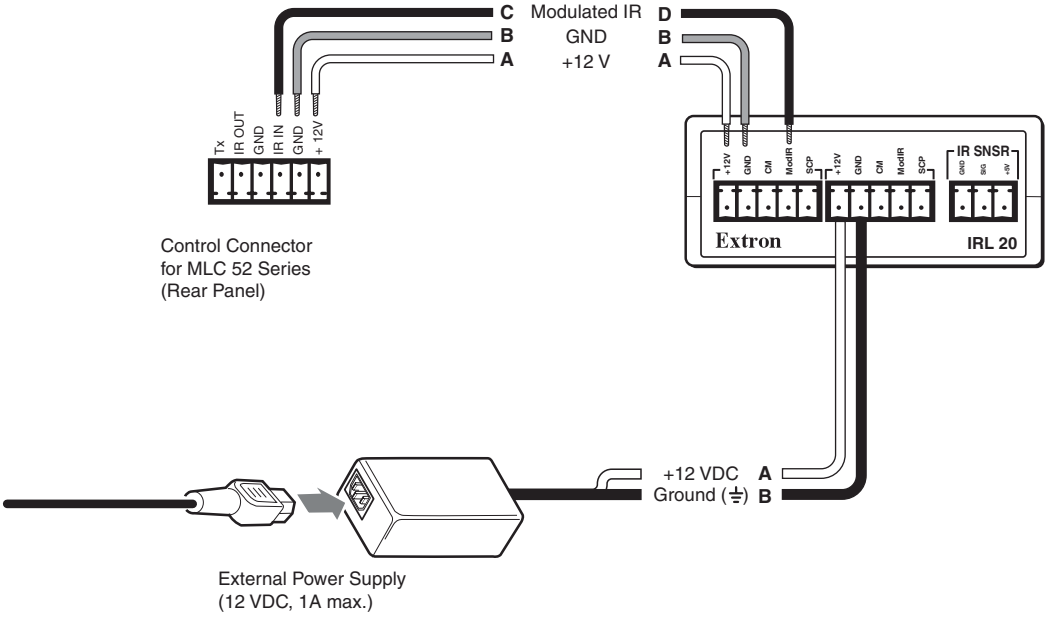

Figure 14. Wiring an IRL 20

3. Connect the wires on the other end of the cable to the provided 3.5 mm 6-pin captive screw connector.
   - A (MLC) to A (IR Link)
   - B (MLC) to B (IR Link)
   - C (MLC) to D (IR Link)

   NOTE: Do not connect more than one IRL 20 or IR Link (either in parallel or in series) to an Extron device.

4. Plug the 5-pin connector end of the cable into one of the IRL 20 communications connectors.
5. Plug the 6-pin connector end of the cable into the control port on the MLC 52 back panel.
6. Connect power to the MLC or the IRL 20.

   NOTE: The +12 VDC power is shared between the MLC 52 and the IRL 20 when they are connected. You can wire the power supply to either the MLC or the IRL 20.

Wiring the Power Connector

The control connector also contains a power connector for the MLC 52. Connect the supplied external 12 VDC, 1 A power supply to this port to power the MLC as shown in the following diagram.

NOTE: The Extron PS 1210 (included) and other Extron power supplies can be used with the MLC 52.

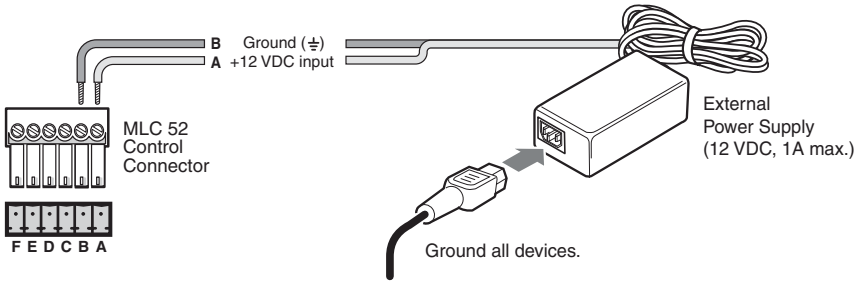

Figure 15. Connecting the MLC 52 to the External Power Supply

NOTE: Check the polarity of the power supply before connecting it to the MLC.

CAUTIONS: The power supply must not be permanently fixed to the building structure or similar structures.

The power supply must not be located within environmental air handling spaces or the wall cavity.

The installation must be in accordance with the applicable provisions of the *National Electrical Code ANSI/NFPA 70, Article 725* and the *Canadian Electrical Code, Part 1, Section 16*.

The power supply must be located within the same vicinity as the Extron A/V processing equipment in an ordinary location, Pollution Degree 2, secured to a podium, a desk, or an equipment rack within a dedicated closet.

Always use a power supply specified by Extron for the MLC 52. Use of an unauthorized power supply voids all regulatory compliance certification and may cause damage to the supply and the MLC.

Configuring the MLC 52 Using IR

The MLC 52 can be programmed via IR by the following methods:

- IR data transfer from an MLC 52 that has been configured
- IR learning from your projector remote control

Configuring Using IR Data Transfer (IR Beaming)

You can configure your MLC 52 by transferring button configuration data to it from another configured MLC 52 via the two IR LEDs on the back panels of the MLCs. With this method, you replicate (clone) the other MLC configuration on your own unit without the use of software or cables.

The following transfers are allowed:

- From an RS model to another RS model
- From an IR model to another IR model
- From an IR model to an RS model

To transmit configuration data via IR, both the transferring and the receiving MLCs must be removed from the wall, electrical box, or furniture, and both must be powered on. The MLC that is already configured can be powered by an external power supply, or it can share a power supply with the unit that will be configured.

NOTE: All MLC 52 models use the same IR data transfer procedure.

1. On the MLC from which the configuration will be transferred (the donor unit), set **all** configuration switches to Off (down).

Transmitting MLC

2. On the MLC that will receive the data, set switch **2** to On (up) and all the other switches to Off (down).

Receiving MLC

3. Position the two units so that the IR Transmit and Receive LEDs of both MLCs are facing each other, and no more than 6 inches (15 cm) apart.

Data Transfer

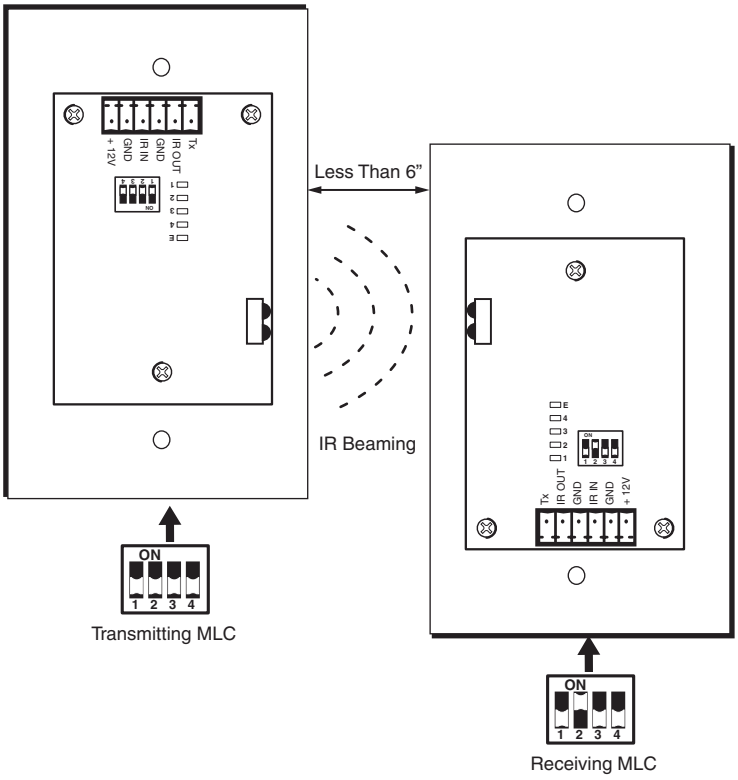

Figure 16. Setting Up Transmitting and Receiving Units for Wireless Data Transfer

The data transfer begins when the receiving unit detects the transmitting unit. The process takes 15 to 20 seconds to complete, though it may take longer if the transmitting unit has multiple commands programmed on each button.

The front panel buttons act as data transfer progress indicators. While data is being transferred, the buttons on both the transmitting and the receiving MLCs blink sequentially in clockwise order, starting with the On button in the upper-left corner (see the diagram below). This cycle repeats until transfer is complete.

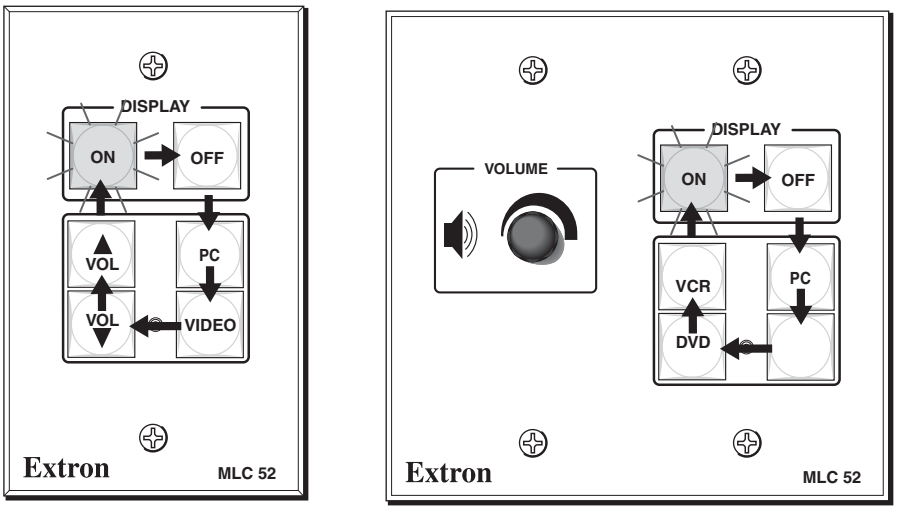

Figure 17. Order in which the Buttons Blink during Data Transfer

After approximately 17 percent of the data has been transferred, the On button lights and remains lit to maximum brightness. After another 17 percent has been transferred, the Off button lights to maximum brightness also and remains lit. After each increment of 17 percent of the data has been transferred, the next button in clockwise order lights brightly. When a button becomes permanently lit, the remaining buttons continue to blink in clockwise rotation, until the transfer process is complete and all buttons are remain steadily lit.

The following table shows how each percentage of transferred data is indicated by button lighting.

Percent Complete	MLC 52 Buttons Lit	MLC 52 VC Models Buttons Lit
Less than 17%	On	On
18% to 36%	Off	Off
37% to 54%	PC	PC
55% to 72	Video	(blank)
73% to 90%	Vol <	DVD
90% to 100%	Vol >	VCR

When the transfer is complete, all buttons on each unit remain brightly lit until a button is pressed on the unit.

NOTE: If the transmission is interrupted (for example, the two units become separated so that the IR LEDs are no longer in direct line of sight of each other) and the conditions necessary for transfer are subsequently restored, the two units restart the transfer process.

4. When the data transfer is complete, do either of the following:
   - If you want to repeat the transfer process to configure another MLC 52, repeat steps **2** and **3** for the unit that is to be configured. Press any button on the donor unit. The transfer process restarts.
   - If you are finished performing data transfers, return configuration switch 2 on the receiving MLC to the Off (down) position. Press any button on both units to return them to the state they were in before the transfer. All buttons dim except for those that were bright previously. Reinitialize the receiving unit by pressing any of its front panel buttons.

Configuring Using IR Learning

You can also configure the MLC 52 by using IR Learning, which does not require configuration software. By this method, you can program the functions that are on the remote control for your display device onto the MLC front panel buttons. This procedure must be performed before the MLC is mounted on a wall or furniture, so that the IR Transmit/Receive LEDs are accessible. If the MLC is already installed, remove it from the mounting surface.

To program the MLC via IR Learning:

1. Apply power to the MLC 52.
2. On the rear panel, set configuration switch 1 to On (up). All front panel buttons should be dimly lit.

3. Press the button on the MLC that will store the IR code that you want the MLC to learn. The following takes place on the MLC:
   - The front panel button that you pressed begins to blink, indicating that it is ready to be programmed. While the button is blinking (5 seconds), you can program it with the desired command. If no IR command is entered within 5 seconds, the button stops blinking.
   - On the rear panel, the IR learning LED for the next button memory block available for programming begins to blink. (See "**IR learning indicators**," ⑥ under "Rear Panel and Cable Connections," earlier in this section, for more information on the IR learning LEDs.)
   - The LED that indicates how many commands have been programmed onto the button illuminates and remains lit.

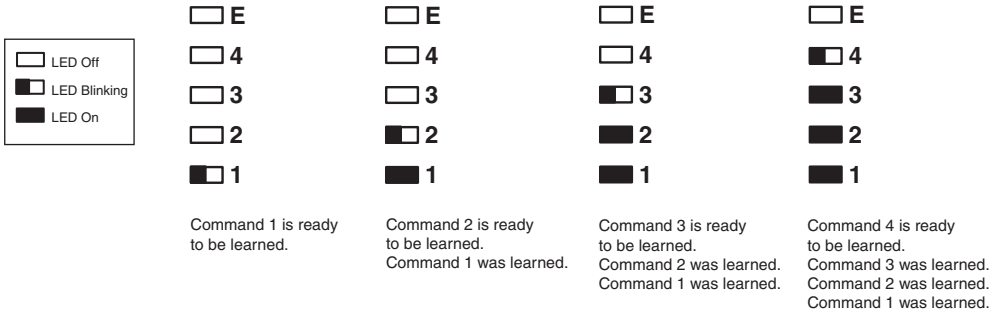

Figure 18. Activation of LEDs During Button Configuration

4. Hold the remote control of the display device between 4 and 14 inches (10 to 36 cm) away from the MLC and point it at the IR Transmit/Receive LEDs on the MLC. **Within 5 seconds of pressing the MLC button** (step **3**), press the button on the remote whose function you want the selected MLC button to learn. When the IR command has been learned successfully, the IR learning LEDs blink in rapid progression from the top to the bottom, then back to the top.

   NOTE: For repeating command codes, such as those that increment and decrement a function (for example, turning the volume up and down), hold the button on the projector remote control for at least 3 seconds.

   If no IR command is detected within 5 seconds, the LEDs and the front panel button time out and stop blinking.

   - If the IR code was learned, the rear panel LEDs blink rapidly in succession from the top down, then back up to the top.
   - If the IR code was not learned, the rear panel LEDs blink in random order.

5. If you do not want to program additional commands on the button, repeat steps **3** and **4** for the next button that you want to program.

   If you want to program another command to the same button, press the button again (you can program up to four commands on one button). The next IR learning LED on the rear panel begins flashing (for example, if you have already programmed two commands on this button, the third LED from the bottom flashes).

6. When you are finished programming buttons on the MLC, set configuration switch 1 on the rear panel to Off (down).

7. Press the buttons that you configured to verify that the commands you entered have been learned. If you have an IR Emitter connected on the IR output, it should blink (see "**Wiring for IR Control**," earlier in this section).

Removing IR Commands from a Button

If you want to delete a command that has been programmed onto a button, you must remove all the commands programmed to that button, as follows:

1. While the MLC 52 is powered on, set configuration switch **1** to On (up).
2. Press the button for which you want to delete commands, then within 2 seconds press the same button again. The IR learning LEDs turn off.
3. Verify that all commands were erased from the button by pressing the same button again. If the commands have been erased, only LED 1 (the bottom LED) blinks; the other LEDs remain off.
4. When finished removing commands, set switch 1 to Off (down).

Setting Up Button Macros Using IR

Buttons function in either **toggle** mode or **macro** mode. By default, all the buttons (except the On and Off Display buttons) are in toggle mode. This means that each press of the button issues one command — the next in sequence of the four commands programmed to the button (each button can store up to four commands).

In macro mode, a single press of a button issues all the commands (up to four) that have been programmed on that button, in the order they were programmed, at 1.5-second intervals. An example of a button macro application would be turning on multiple projectors or displays by pressing one button, one time.

To program an IR macro for a button:

1. Ensure that power is applied to the MLC 52.
2. Set configuration switch **1** on the rear panel to On (up). All front panel buttons light dimly.
3. Program the buttons with the desired commands. See "**Configuring Using IR Data Transfer (IR Beaming)**" or "**Configuring Using IR Learning**," earlier in this chapter, for programming procedures.

   NOTE: You must program the commands onto the button prior to setting it for macro.

4. To put the button in macro mode, press and hold it for 3 seconds. The orange LED on the back panel, labeled "E" (see figure 18) flashes rapidly five times, then turns off, indicating that the button is now configured for macro mode. Release the button. The next time that the button is pressed while configuration switch 1 is in On position, the orange "E" LED lights, indicating that the button is in macro mode.

   To take a button out of macro mode, press and hold the button for 3 seconds. The orange "E" LED turns off.
5. Set configuration switch 1 to Off. Verify that the commands have been properly learned by pressing the button you programmed. The commands should be issued in succession at 1.5-second intervals.

   NOTE: A button is able to learn commands while in macro mode if any of its four command memory blocks are open (not yet programmed with a command).

Configuring a Single Button for Input Source Selection Using IR

If you want to use only one button to select your input sources, you must program the button with one command for each source (up to four). Only one button needs to learn IR commands; and it has enough memory blocks to learn four input selection commands. To use this programmed button to select an input, press it repeatedly to cycle through all the inputs until you reach the desired one.

To program a single button to select multiple inputs:

1. Disconnect power from the MLC 52.
2. To make the one programmed button easily recognizable, replace all but one of the input (Video, PC, DVD, and VCR) button labels with a provided Not Used label, or remove the input labels and leave the buttons blank.
3. Apply power to the MLC.
4. Set configuration switch **1** to On (up). The front panel buttons light dimly.
5. Press the MLC button that will store the input selection IR codes. The button blinks for 5 seconds, during which time it is able to learn codes. On the rear panel, the first (bottom) IR learning LED starts flashing.) If a command is not entered within 5 seconds, the button and LED stop blinking, and you must press the button again to put it in back in learn mode.
6. Within 5 seconds, press the display device remote control button from which the MLC button will learn the first input selection command. If the command has been learned successfully, the Learning LEDs on the rear panel blink in rapid progression from the top LED to the bottom, then back to the top.

7. To program a second input selection command on the same button, press the button again. The button and the second rear panel IR learning LED begin to blink. On the remote control of your display device, press the next button whose function you want the MLC button to learn.
8. Repeat the procedure described in steps **5** and **6** for additional commands you want to add to the button you are programming. Each MLC button can be programmed with up to four commands.
9. When finished programming the input selection button, set rear panel DIP switch 1 to Off (down). Verify that the button has been programmed correctly by pressing it repeatedly to cycle through the inputs.

Setting Up an MLC 52 VC Model with an Extron Amplifier

If you have an MLC 52 IR VC or an MLC 52 RS VC model, it can be connected to an optional Extron amplifier, such as the MPA Power Amplifier Series, the MLP Preamplifier series, or a PoleVault® PVS switcher. The dedicated volume control knob on the VC controllers controls the audio output of an Extron MPA 152 or MPA 401 power amplifier, an MP series preamplifier, or a PoleVault PVS switcher, to which speakers for the system are connected.

Wiring the VC Port

To set up this configuration, wire the volume control port to the amplifier as shown in the following diagram. Set up the volume control, following the instructions in the amplifier user guide.

NOTE: Use only Extron devices with the VC port.

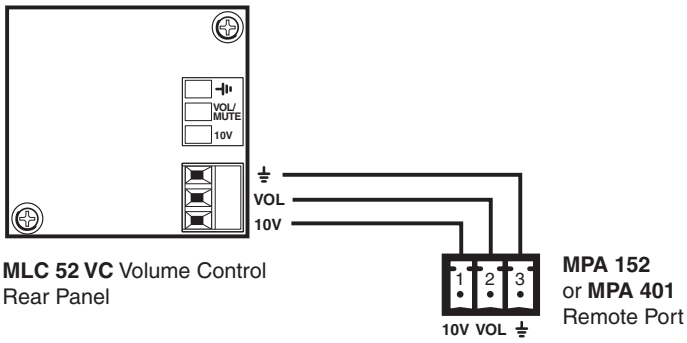

Figure 19. Wiring the VC Volume Control to an MPA Remote Volume Control Port

The diagram on the next page shows an example of a system that uses an MLC 52 VC model with an MPA amplifier.

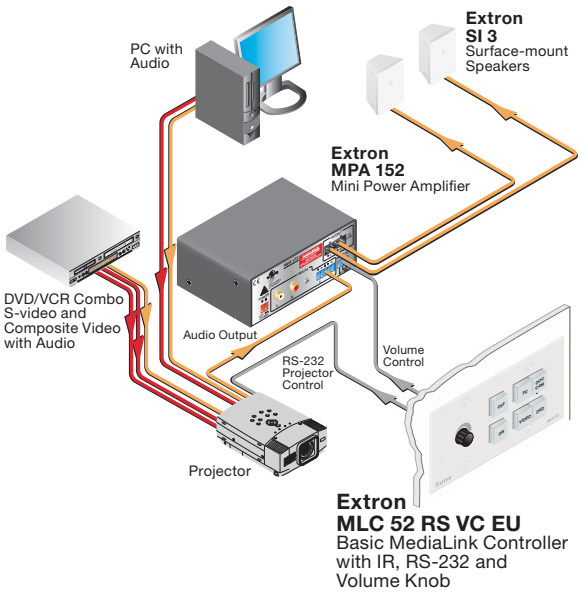

Figure 20. Application Diagram of an MLC 52 RS EU VC with an MPA Series Power Amplifier

Requirements for the MLC 52 VC

To set up a system that contains an MLC 52 VC model and an Extron MPA power amplifier, an ML series preamplifier, or a PoleVault PVS switcher, you must ensure that the following conditions are met:

- The projector must have dedicated video and audio inputs for each source used in the system.
- The projector must have a switched audio output. On most projectors, this connector is labeled as "Monitor Output" or "Audio Output," as shown in the illustration on the next page. With a switched audio output, the projector outputs the audio from the selected video source.
- The system must incorporate an Extron device.

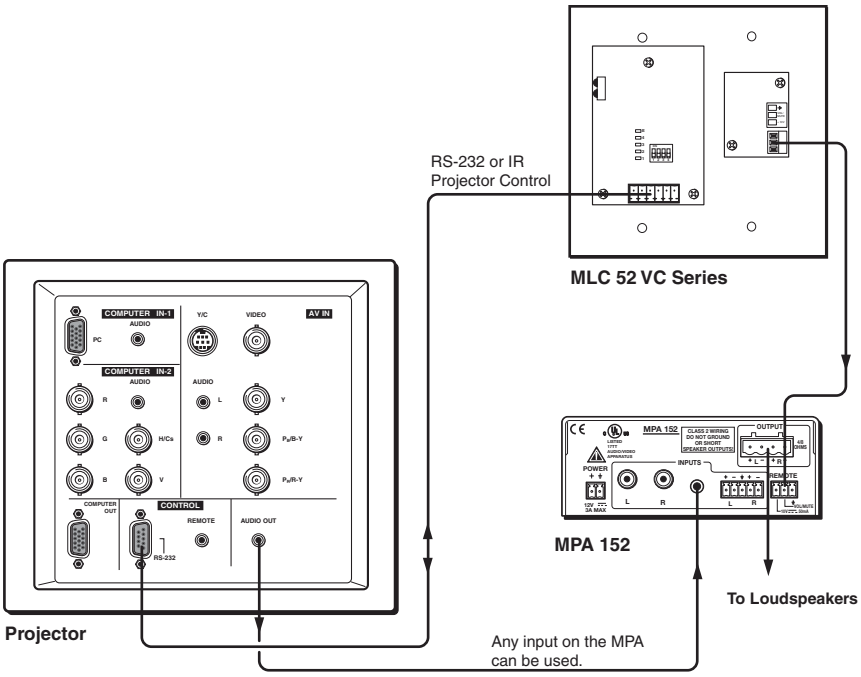

Figure 21. Wiring an MLC 52 VC Controller and an MPA Series Power Amplifier to a Typical Projector

NOTE: Audio is now controlled from the MPA instead of from the projector. For best results, ensure that the audio volume of the projector is set to maximum (assuming that the monitor output for audio is variable).

Configuring the MLC 52 IR VC and MLC 52 RS VC Vol Buttons

By default, the MLC 52 has two buttons on the front panel programmed for volume control (Vol ▲ and Vol ▼). However, on the MLC 52 VC models, these buttons are not needed for volume control and can be programmed for other uses. To reprogram the Vol buttons, you can use IR Learning (see "**Configuring Using IR Learning**," earlier in this section) or the MLC 52 configuration program (see the program help file).

Mounting the MLC 52

After the system has been cabled, configured, and tested, the MLC can be installed in the wall or furniture. Follow the instructions appropriate to the mounting option you selected.

Preparing the Site

NOTE: The installation of the MLC 52 must conform to national and local electrical codes and to the equipment size requirements.

Installation using a UL listed wall box is recommended for most mounting options, but for US models a mounting bracket can be used instead. To cut a hole in the mounting surface for the controller, use the dimensions from one of the rough-in templates provided under "**Templates for the MLC 52 and MLC 52 VC (US Models)**" in the "Reference Information" section as a guide to measure and mark the hole. The templates provide measurements for installing the MLC with either an electrical box or a mounting bracket.

CAUTION: The templates are not to scale and are provided for reference only.

- The standard US MLC 52 model includes a one-gang plastic faceplate, which can be installed on a standard one-gang US electrical box that is at least 1.75 inches deep. Mounting brackets ("mud rings") are also included.
- The US MLC 52 VC model includes a two-gang plastic faceplate, which can be installed in a standard US two-gang electrical box. Mud rings are also included.
- The MLC 52 EU and MLC 52 VC EU models have 2-gang plastic or brushed aluminum faceplates that can be installed on standard two-gang European electrical boxes.
- The standard MLC 52 MK model includes a one-gang plastic or brushed aluminum faceplate, which can be mounted on a 47 mm deep single MK electrical box.
- The MLC 52 VC MK model includes a two-gang plastic or brushed aluminum faceplate, which can be mounted on a 47 mm deep double MK electrical box.

NOTE: EU and MK models must be mounted in an electrical box.

To prepare the site:

1. Choose a location that will allow cable runs without interference. Allow enough depth for both the wall box and the cables. You may need to install the cables into the wall or furniture before installing the controller. If using an electrical box to wall mount the controller, locate a stud to which the box will be attached.
2. Measure and mark the portion to be cut out of the mounting surface.

   For US models, use the appropriate template and faceplate dimensions provided "**Templates for MLC 52 and MLC 52 VC (US Models)**" in the "Reference Information" section as a guide to measure and mark the area to cut out. If you are using a mounting bracket, see the template that came with the bracket.
3. Cut out the opening in the wall or furniture.

Mounting the MLC to an Electrical Box

You can mount the MLC 52 in an electrical box or a mounting bracket. (For information on mounting the electrical box itself, see "**Mounting an Electrical Box**" in the "Reference Information" section. To attach a mounting bracket to a wall or furniture, see the instructions provided with the bracket.)

CAUTION: If using an electrical box, ensure that it is grounded properly.

1. If you want to install a different faceplate, attach the MLC to the desired faceplate using the provided screws (see "**Replacing the Faceplate (US Models Only)**," earlier in this section).
2. Disconnect power at the source and connect all cables to the MLC.
3. Insert the MLC into the wall or furniture.

4. Secure the MLC to the wall box or mounting bracket with the provided machine screws (as shown in the following illustrations), or attach it directly to the furniture with wood or metal screws.

NOTES: If the MLC (and the IR Link, if applicable) is not mounted to a grounded metal wall box:

- Ground each faceplate directly to an earth ground, or
- Tie each faceplate to its circuit board and power supply via a ground pin on one of the connectors.

Do not tie a product faceplate to both a separate earth ground and the circuit ground (via a connector pin). If you tie a product to two different ground sources, you may introduce ground loops or other grounding-related problems into the system.

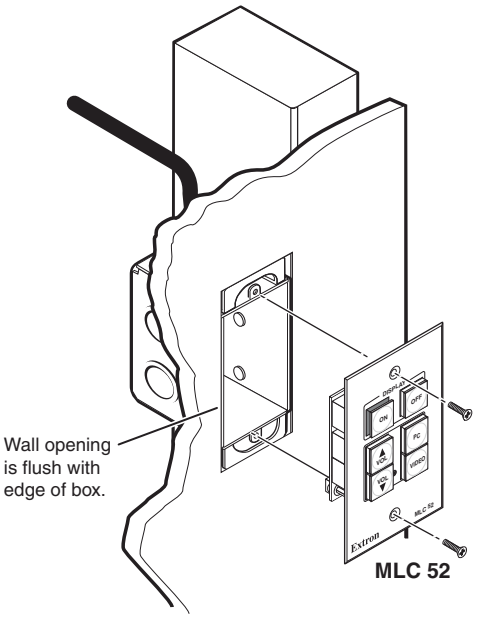

Figure 22. Mounting the MLC 52 in an Electrical Box

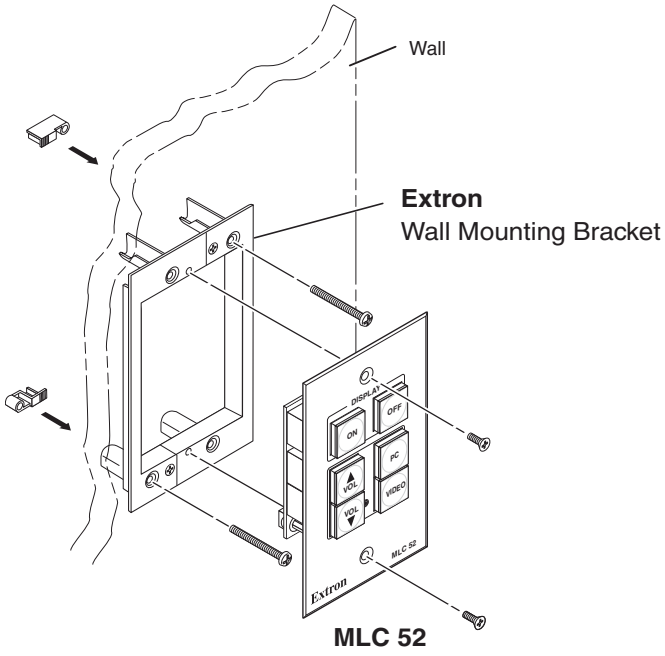

Figure 23. Mounting the MLC 52 to a Mounting Bracket (Mud Ring)

Mounting the MLC to a Wall or Furniture

1. With all cables attached to the MLC and power disconnected at the source, insert the MLC into the wall or furniture.
2. Fasten the MLC and faceplate directly to the furniture or wall using wood screws.

Operation

This section describes the front panel features of the MLC 52 models and provides procedures for operating the controllers. Topics that are covered include:

- **Front Panel Features**
- **Powering the Display Device On and Off**
- **Selecting Inputs**
- **Operating the MLC 52 Using IR Remote Control**
- **Resetting**
- **Locking the Front Panel (Executive Mode)**

Front Panel Features

The MLC 52 front panel contains six buttons, each of which can be programmed with up to four IR or RS-232 commands or functions. It also contains a configuration port, through which the MLC 52 can be connected to the RS-232 port on a computer to program the MLC buttons, update firmware, and save the current MLC configuration to the computer hard drive.

The MLC 52 VC models each have an integrated volume control knob. On these models, the two buttons normally used for volume control on the standard MLC 52 models can be programmed to control additional outputs or other projector or display functions.

Buttons on the Front Panel

The front panel backlit buttons light amber when the MLC 52 is powered on. Buttons that are not currently selected and active are lit more dimly (25 percent brightness) than the selected ones (100 percent brightness).

When the MLC is delivered, the buttons are labeled. (You can relabel them by replacing the labels with others provided with the MLC (see "**Replacing Button Labels**" in the "Installation and Configuration" section). You can program commands onto these buttons (up to four commands per button) using IR Learning, the MLC 52 configuration software via the configuration port, or IR data transfer from a configured MLC 52.

Switch modes

Depending on the driver that you load to your MLC (see "**Loading Extron Drivers**" in the "Serial Communication" section), each of the buttons is preconfigured in one of the following switch modes:

- **Single switch mode:** In this mode, the button operates independently of the other buttons. Pressing a button in this mode does not affect any other button.
- **Input mode:** Buttons in this mode are grouped together so that only one of them can be active at a time. When one button is pressed and activated, it becomes fully lit, while the other (inactive) buttons are dimmed to 25% brightness. When you press one of the buttons on the front panel that are in input mode, all other buttons in input mode become inactive.

- **Volume mode:** This mode is available only on the standard (not VC) MLC models, and only for the two buttons that are labeled Vol ▲ and Vol ▼. When an RS-232 driver that contains a volume table is part of the configuration, pressing a button in volume mode accesses the volume table of the driver. Press and **hold** the appropriate button to raise or lower the volume of the projector or display by the amount specified in the volume table. When the MLC is in volume mode, the button labeled Vol ▲ always increases the volume; Vol ▼ lowers it.

  NOTE: If the driver for your display device contains a volume table, a single press of the volume button has no effect. You must press and hold the button to increase or decrease the volume.

- **Power mode:** The two Display buttons at the top of the front panel, labeled On and Off, are permanently fixed in power mode. This mode is similar to input mode. The two Display buttons are mutually exclusive; if you press one, the other one becomes unlit.

To change the switch mode of any button, you must use the configuration software. (See the configuration program help file for the procedure.)

Front Panel Components

The following diagrams show the front panels of the standard and VC versions of all MLC 52 models.

NOTE: The front panel buttons are prelabeled for convenience. You can relabel them using the other labels that are provided. See "**Replacing Button Labels**" in the "Installation and Configuration" section for the relabeling procedure.

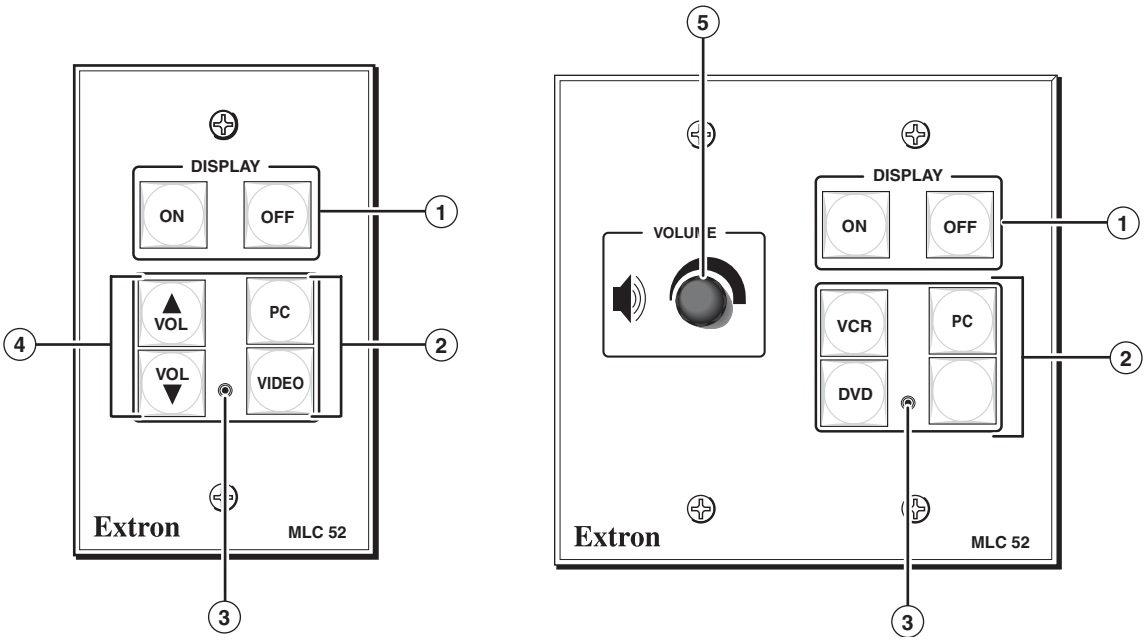

MLC 52 IR and RS

MLC 52 IR and RS VC

Figure 24. MLC 52 and MLC 52 VC Front Panels

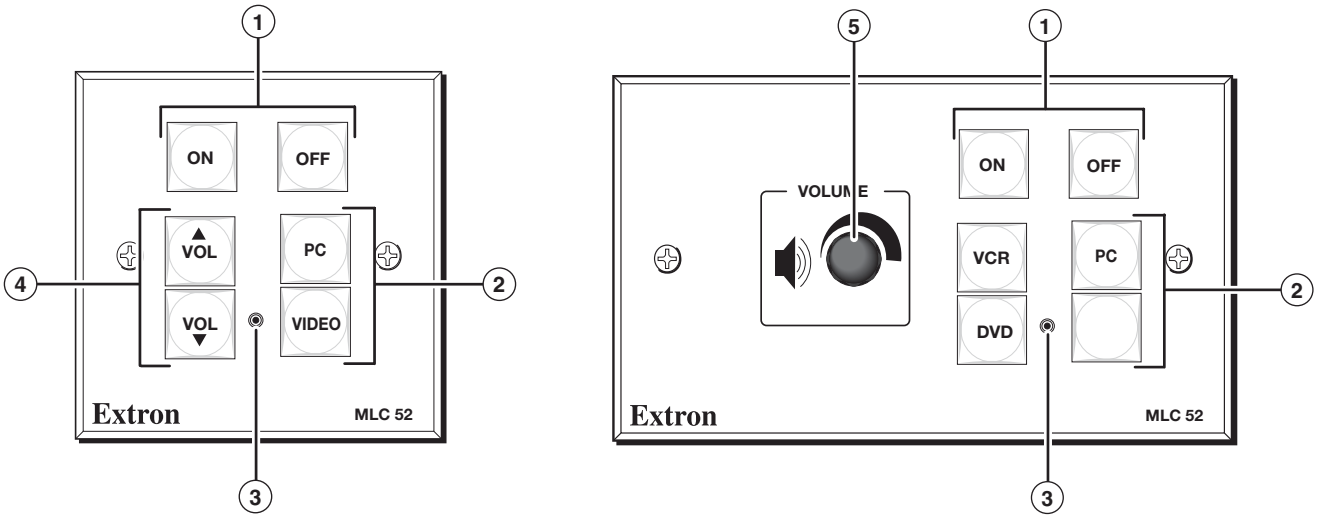

MLC 52 RS MK

MLC 52 RS MK VC

Figure 25. MLC 52 RS MK and MLC 52 RS MK VC Front Panels

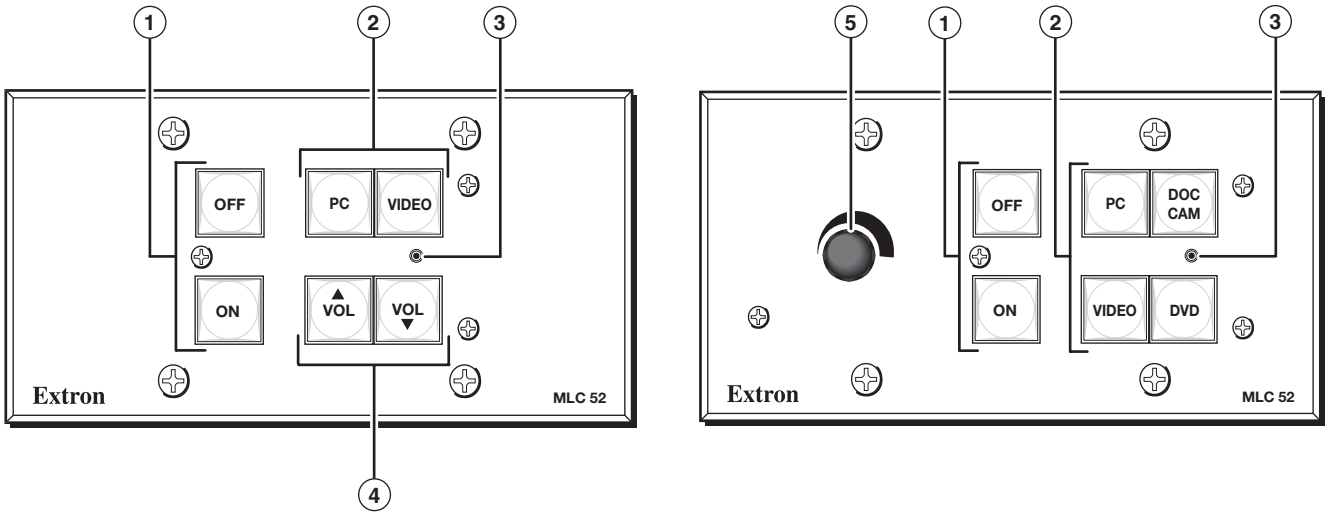

MLC 52 RS EU

MLC 52 RS EU VC

Figure 26. MLC 52 RS EU and MLC 52 RS EU VC Front Panels

① **Display power buttons** — The display power buttons turn power to the projector or display on and off. Because the display device can be only on or off at a given time, these buttons are programmed in an exclusive switch group. (A 2-second hold requirement can be enabled or disabled via the configuration software; see the configuration program help file for the procedure.)

② **Input selection buttons** — These buttons are preprogrammed to select input sources. By default, they are in input mode; that is, only one of them can be selected at a time. If you want these buttons to operate independently of each other, use the MLC 52 configuration software to remove the group configuration from them.

③ **Configuration port** — Connect this port to your computer RS-232 port to configure and communicate with the MLC. Through this port, the MLC receives commands issued via the configuration software on your computer.

Use a 2.5 mm TRS to 9-pin D-sub connector cable to connect the MLC to your PC via this 2.5 mm female TRS connector.

NOTE: This cable is an optional accessory that can be ordered from Extron (part number 70-335-01).

The protocol for this configuration port is as follows:

- 9600 baud
- 8 data bits
- 1 stop bit
- No parity

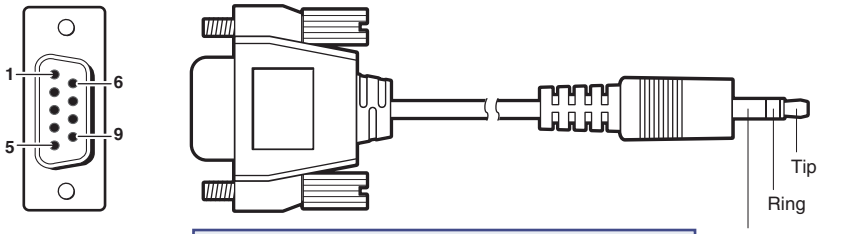

9-pin D	Connection	TRS Plug
Pin 2	Computer Rx line	Tip
Pin 3	Computer Tx line	Ring
Pin 5	Computer signal ground	Sleeve

Figure 27. 2.5 mm TRS Cable for the Configuration Port

See the MLC 52/DVCM 50 Configuration Program help file for details about using the software to set up the system.

④ **Volume adjustment buttons** — (Standard MLC 52 models only) These two buttons are used to adjust the volume of the projector or display up and down.

If your A/V system does not require the volume up and down function (for example, if the MLC is configured with the VC faceplate containing the volume control knob), you can reprogram these buttons for input selection or additional display device functions (see the MLC 52 configuration program help file for reprogramming instructions).

⑤ **Volume control knob** — (MLC 52 VC models only) The volume control knob on the VC models enables you to adjust the volume of the display device via an Extron device such as an MPA series power amplifier, an MP series preamplifier, or a PoleVault PVS switcher.

NOTE: Use only Extron devices with this port.

Powering the Display Device On and Off

The display power On and Off buttons on the MLC 52 front panel are used to turn the projector or other display device on and off.

Powering On

Press and release the MLC 52 On button to power on the display device. The On button blinks for 4 seconds, then remains steadily lit.

Powering Off

To turn the projector or display off, press the Off button. The button blinks for 4 seconds, then remains off.

NOTE: A 2-second hold feature, requiring you to press and hold the Off button for 2 seconds in order to turn off the display device, helps prevent accidental powering off of the projector or display. This feature can be disabled and enabled through the configuration software. See the MLC 52 Configuration Program help file for further information.

Selecting Inputs

The four buttons below the On and Off buttons on the front panel can be configured to select inputs on the display device. The PC and Video buttons have been preconfigured to select inputs — a desktop or laptop computer (PC); a VCR or DVD (Video).

Using IR learning, IR data transfer, or the MLC 52 configuration software, you can reconfigure these buttons and add commands to them to select other inputs if desired. The two volume (Vol) buttons on the standard MLC can be configured to select inputs as well, if you do not need them to control projector or display volume. Up to four commands can be programmed on any button. See the MLC 52 Configuration Program help file for information on configuring MLC buttons.

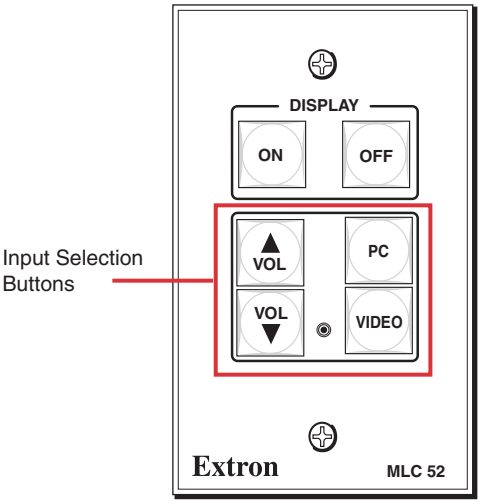

Figure 28. Input Selection Buttons on the MLC 52 Front Panel

To select an input, press and release the appropriate input selection button. The command that was programmed in the first memory block of the button is executed.

- All buttons are lit at 25% intensity while the MLC receives power. A selected (active) input button lights more brightly than the other buttons.
- If there is more than one input selection command programmed in the button memory blocks, you can execute the commands in memory blocks 2, 3, and 4 by pressing the button a second, third, and fourth time.

  For example, if you have programmed memory block 1 on the Video button for a VCR, and block 2 for a DVD player, you would press and release the Video button once to select the input to which the VCR is connected on the display, then a second time to select the DVD input. (Pressing it a third time reselects the VCR, and so on.)
- If an input selection button is in macro mode, pressing the button once executes all the commands stored on that button, in memory block order (the command in memory block 1 is performed first, then block 2, and so on). See "**Setting Up Button Macros Using IR**" in the "Installation and Configuration" section.

Operating the MLC 52 Using IR Remote Control

The optional hand-held IR 452 remote control sends infrared signals to an MLC 52 via an optional IR Link or IRL 20. In conjunction with the MLC 52, it can be used to operate your projector, display, and input devices. The remote control is configured with commands for a variety of device functions (for example, VCR On, VCR Off, Stop, and Pause). These commands can be programmed onto the MLC buttons only via the configuration software. (See the configuration program help file.)

NOTES: The IR 452 cannot perform the volume knob function on the MLC 52 IR VC or the MLC 52 RS VC. All other functions on the IR 452 are available on the MLC 52 VC models.

Setup operations cannot be performed from the IR 452 remote control.

The IR 452 remote control requires the optional IR Link or IRL 20 in order to send commands to the MLC, which in turn issues the commands to the input or output devices.

1. Wire the IR Link or IRL 20 to the MLC 52 and mount it. (See "**Wiring an IR Link**" or "**Wiring an IRL 20**" in the "Installation and Configuration" section for instructions. See the IR Link or the IRL 20 user guide for mounting instructions.)
2. Using the MLC 52 configuration software, program the desired buttons on the IR 452 with the commands available with the currently loaded driver. (See the MLC 52/DVCM 50 Configuration Program help file for the procedure.)
3. To operate a device using the IR 452 with the MLC, point the remote control directly at the IR Link or IRL 20 signal pickup window.
4. The IR 452 has a range of approximately 30 feet (12 m) within 40 degrees on either side of the axis (see the illustration at right).
5. Press the button for the function you want to perform. The following takes place:
   a. The remote control sends the command programmed to the pressed button via infrared (IR) signal to the IR Link or IRL 20.
   b. The IR Link or IRL 20 sends the command to the MLC through the MLC IR IN port on the control connector, to which the IR Link or IRL 20 is connected.
   c. The MLC recognizes the command it receives via the IR IN port and responds as if its own equivalent button were pressed, issuing the command to the appropriate device.

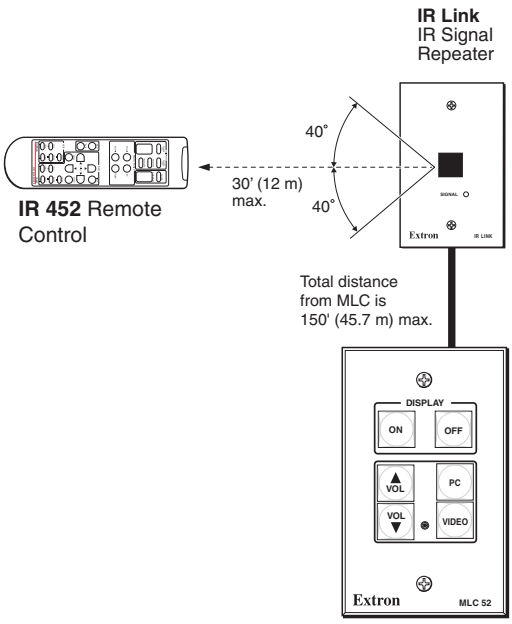

MLC 52 or MLC 52 VC

See "**Wiring an IR Link**" or "**Wiring an IRL 20**" in "Installation and Configuration," for information on connecting these products to the MLC.

Buttons on the IR 452 Remote Control

The buttons on the optional IR 452 Remote Control duplicate the MLC 52 front panel controls for normal operation. The MLC responds to commands from the IR 452 as if the corresponding button were pressed on the controller.

The IR 452 Display Power On and Power Off buttons and the VCR and DVD control buttons cannot control a device through the MLC until commands have been stored in the MLC memory. The IR 452 VCR buttons control the first (lowest address numbered) VCR connected to the MLC, while the DVD buttons control the first (lowest address numbered) DVD connected to the MLC.

Commands are transmitted from the MLC control connector (via hard wiring) and IR ports (via IR emitters) when the corresponding button is pressed on the IR 452 or on the controller front panel.

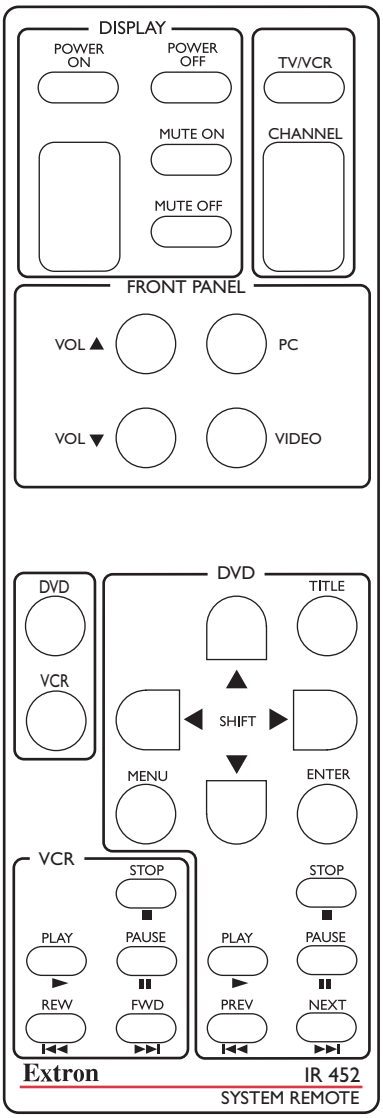

Resetting

In the event that the MLC 52 needs to be reset, you can do so by one of the following methods:

- **Factory firmware reset** — Press and hold the bottom right button (the Video button on standard models or the blank button on VC models) while applying power to the MLC. This method resets the MLC firmware to the version with which the unit was delivered from the factory. Any codes that you previously programmed for the buttons remain in effect.
- **Factory configuration reset** — Press and hold the On and Off buttons simultaneously while applying power to the MLC. This method removes all codes from the buttons.

You can also reset the MLC to its factory defaults via the MLC 52 configuration software. See the MLC 52 configuration program help file for more information.

Locking the Front Panel (Executive Mode)

To prevent access by unauthorized users, or accidental presses of the button issuing unwanted commands to devices, the front panel controls can be locked using executive mode. When the MLC 52 is in executive mode, all front panel functions are locked, so that pressing the buttons has no effect.

If a button is pressed while the MLC 52 is in executive mode, all the front panel buttons blink, indicating that the front panel is locked.

To place the MLC in executive mode:

1. Power off the display device. Executive mode cannot be enabled if the device is on.
2. On the standard MLC 52 models, press and hold the Vol ▲ and Video buttons simultaneously for 5 seconds.

   On the VC models, press and hold the unlabeled button (bottom right) and the VCR button simultaneously for 5 seconds.

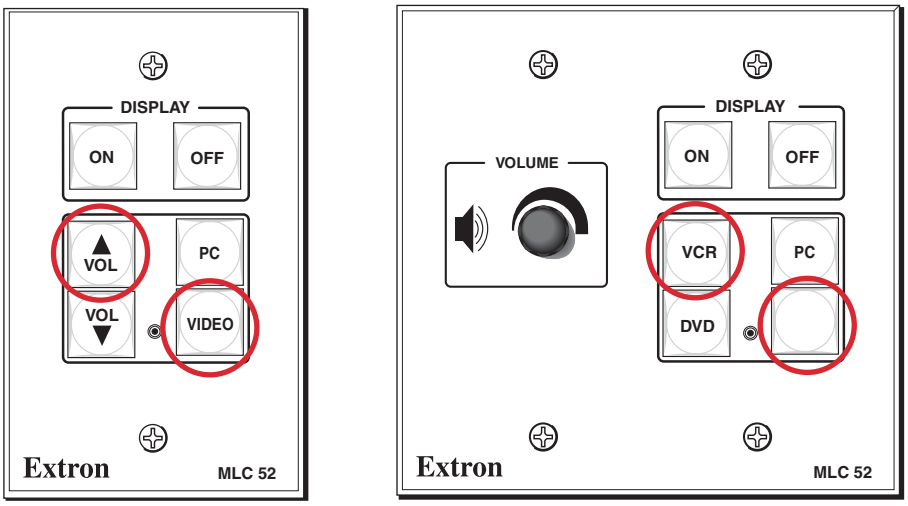

Figure 29. Buttons to Press and Hold for Executive Mode

When the MLC enters executive mode, all front panel buttons flash three times, then return to their original state.

To exit executive mode, press the same two buttons again, holding them for 5 seconds.

Special Applications

This section describes some special types of applications that represent unique conditions. For the MLC 52 to operate properly in these situations, it is important that the controller be configured correctly. On the following pages, three application examples are described, along with their requirements for the MLC 52.

- **Application 1: Using Multiple Sources with an MLC 52**
- **Application 2: Controlling Projectors that Require Power Off Confirmation**
- **Application 3: Controlling Projectors that Have Multi-coded IR Functionality**

Application 1: Using Multiple Sources with an MLC 52

Following is an example of an application in which the system contains more than two inputs. This system has two PC inputs (a laptop and a desktop) and two video inputs (a VCR and a DVD).

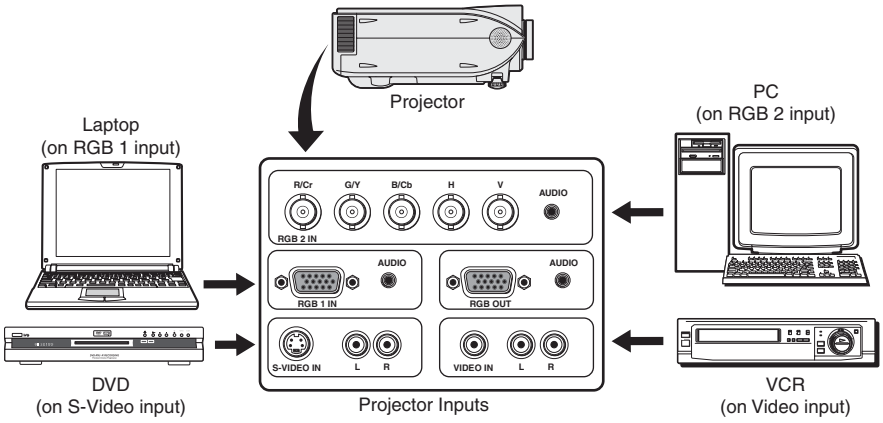

Figure 30. Application 1: Projector with More Than Two Inputs

For best results, choose a projector that has dedicated audio and video input connectors for each PC and each video source. Do not use a projector on which multiple video inputs share one audio input.

The MLC 52 is configured differently depending on the type of projector remote control that will be used, and on whether the MLC will use IR or RS-232 projector control. Because each button on the MLC 52 can store up to four commands per button, the PC and Video buttons should be programmed as shown in the illustrations on the following pages.

- **IR control:** If the projector will be controlled by the MLC 52 using IR, its IR remote control has one of the following types of button configurations for video selection:
  - **Projector remote control type A:** A different remote control button is used for each video input source. Each button selects the input source with the signal type that matches the button label (for example, the RGB1 button might select the laptop computer; RGB2, the desktop PC.)
  - **Projector remote control type B:** One remote control button is used for all video formats (RGB, S-video, and/or composite video). This type of button must be pressed repeatedly to toggle through all the inputs with the same format.
- **RS-232 control:** If the projector is to be controlled by the MLC 52 RS via RS-232 commands, the projector typically has a discrete (specific) command for selecting a particular video input. That is, the projector does not have an RS-232 command to toggle through its video inputs.

Programming Buttons for an IR Controlled System

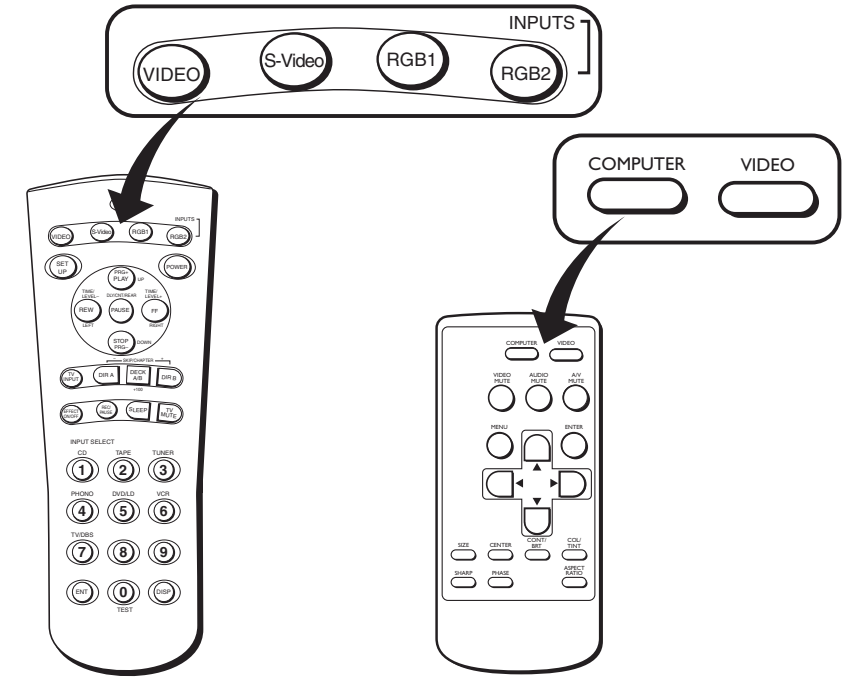

Figure 31. Examples of Projector Remote Control Types A and B

The illustrations on the following pages show the commands to program to the memory slots on the MLC input selection buttons from the two types of projector remote controls, when the projector is controlled via IR. Determine which of these two types most resembles the hand-held remote control of your projector, then select the appropriate instruction set from the following sections to program IR commands to your MLC 52.

Projector remote control type A (application 1)

This remote control has a discrete button for each input. Two buttons are designated for RGB inputs, one for S-video, and one for video (composite).

- Use IR learning to program the command from each of the projector remote control RGB input selection buttons onto the MLC PC button.
- Use IR learning to program the commands from the projector remote control Video and S-video buttons onto the MLC Video or blank (VC models) button.

(See "**Configuring Using IR Learning**" in the "Installation and Configuration" section for the IR learning procedure.)

The MLC now has two commands each on the PC and Video or blank (VC models) buttons. This enables you to switch between the two PC inputs by repeatedly pressing the PC button, and between the two composite/S-video inputs by repeatedly pressing the Video or blank button.

Standard MLC 52 with type A remote control

If you are using a standard (non-VC) MLC 52 IR or an MLC 52 RS with a type A remote control, program the buttons using the following scheme:

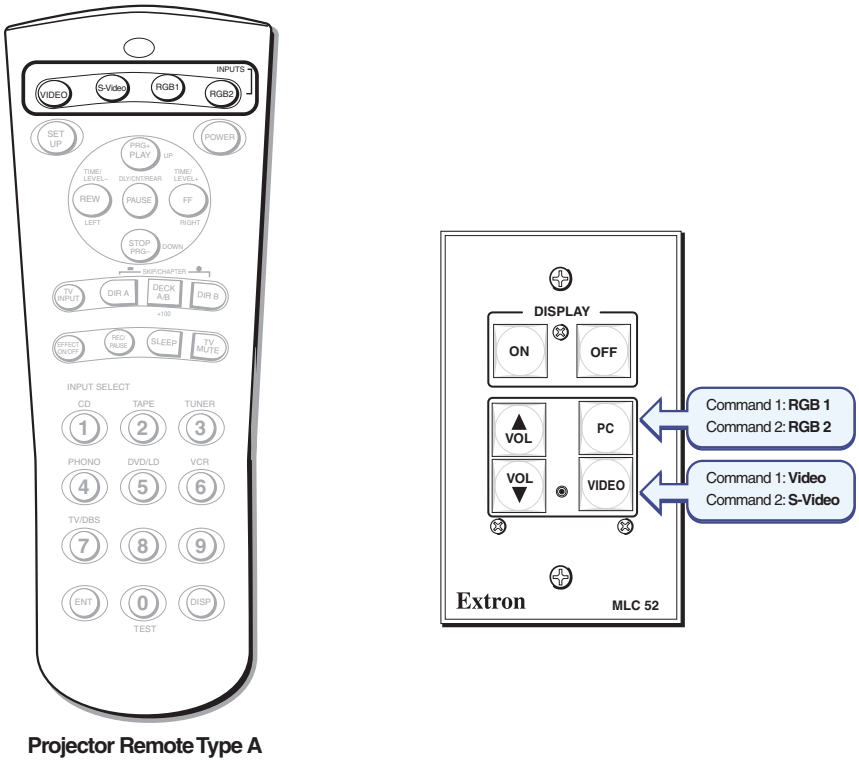

Projector Remote Type A

Figure 32. Programming MLC 52 Input Selection Buttons from a Projector Remote Control Type A

MLC 52 VC models with type A remote control

If you are using an MLC 52 IR VC or an MLC 52 RS VC model with a type A remote control, program the buttons using the following scheme:

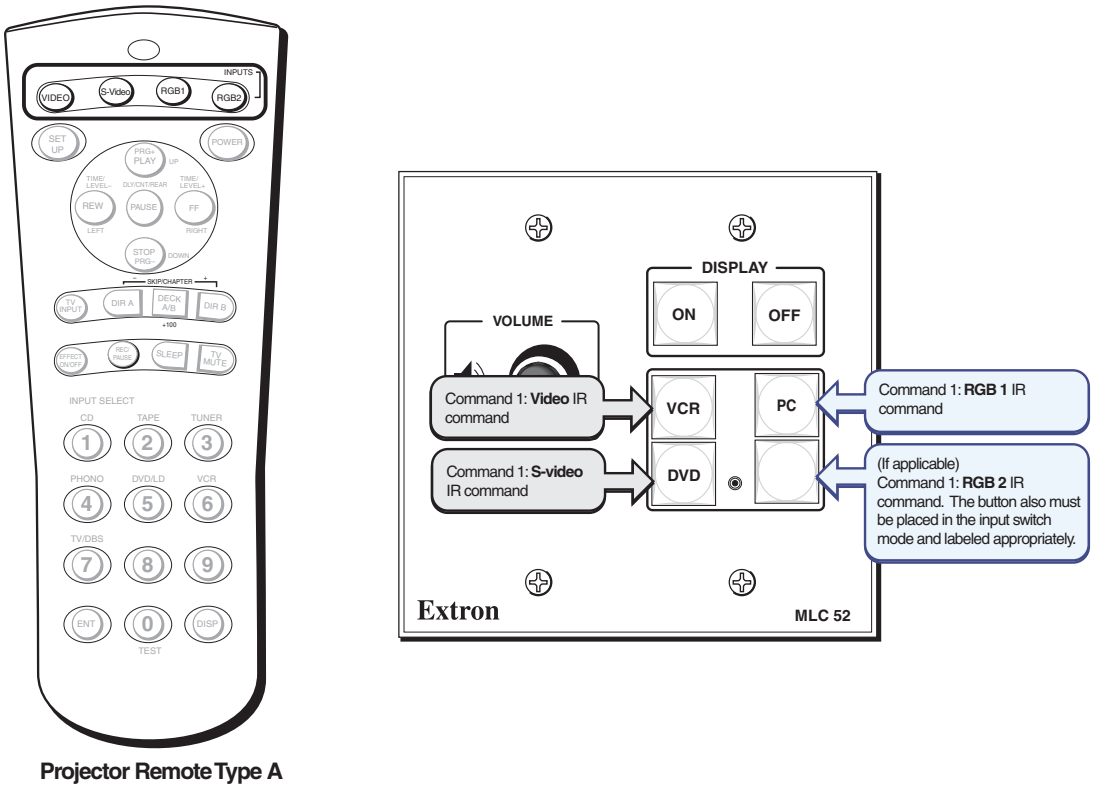

Figure 33. Programming the MLC 52 IR VC and MLC 52 RS VC with a Projector Remote Control Type A

Projector remote control type B (application 1)

This remote control has only two input buttons — one for the RGB inputs and one for the S-video and composite video inputs. Each of these buttons contains one command that causes the projector to toggle between inputs.

- Program the command from the Computer or RGB button of the projector remote control onto the PC button of the MLC.
- Program the command that is on the Video button of the projector remote control onto the Video button of the MLC.

The MLC now has one command each on its PC and Video buttons. You must still repeatedly press an input button to switch between selected sources; however, the button actually contains only one command (a projector input toggle command).

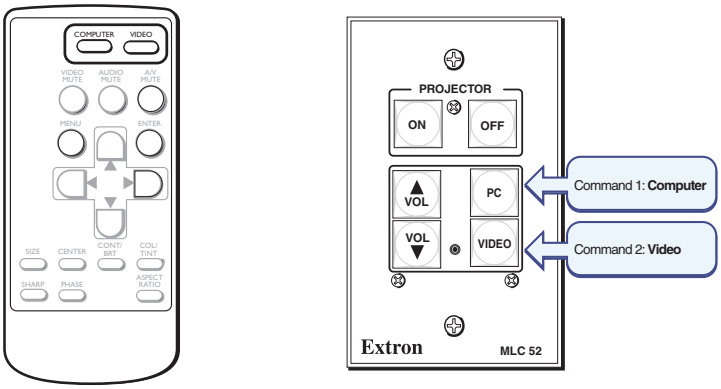

Projector Remote Control Type B

Figure 34. Programming MLC 52 Input Selection Buttons from a Projector Remote Control Type B

If you are using an MLC 52 IR VC or an MLC 52 RS VC with a type B remote control, program the buttons using the following scheme:

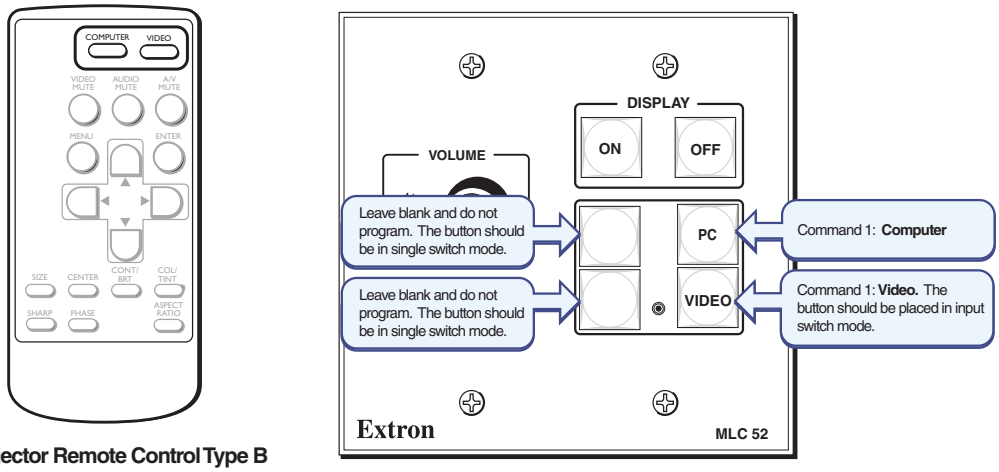

Projector Remote Control Type B

Figure 35. Programming MLC 52 IR VC and MLC 52 RS VC with a Projector Remote Control Type B

Programming buttons for multiple inputs on an RS-232 controlled system

If the MLC 52 RS will control the projector via RS-232, the projector remote control does not need to be involved. Program the MLC buttons directly via the front panel configuration port using the configuration software (see the configuration program help file for instructions on programming RS-232 commands to MLC buttons).

1. Program commands 1 and 2 on the PC and Video buttons with the projector RS-232 command for discrete input selection.
2. The MLC now has two commands each on the PC and Video buttons. Press these buttons repeatedly to switch between the two input selection commands that you entered on each button.

Application 2: Controlling Projectors that Require Power Off Confirmation

Some projectors controlled via IR require the Power Off button on the hand-held remote control to be pressed twice to turn off the projector. These projectors usually present a prompt (similar to the one shown below) on the image, instructing you to press the Power Off button again to confirm your intent to power off the projector. (If the projector is controlled via RS-232, this prompt is usually not displayed.)

Figure 36. Typical Projector Power Off Confirmation Prompt

Configuring the MLC 52 for a power-off confirmation

The MLC 52 can be configured so that the projector Power Off button does not need to be pressed twice for confirmation. Using the macro mode feature, you can send two power off commands sequentially from a single press of the MLC Off button.

To configure the MLC Off button to issue both a power off and a power off confirmation command:

1. Ensure that power is applied to the MLC 52.
2. Set configuration DIP switch 1 on the rear panel to On (up).
3. Program the first two command memory blocks (commands 1 and2) on the MLC Off button with a projector off command. See "**Configuring Using IR Learning**" in the "Installation and Configuration" section for procedures.

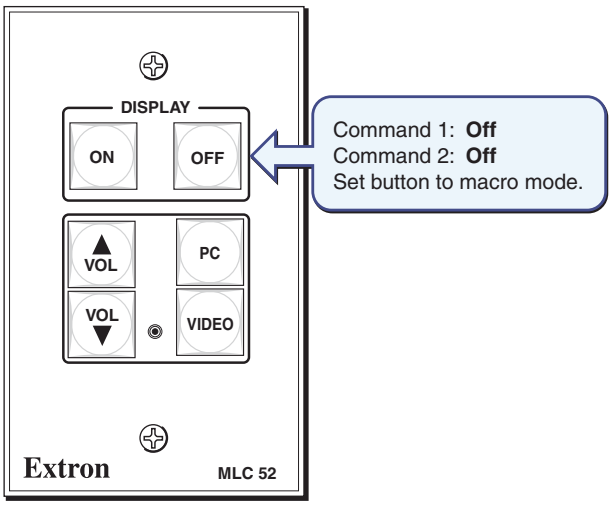

Figure 37. Programming the Off Button for a Projector that Requires a Confirmation

4. Put the MLC Off button that you have just programmed into macro mode by pressing and holding the button for 3 seconds. The orange LED on the back panel, labeled "E," flashes rapidly five times, then turns off, indicating that the button is now configured for macro mode.
5. Set configuration DIP switch 1 on the MLC rear panel to Off (down).

Now, with one press of the MLC Off button, you can issue the command to projector off and respond to the projector confirmation prompt. The commands are issued in succession at 1.5-second intervals.

Application 3: Controlling Projectors that have Multi-coded IR Functionality

Certain projectors, such as Philips projectors, have multiple IR codes for the same function. Projectors with multi-coded IR functionality issue two commands for each IR remote control button. Command "A" is initiated by the first press of the button; command "B" is initiated by the second press. Because the buttons on the MLC 52 can store up to four commands, it is ideal for projectors of this type.

If controlled via RS-232, projectors that have multi-coded IR functions typically have a specific RS-232 command that selects or performs each desired function. Therefore, there is no command "A" or "B" for RS-232 control.

Configuring the MLC 52 for Multi-coded IR Functionality

This section provides instructions for using IR learning to program multiple input selection commands onto the MLC 52 buttons from two common types of hand-held projector remote controls that have multi-coded IR functionality.

NOTE: For best results, select a projector that has a dedicated audio and video input for each source used in the system. Video and audio should not share an input.

Projector remote control type A (application 3)

This remote control has a discrete button for each input. Two buttons are designated for RGB inputs, one for S-video, and one for video (composite). Each of these input selection buttons on the type A remote control has a command "A" and "B" coded on it. Follow these steps to use IR learning to program the input selection commands from the projector type A hand-held remote control onto the MLC PC and Video buttons.

NOTE: When a command has been successfully learned, the IR learning LEDs on the MLC rear panel flash in rapid progression from top to bottom, then back to the top.

Programming RGB inputs — projector remote control type A

1. Place the rear panel configuration DIP switch 1 in the On (up) position to enable learning mode.
2. Using IR learning, program command "A" from the RGB 1 input selection button on the projector remote control into memory block 1 of the MLC PC button:
   a. Press the PC button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the bottom IR learning LED should be flashing.
   b. Within 5 seconds (while the PC button on the MLC 52 is blinking), press the RGB 1 button on the projector remote control. The MLC has learned command "A" for RGB 1.
3. Program the input selection command "A" from the RGB 2 input selection button on the projector remote control into memory block 2 of the MLC 52 PC button:
   a. Press the PC button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the second LED from the bottom flashes.
   b. Within 5 seconds (while the PC button on the MLC 52 is blinking), press the RGB 2 button on the projector remote control. The MLC has learned command "A" for RGB 2.
4. Program the input selection command "B" from the RGB 1 input selection button on the projector remote control into memory block 3 of the MLC 52 PC button:
   a. Press the PC button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the third LED from the bottom flashes.
   b. Within 5 seconds (while the PC button on the MLC 52 is blinking), press the RGB 1 button on the projector remote control. The MLC has learned command "B" for RGB 1.
5. Program the input selection command "B" from the RGB 2 input selection button on the projector remote control into memory block 4 of the MLC 52 PC button:
   a. Press the PC button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the fourth LED from the bottom flashes.
   b. Within 5 seconds (while the PC button on the MLC 52 is blinking), press the RGB 2 button on the projector remote control. The MLC has learned command "B" for RGB 2.

6. If finished programming the MLC 52 buttons, return configuration DIP switch 1 to its Off (down) position, and test the system.

   If you want to program video input selection at this time, proceed to "**Programming video inputs — projector remote control type A**" on the next page.

Programming video inputs — projector remote control type A

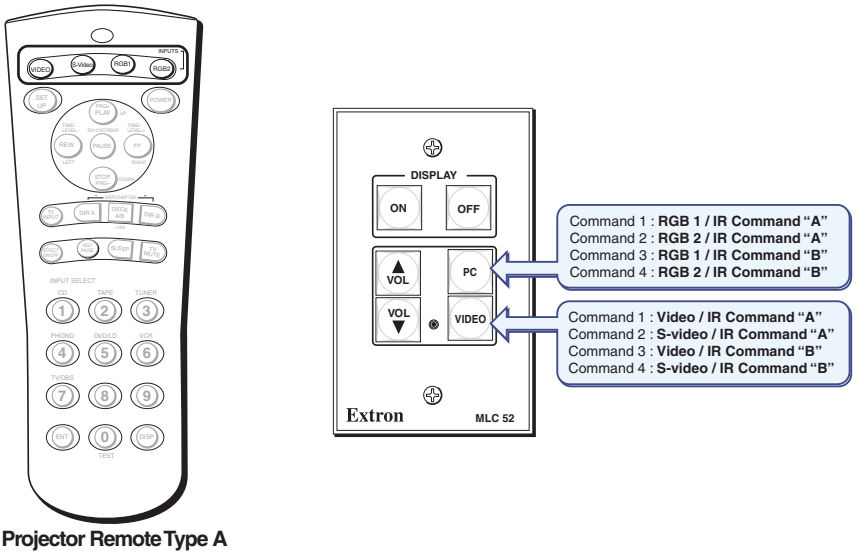
DISPLAY
ON
OFF
VOL
PC
VOL
VIDEO
Extron
MLC 52
Command 1 : RGB 1 / IR Command "A"
Command 2 : RGB 2 / IR Command "A"
Command 3 : RGB 1 / IR Command "B"
Command 4 : RGB 2 / IR Command "B"
Command 1 : Video / IR Command "A"
Command 2 : S-video / IR Command "A"
Command 3 : Video / IR Command "B"
Command 4 : S-video / IR Command "B"
Projector Remote Type A

Figure 38. Programming MLC 52 Input Selection Buttons from a Projector Remote Control Type A

1. Place the rear panel configuration DIP switch 1 in the On (up) position to enter learning mode. (If the MLC is already in learning mode, proceed to step **2**.)

2. Using IR learning, program command "A" from the Video input selection button on the projector remote control into memory block 1 of the MLC 52 Video button as follows:

   a. Press the Video button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the bottom IR learning LED flashes.

   b. Within 5 seconds (while the Video button on the MLC 52 is blinking), press the Video button on the projector remote control. The MLC has learned command "A" for video.

3. Program the input selection command "A" from the S-video input selection button on the projector remote control into memory block 2 of the MLC 52 Video button as follows:

   a. Press the Video button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the second LED from the bottom flashes.

   b. Within 5 seconds (while the Video or blank button on the MLC 52 is blinking), press the S-video button on the projector remote control. The MLC has learned command "A" for S-video.

4. Program the input selection command "B" from the Video input selection button on the projector remote control into memory block 3 of the MLC 52 Video button as follows:

   a. Press the Video button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the third LED from the bottom flashes.

   b. Within 5 seconds (while the Video or blank button on the MLC 52 is blinking), press the Video button on the projector remote control. The MLC has learned command "B" for Video.

5. Program the input selection command "B" from the S-video input selection button on the projector remote control into memory block 4 of the MLC 52 Video button as follows:

   a. Press the Video button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the fourth LED from the bottom flashes.

   b. Within 5 seconds (while the Video or blank button on the MLC 52 is blinking), press the S-video button on the projector remote control. The MLC has learned command "B" for S-video.

6. When finished programming the MLC 52 buttons, return configuration switch 1 to its Off (down) position.

7. Test the system.

Issuing input selection commands learned from a type A remote control

The MLC now has four commands each on the PC and Video buttons. When you press an MLC input button repeatedly, the following occurs:

Using the PC button (RGB):

- **First press (memory block 1):** The MLC 52 issues command "A" for RGB 1 input selection. The projector switches to its RGB 1 input.
- **Second press (memory block 2):** The MLC 52 issues command "A" for RGB 2 input selection. The projector switches to its RGB 2 input.
- **Third press (memory block 3):** The MLC 52 issues command "B" for RGB 1 input selection. The projector switches to its RGB 1 input.
- **Fourth press (memory block 4):** The MLC 52 issues command "B" for RGB 2 input selection. The projector switches to its RGB 2 input.

Using the Video button (S-video or composite video):

- **First press (memory block #1):** The MLC 52 issues command "A" for composite video input selection. The projector switches to its video input.
- **Second press (memory block 2):** The MLC 52 issues command "A" for S-video input selection. The projector switches to its S-video input.
- **First press (memory block 1):** The MLC 52 issues command "B" for composite video input selection. The projector switches to its video input.
- **Second press (memory block 2):** The MLC 52 issues command "B" for S-video input selection. The projector switches to its S-video input.

Programming VC models — projector remote control type A

If you are using an MLC 52 IR VC or an MLC 52 RS VC with a type A remote control, program the buttons as indicated in the illustration below.

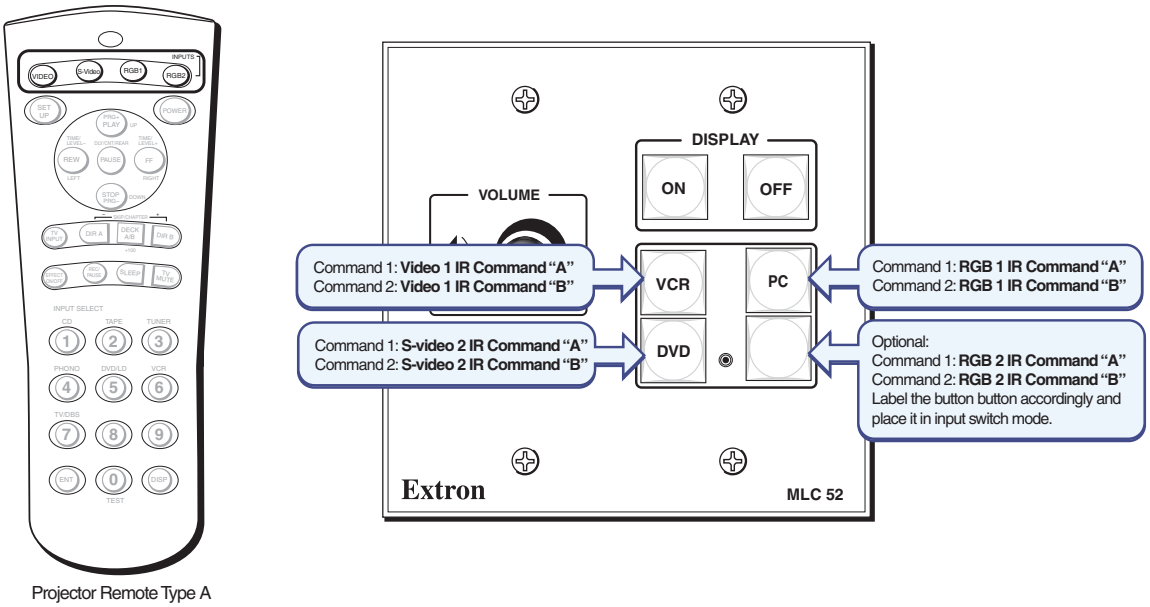
Projector Remote Type A
DISPLAY
ON
OFF
VOLUME
Command 1: Video 1 IR Command "A"
Command 2: Video 1 IR Command "B"
VCR
PC
Command 1: RGB 1 IR Command "A"
Command 2: RGB 1 IR Command "B"
Command 1: S-video 2 IR Command "A"
Command 2: S-video 2 IR Command "B"
DVD
Optional:
Command 1: RGB 2 IR Command "A"
Command 2: RGB 2 IR Command "B"
Label the button button accordingly and place it in input switch mode.
Extron
MLC 52

Figure 39. Programming an MLC 52 VC Model with a Projector Remote Control Type A

Projector remote control type B (application 3)

This remote control has only two input buttons: one for the RGB inputs and one for the S-video and composite video inputs. Each of these buttons contains two commands ("A" and "B") that cause the button to toggle between inputs.

Following these steps, use IR learning to program the input selection commands from the projector type B hand-held remote control onto the MLC PC and Video or blank (VC models) buttons.

Programming RGB inputs — projector remote control type B

1. Place the rear panel configuration DIP switch 1 in the On (up) position to enter learning mode.
2. Using IR learning, program command "A" from the RGB input selection button on the projector remote control into memory block 1 of the MLC 52 PC button as follows:
   a. Press the PC button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the bottom IR Learning LED flashes.
   b. Within 5 seconds (while the PC button on the MLC 52 is blinking), press the RGB button on the projector remote control. The MLC has learned command "A" for RGB.

3. Program the input selection command "B" from the RGB input selection button on the projector remote control into memory block 2 of the MLC 52 PC button as follows:

   a. Press the PC button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the second LED from the bottom flashes.

   b. Within 5 seconds (while the PC button on the MLC 52 is blinking), press the RGB button on the projector remote control. The MLC has learned command "B" for RGB.

4. If finished programming the MLC 52 buttons, return configuration DIP switch 1 to its Off (down) position, and test the system.

   If you want to program video input selection at this time, proceed to "**Programming video inputs — projector remote control type B**," below.

Programming video inputs — projector remote control type B

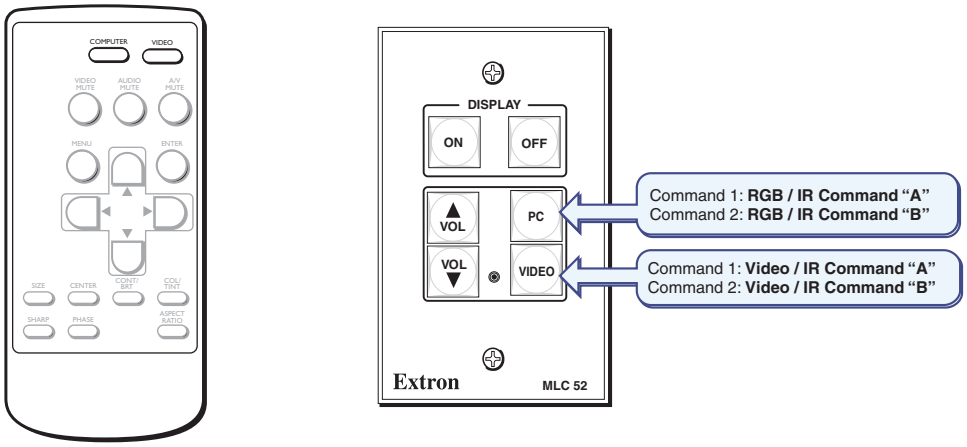

Projector Remote Type B

Figure 40. Programming MLC 52 Input Selection Buttons from a Projector Remote Control Type B

1. Place the rear panel configuration DIP switch 1 in the On (up) position to enable learning mode. (If the MLC is already in learning mode, proceed to step **2**.)

2. Using IR learning, program command "A" from the Video input selection button on the projector remote control into memory block 1 of the MLC 52 Video or blank (for VC models) button as follows:

   a. Press the Video button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the bottom IR learning LED flashes.

   b. Within 5 seconds (while the Video button on the MLC 52 is blinking), press the Video button on the projector remote control. The MLC has learned command "A" for Video.

3. Program the input selection command "B" from the Video input selection button on the projector remote control into memory block 2 of the MLC 52 Video button as follows:

   a. Press the Video button on the MLC front panel. The button blinks, indicating that the MLC is ready to learn the command. On the rear panel, the second LED from the bottom flashes.

   b. Within 5 seconds (while the Video or blank button on the MLC 52 is blinking), press the Video button on the projector remote control. The MLC has learned command "B" for Video.

4. When finished programming the MLC 52 buttons, return configuration DIP switch 1 to its Off (down) position.

5. Test the system.

Issuing input selection commands learned from remote control type B

The MLC now has two commands each on the PC and Video buttons. When you press an MLC input button repeatedly, the following commands are issued:

Using the PC button (RGB):

- **First press (memory block 1):** The MLC 52 issues command "A" for RGB input selection.
- **Second press (memory block 2):** The MLC 52 issues command "B" for RGB input selection.

Using the Video button (S-video or composite video):

- **First press (memory block 1):** The MLC 52 issues command "A" for composite video input selection.
- **Second press (memory block 2):** The MLC 52 issues command "B" for S-video input selection.

Programming VC models — Projector remote control type B

If you are using a type B remote control with an MLC 52 IR VC or an MLC 52 RS VC, configure the buttons according to the diagram below.

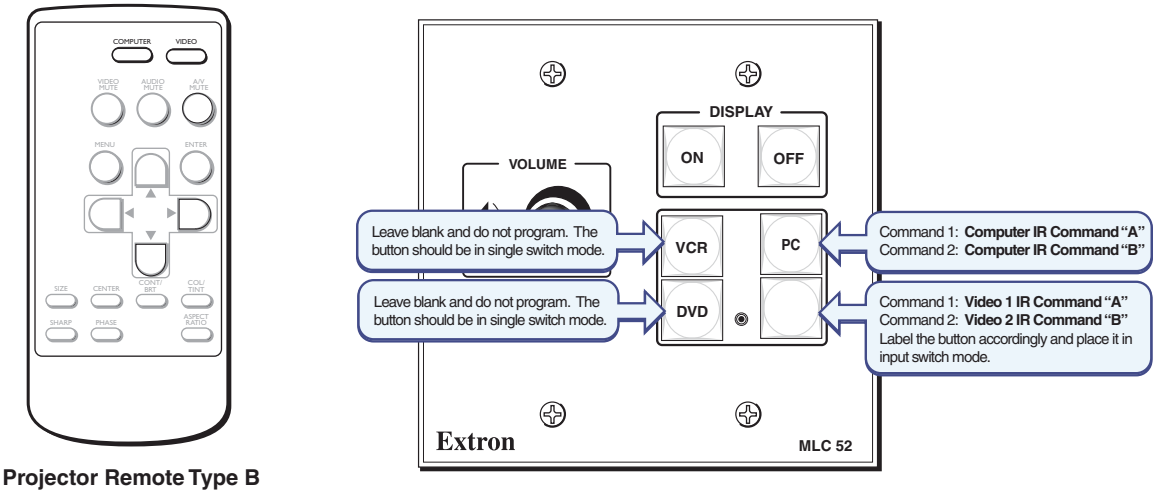
COMPUTER
VIDEO
Projector Remote Type B
DISPLAY
ON
OFF
VOLUME
Leave blank and do not program. The button should be in single switch mode.
VCR
PC
Command 1: Computer IR Command "A"
Command 2: Computer IR Command "B"
Leave blank and do not program. The button should be in single switch mode.
DVD
Command 1: Video 1 IR Command "A"
Command 2: Video 2 IR Command "B"
Label the button accordingly and place it in input switch mode.
Extron
MLC 52

Figure 41. Programming an MLC 52 VC Model with a Projector Remote Control Type B

Serial Communication

This section describes the procedure for accessing and starting the MLC 52/DVCM 50 Configuration Program and also contains a list and explanations of the Simple Instruction Set (SIS™) commands available for the MLC 52. The following topics are covered:

- **Configuration Ports**
- **Using the MLC 52 Configuration Program**
- **Using SIS Commands**

Configuration Ports

The MLC 52 can be remotely configured via a host computer connected to the front panel configuration port (see "**Front Panel Components**" in the "Operation" section) or to pins D and F of the rear panel control connector (see "**Wiring for RS-232 Control [RS Model Only]** in the "Installation and Configuration" section). Through these ports, you can program the MLC buttons with commands by using the configuration software (MLC 52/DVCM 50 Configuration Program). You can also issue certain SIS commands through these ports.

Using the MLC 52 Configuration Program

To perform advanced configuration tasks (such as setting button modes, updating firmware, and adding display device drivers), you must use the included Extron MLC 52/DVCM 50 Configuration Program. Many items in the configuration program are also accessible via front panel controls described under "**Front Panel Features**" in the "Operations" section. See that section for details on features and settings. Some features are available only via this configuration program. The MediaLink help file provides information on settings and on how to use the configuration program itself.

To install and run the MLC 52 configuration software, ensure that your computer meets the following system requirements:

- Microsoft® Windows 2000 or later
- Pentium III or better processor (or compatible)
- 32 MB free hard disk space
- Microsoft Internet Explorer® 4.0 or above
- 4x or higher DVD player
- Minimum 1024 x 768 screen resolution

The configuration software is provided on a DVD, which is packaged with the MLC. The program can also be downloaded from the Extron web site (**www.extron.com**). Install this software on your computer.

Installing the Software from the DVD

To install the MLC 52 configuration software to your computer from the included Extron Software Products DVD:

1. Insert the disc into your computer drive. The DVD should start automatically. If it does not, open your Windows Explorer and double-click **`Launch.exe`** on the DVD drive to start it.
2. On the Extron Software DVD screen, click the **`Software`** button (surrounded by a red box in the illustration below).

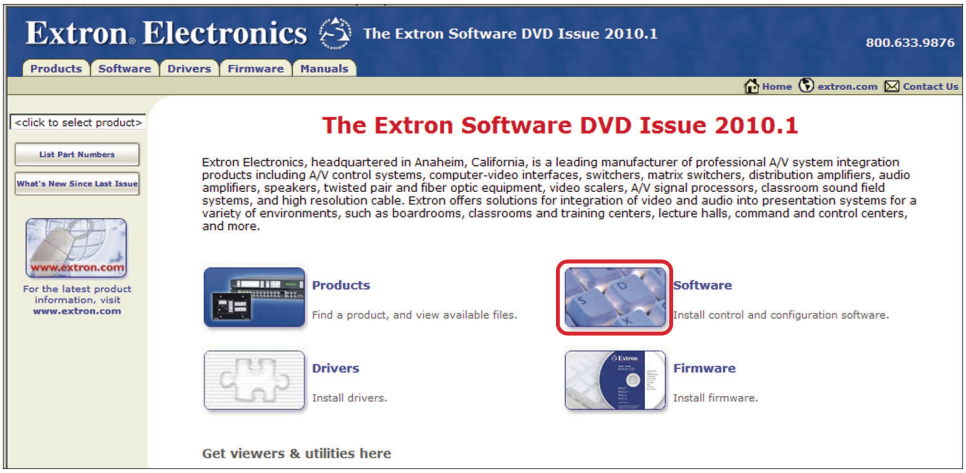
Extron Electronics
The Extron Software DVD Issue 2010.1
800.633.9876
Products
Software
Drivers
Firmware
Manuals
Home
extron.com
Contact Us
<click to select product>
List Part Numbers
What's New Since Last Issue
www.extron.com
For the latest product information, visit www.extron.com
The Extron Software DVD Issue 2010.1
Extron Electronics, headquartered in Anaheim, California, is a leading manufacturer of professional A/V system integration products including A/V control systems, computer-video interfaces, switchers, matrix switchers, distribution amplifiers, audio amplifiers, speakers, twisted pair and fiber optic equipment, video scalers, A/V signal processors, classroom sound field systems, and high resolution cable. Extron offers solutions for integration of video and audio into presentation systems for a variety of environments, such as boardrooms, classrooms and training centers, lecture halls, command and control centers, and more.
Products
Find a product, and view available files.
Software
Install control and configuration software.
Drivers
Install drivers.
Firmware
Install firmware.
Get viewers & utilities here

Figure 42. Extron Software DVD Screen

3. On the Control Software screen, click the **Install** link at the right of the MLC 52 Series line.



Figure 43. Install Link on Software DVD

4. Follow the directions on the subsequent windows to complete the software installation.

Downloading and Installing the Software from the Web

If you do not have the software on DVD, download it to your computer from the Extron web site as follows:

1. Visit the Extron web site at **www.extron.com** and select the **Download** tab.

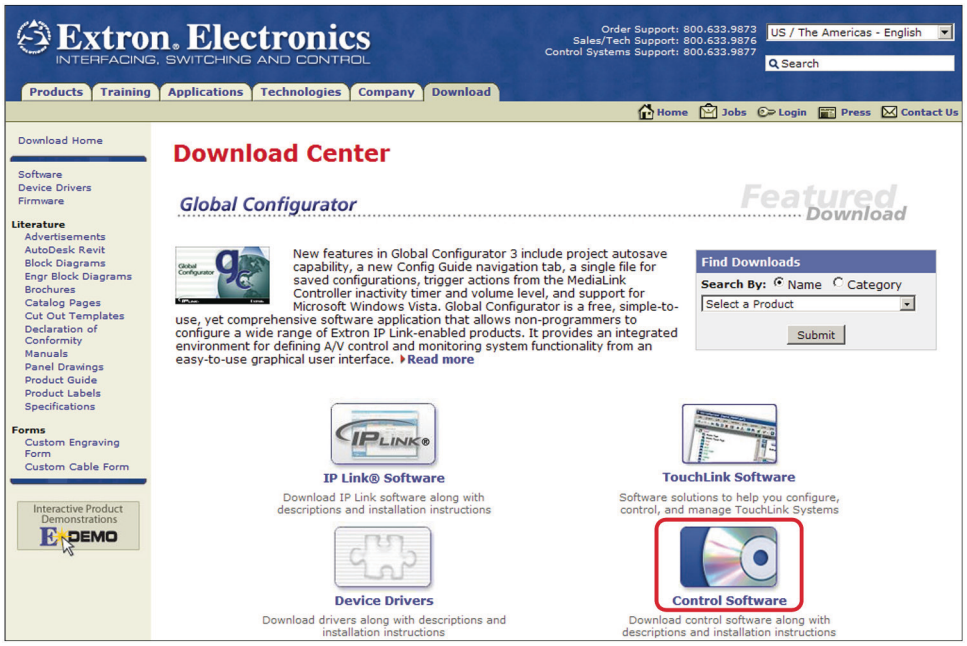

Figure 44. Control Software Button on Download Center Screen

2. On the Download Center screen, click the **Control Software** button. A Control Software screen is displayed, containing a list of control software products.
3. In one of the linked alphabets displayed across the top and bottom of the screen, click **M**.
4. On the "M" software products page, scroll to locate MLC 52, and click the **Download** link at the far right.



Figure 45. Download Link on the Web for the MLC 52 Configuration Software

5. On the next screen, fill in the required information.
6. Click the **Download MLC52SWnxn.exe** button.
7. Follow the instructions on the download screens to download the software and install it on your computer.

By default the installation creates a "MediaLink" folder at the following location on your computer hard drive: C:\Program Files\Extron\MediaLink. The following items are placed in the folder:

- MediaLnk52.exe (MLC 52/DVCM 50 Configuration Program)
- MediaLnk52.hlp (MLC 52 configuration program help file)

Starting the Configuration Program

NOTE: It is not necessary to have an MLC 52 connected and powered up in order to start the configuration program if you start it in emulation mode.

To run the configuration program:

1. On your desktop, click **Start > Extron Electronics > MLC 52 + DVCM 50 > MLC 52 + DVCM 50 Control Program**.
2. On the Connection Window, select one of the two tabs:
   - **`Select a Comm Port`** — This tab lets you establish a connection between your computer and the MLC 52. The MLC must be connected to your computer RS-232 port via either the rear panel captive screw control connector or the front panel 2.5 mm TRS configuration port.

     From the Select a COM Port menu, select the communications port through which your MLC is connected to the computer.

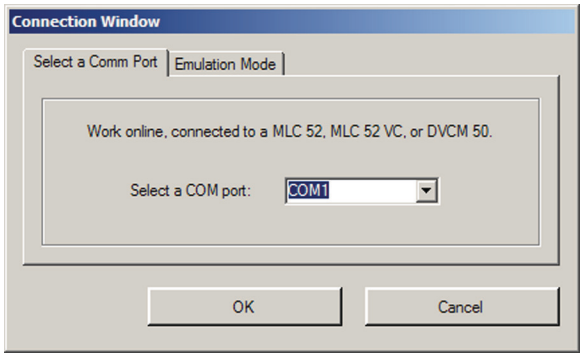

Figure 46. Select a Comm Port Tab

   - **`Emulation Mode`** — This tab lets you open the software whether or not an MLC 52 is attached to the computer.

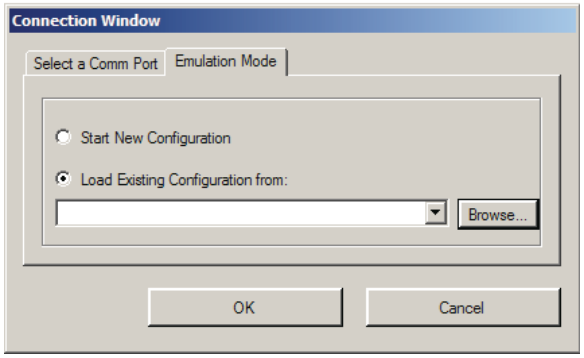

Figure 47. Emulation Mode Tab

3. On the **Select a Comm Port** tab, select a COM port from the drop-down menu,

   or

   On the **Emulation Mode** tab, select one of the following radio buttons:

   - **Start New Configuration** to create a new configuration in emulation mode
   - **Load existing configuration from** to open an existing configuration. If you select this radio button, do the following:

     a. Click the **Browse** button.

     b. In the Import configuration from... window, locate the configuration file that you want to open in Emulation mode (configuration files have a .mlk ending) and double-click on it.

     The path to the selected configuration is displayed in the Browse field on the Connection window.

     See the MLC 52 Configuration Program help file for information on using emulation mode.

4. Click **OK**. The MLC 52 Configuration Program window opens.

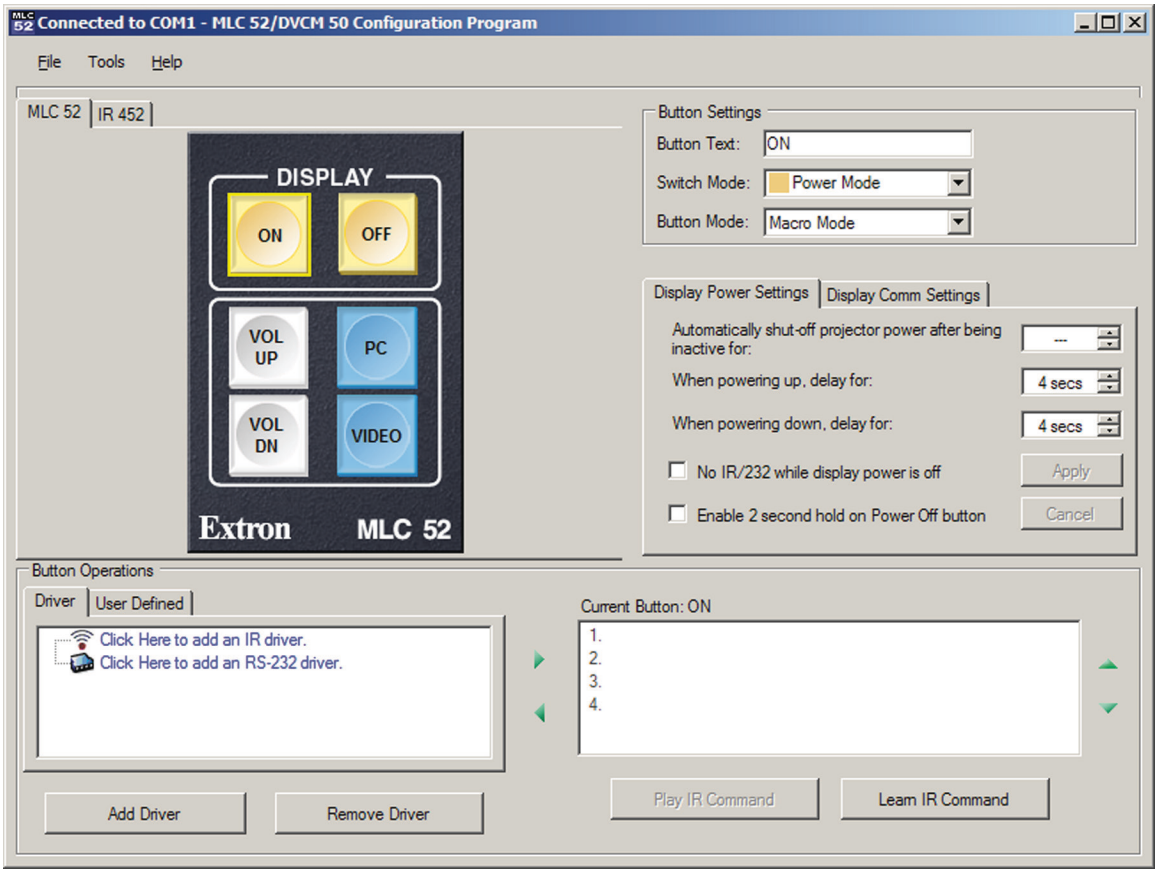

Figure 48. MLC 52 Window

For an explanation of all procedures for creating MLC 52 configurations, see the configuration program help file. To access the help, select **Contents** from the Help menu on the MLC 52 window, or press <F1> and navigate to the relevant section..

Loading Extron Drivers

Extron drivers are control files (libraries) of Extron-created projector or display commands that are specific to a particular display device. There are different sets of drivers for serial (RS-232) and for IR control.

Before you can use the software to configure the MLC buttons, the IR, serial, or both driver packages must be loaded onto your computer. You must then load the driver for your display device to the MLC in order to configure the MLC to control the device.

NOTES: The MLC 52 is compatible with IP Link IR drivers found in the IPL Driver Package, version 6 or higher.

Use preconfigured control files (drivers) whenever possible. If no driver is available for the display that you want to control, it is possible to create your own driver via IR Learning (see "**Configuring Using IR Learning"** in the "Installation and Configuration" section) or using the MLC 52 configuration program (see the configuration program help file).

CAUTION: Loading a new driver causes the existing configuration on the MLC to be overwritten. If you know that you will want to use the previous configuration again, be sure to save it when the screen prompts you.

Loading the serial (RS-232) drivers

When you install your MLC 52 configuration software, the installation program loads the Extron serial drivers onto your computer at the following location, unless you specify otherwise:

By default, the drivers that you download are stored in the Driver2 folder on your computer at:

- **Windows XP** — `C:\Documents and Settings\All Users\Shared Documents\Extron\ Driver2`
- **Windows 7 and Vista** — `C:\Users\Public\Documents\Extron\Driver2`

RS-232 drivers must be loaded or selected before you can choose RS-232 commands to program the buttons. (See the MLC 52 configuration program help file for more information.)

Downloading IR drivers from the DVD

The software DVD provided with the MLC 52 contains a set of device drivers that are also available from the web. To load the drivers from the DVD to your computer:

1. Load the Extron Software Products DVD into your CD or DVD drive. The disc should start automatically. If it does not, open your Windows Explorer and double-click **Launch.exe** on the CD or DVD drive to start it.
2. On the opening screen, click the **Drivers** button or select the **Drivers** tab at the top of the screen.
3. On the Drivers screen, select **MLC 52/DVCM 50 Device Drivers**.

Extron Electronics
Extron Software Products
Disc A: Issue 2007.1
800.633.9876
Products
Software
Drivers
Firmware
Manuals
Home
extron.com
Contact Us
Drivers
Extron drivers enable various Extron products to effectively communicate with a specific device and are created using device-specific IR or RS-232 commands."
IP Link® Device Drivers
MediaLink™ MLC 104 IP, MLC 104 IP Plus & MLC 226 IP Device Drivers
MLC 52 / DVCM 50 Device Drivers
System 5 IP Device Drivers
System 7SC Device Drivers
MediaLink™ MLC 206 Device Drivers

Figure 49. Selecting the MLC 52/DVCM 50 IR Driver Package

The IR device drivers package list screen is displayed.

4. From the DVD, you can download either the current Extron driver package (containing all IR drivers that were available at the time the package was compiled) or one driver at a time.

   To download the driver package:

   a. Click **`Install driver package Version n`**.

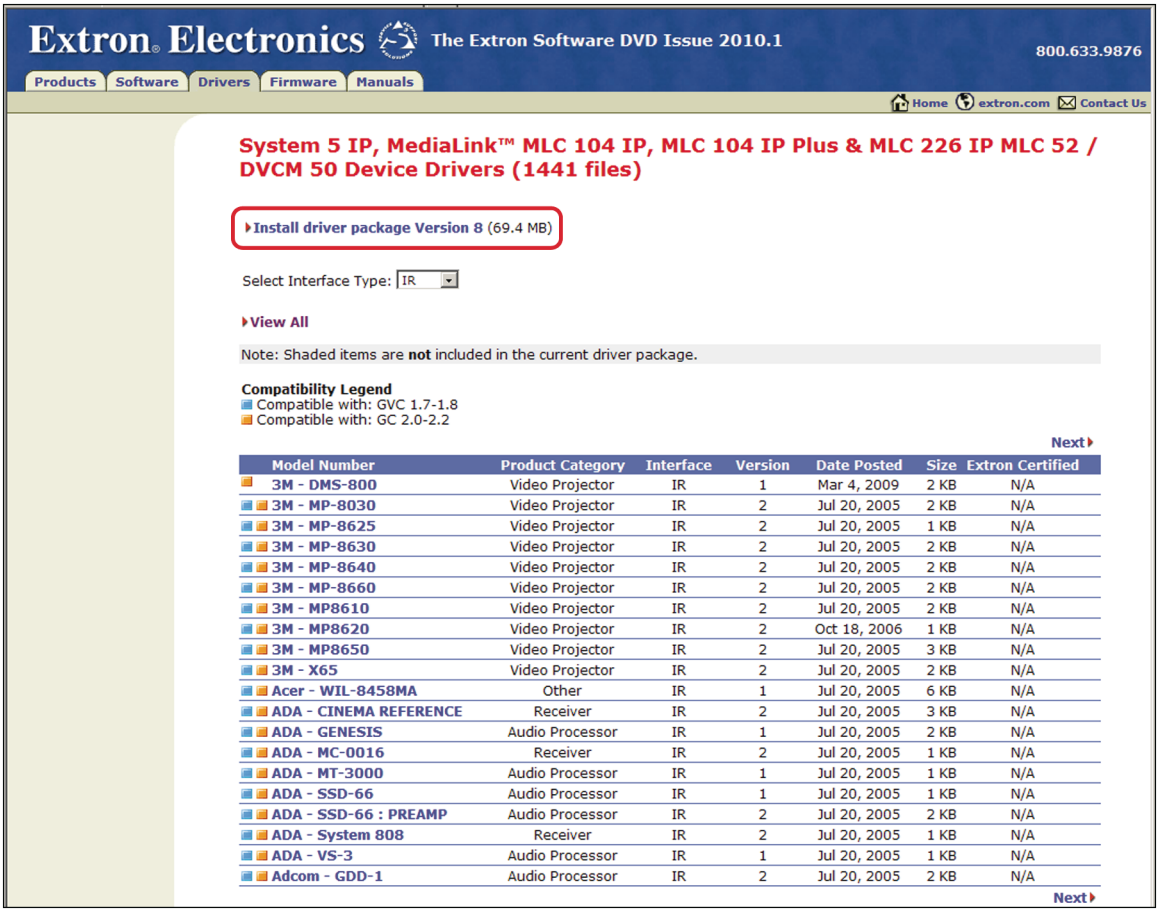
Extron Electronics
The Extron Software DVD Issue 2010.1
800.633.9876
Products
Software
Drivers
Firmware
Manuals
Home
extron.com
Contact Us
System 5 IP, MediaLink™ MLC 104 IP, MLC 104 IP Plus & MLC 226 IP MLC 52 / DVCM 50 Device Drivers (1441 files)
Install driver package Version 8 (69.4 MB)
Select Interface Type: IR
View All
Note: Shaded items are not included in the current driver package.
Compatibility Legend
Compatible with: GVC 1.7-1.8
Compatible with: GC 2.0-2.2
Next
Model Number | Product Category | Interface | Version | Date Posted | Size | Extron Certified
3M - DMS-800 | Video Projector | IR | 1 | Mar 4, 2009 | 2 KB | N/A
3M - MP-8030 | Video Projector | IR | 2 | Jul 20, 2005 | 2 KB | N/A
3M - MP-8625 | Video Projector | IR | 2 | Jul 20, 2005 | 1 KB | N/A
3M - MP-8630 | Video Projector | IR | 2 | Jul 20, 2005 | 2 KB | N/A
3M - MP-8640 | Video Projector | IR | 2 | Jul 20, 2005 | 2 KB | N/A
3M - MP-8660 | Video Projector | IR | 2 | Jul 20, 2005 | 2 KB | N/A
3M - MP8610 | Video Projector | IR | 2 | Jul 20, 2005 | 2 KB | N/A
3M - MP8620 | Video Projector | IR | 2 | Oct 18, 2006 | 1 KB | N/A
3M - MP8650 | Video Projector | IR | 2 | Jul 20, 2005 | 3 KB | N/A
3M - X65 | Video Projector | IR | 2 | Jul 20, 2005 | 2 KB | N/A
Acer - WIL-8458MA | Other | IR | 1 | Jul 20, 2005 | 6 KB | N/A
ADA - CINEMA REFERENCE | Receiver | IR | 2 | Jul 20, 2005 | 3 KB | N/A
ADA - GENESIS | Audio Processor | IR | 1 | Jul 20, 2005 | 2 KB | N/A
ADA - MC-0016 | Receiver | IR | 2 | Jul 20, 2005 | 1 KB | N/A
ADA - MT-3000 | Audio Processor | IR | 1 | Jul 20, 2005 | 1 KB | N/A
ADA - SSD-66 | Audio Processor | IR | 1 | Jul 20, 2005 | 1 KB | N/A
ADA - SSD-66 : PREAMP | Audio Processor | IR | 2 | Jul 20, 2005 | 2 KB | N/A
ADA - System 808 | Receiver | IR | 2 | Jul 20, 2005 | 1 KB | N/A
ADA - VS-3 | Audio Processor | IR | 1 | Jul 20, 2005 | 1 KB | N/A
Adcom - GDD-1 | Audio Processor | IR | 2 | Jul 20, 2005 | 2 KB | N/A
Next

Figure 50. IR Device Drivers Package List

   b. Click **Run** on the File Download - Security Warning screen.

   c. Click **Run** on the Internet Explorer - Security Warning screen.

   d. Follow instructions on the Driver Install wizard screens to complete installation of the driver package. The drivers are all placed in the Driver2 folder.

NOTE: By default,the drivers that you download are stored in the Driver2 folder on your computer, located at:

- **Windows XP** — `C:\Documents and Settings\All Users\Shared Documents\Extron\ Driver2`
- **Windows 7 and Vista** — `C:\Users\Public\Documents\Extron\Driver2`

To download a single driver:

a. (Optional) From the Select Interface Type drop-down menu, select **IR** for the type of drivers to view. When you make this selection, only drivers in the current driver package are displayed.

b. If you want to view all the IR drivers, including those outside the current package, click **View All.**

c. To view additional pages of driver listings, click **Next**. Click **Previous** to page backward through the drivers list.

d. Right-click on the name of the desired driver. From the pop-up menu, select **Save Target As...** .

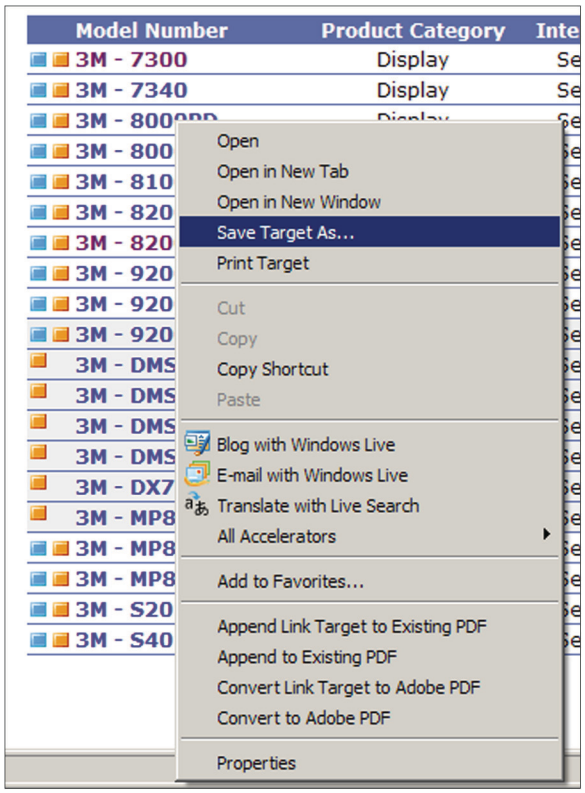

Figure 51. Saving a Single Driver to the Computer

e. On the Save window that opens, save the driver file in the Driver2 folder as follows:

- **Windows XP** — `c:\Documents and Settings\All Users\Shared Documents\Extron\ Driver2`
- **Windows 7 and Vista** — `c:\Users\Public\Documents\Extron\ Driver2`

Downloading drivers from the web

Drivers can also be obtained directly from the Extron web site, as follows:

1. Visit the Extron web site at **www.extron.com**, and click the **Download** tab.
2. Click the **Device Drivers** button (shown at right) on the Download Center screen.

3. From the drop-down menu on the Device Drivers screen, select **MLC 52 IR**.

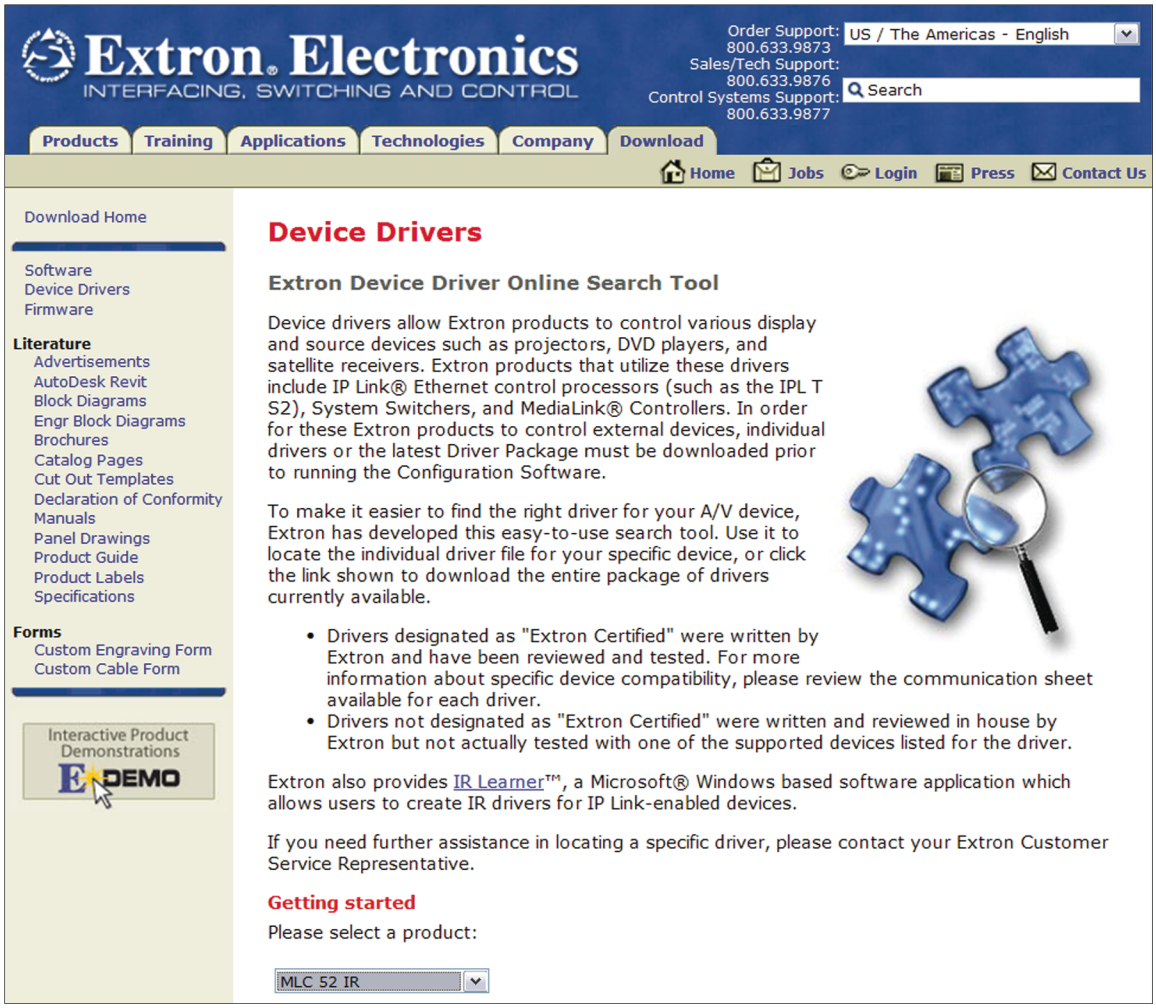
Extron Electronics
INTERFACING, SWITCHING AND CONTROL
Order Support: 800.633.9873
Sales/Tech Support: 800.633.9876
Control Systems Support: 800.633.9877
US / The Americas - English
Search
Products
Training
Applications
Technologies
Company
Download
Home
Jobs
Login
Press
Contact Us
Download Home
Software
Device Drivers
Firmware
Literature
Advertisements
AutoDesk Revit
Block Diagrams
Engr Block Diagrams
Brochures
Catalog Pages
Cut Out Templates
Declaration of Conformity
Manuals
Panel Drawings
Product Guide
Product Labels
Specifications
Forms
Custom Engraving Form
Custom Cable Form
Interactive Product Demonstrations
EDEMO
Device Drivers
Extron Device Driver Online Search Tool
Device drivers allow Extron products to control various display and source devices such as projectors, DVD players, and satellite receivers. Extron products that utilize these drivers include IP Link® Ethernet control processors (such as the IPL T S2), System Switchers, and MediaLink® Controllers. In order for these Extron products to control external devices, individual drivers or the latest Driver Package must be downloaded prior to running the Configuration Software.
To make it easier to find the right driver for your A/V device, Extron has developed this easy-to-use search tool. Use it to locate the individual driver file for your specific device, or click the link shown to download the entire package of drivers currently available.
Drivers designated as "Extron Certified" were written by Extron and have been reviewed and tested. For more information about specific device compatibility, please review the communication sheet available for each driver.
Drivers not designated as "Extron Certified" were written and reviewed in house by Extron but not actually tested with one of the supported devices listed for the driver.
Extron also provides IR Learner™, a Microsoft® Windows based software application which allows users to create IR drivers for IP Link-enabled devices.
If you need further assistance in locating a specific driver, please contact your Extron Customer Service Representative.
Getting started
Please select a product:
MLC 52 IR

Figure 52. Device DriversScreen

4. From the menus on the Extron Device Drivers Online Search Tool screen, select search criteria for the drivers you want to download. You can select the Extron Product on which the drivers will be used (**`MLC 52 IR`** or **`MLC 52 RS`** is already selected), the Protocol Type (**`IR`**, **`Serial`**, or **`All`**), Manufacturer (device manufacturer name or **`All`**), Product Category (type of device or **`All`**), and Model (model name or **`All`**).

   As you make each selection, the driver list below changes to display all available drivers meeting your selected criteria.

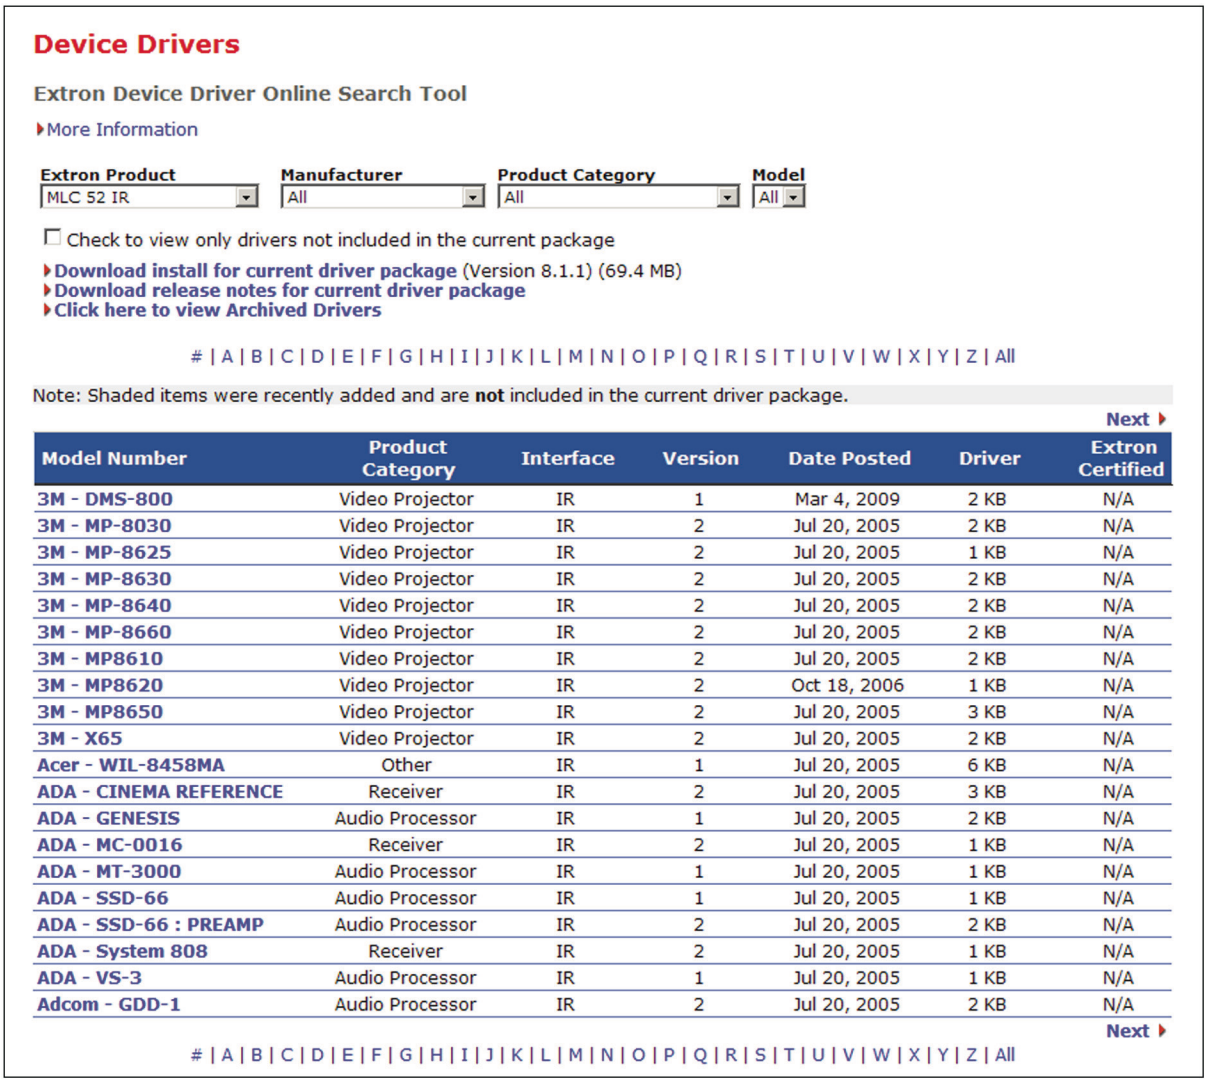

Device Drivers

Extron Device Driver Online Search Tool

More Information

Extron Product	Manufacturer	Product Category	Model
MLC 52 IR	All	All	All

☐ Check to view only drivers not included in the current package

Download install for current driver package (Version 8.1.1) (69.4 MB)
Download release notes for current driver package
Click here to view Archived Drivers

| A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | Z | All

Note: Shaded items were recently added and are **not** included in the current driver package.

Next

Model Number	Product Category	Interface	Version	Date Posted	Driver	Extron Certified
3M - DMS-800	Video Projector	IR	1	Mar 4, 2009	2 KB	N/A
3M - MP-8030	Video Projector	IR	2	Jul 20, 2005	2 KB	N/A
3M - MP-8625	Video Projector	IR	2	Jul 20, 2005	1 KB	N/A
3M - MP-8630	Video Projector	IR	2	Jul 20, 2005	2 KB	N/A
3M - MP-8640	Video Projector	IR	2	Jul 20, 2005	2 KB	N/A
3M - MP-8660	Video Projector	IR	2	Jul 20, 2005	2 KB	N/A
3M - MP8610	Video Projector	IR	2	Jul 20, 2005	2 KB	N/A
3M - MP8620	Video Projector	IR	2	Oct 18, 2006	1 KB	N/A
3M - MP8650	Video Projector	IR	2	Jul 20, 2005	3 KB	N/A
3M - X65	Video Projector	IR	2	Jul 20, 2005	2 KB	N/A
Acer - WIL-8458MA	Other	IR	1	Jul 20, 2005	6 KB	N/A
ADA - CINEMA REFERENCE	Receiver	IR	2	Jul 20, 2005	3 KB	N/A
ADA - GENESIS	Audio Processor	IR	1	Jul 20, 2005	2 KB	N/A
ADA - MC-0016	Receiver	IR	2	Jul 20, 2005	1 KB	N/A
ADA - MT-3000	Audio Processor	IR	1	Jul 20, 2005	1 KB	N/A
ADA - SSD-66	Audio Processor	IR	1	Jul 20, 2005	1 KB	N/A
ADA - SSD-66 : PREAMP	Audio Processor	IR	2	Jul 20, 2005	2 KB	N/A
ADA - System 808	Receiver	IR	2	Jul 20, 2005	1 KB	N/A
ADA - VS-3	Audio Processor	IR	1	Jul 20, 2005	1 KB	N/A
Adcom - GDD-1	Audio Processor	IR	2	Jul 20, 2005	2 KB	N/A

Next

| A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | Z | All

Figure 53. Entering MLC 62 Driver Search Criteria

5. Click on the device name whose driver you want to download.

   To download all the drivers in the current package, click the **`Download install for current driver package (Version n)`** link.

6. On the Download Center screen, enter the requested information, and click the **`Download driver name`** button.

7. Follow the directions on the download screens that follow. Unless you specify otherwise, the driver file is placed at one of the following locations on your computer:

   - **Windows XP** — `C:\Documents and Settings\All Users\Shared Documents\Extron\Driver2`
   - **Windows 7 and Vista** — `C:\Users\Public\Documents\Extron\Driver2`

Using SIS Commands

Simple Instruction Set (SIS) commands can be entered on your computer, using a utility such as Extron DataViewer or HyperTerminal, to find out more information about the MLC 52.

Host-to-Controller Communications

SIS commands consist of strings of one or more characters per field. No special characters are required to begin or end a command sequence. When the MLC determines that a command is valid, it executes the command and sends a response to the host device.

Most responses from the MLC 52 to the host end with a carriage return and a line feed (CR/LF = ↵), which signals the end of the response character string.

Controller-initiated messages

When a local event such as a front panel button press takes place, the MLC 52 responds by sending a message to the host, indicating what selection was entered. No response is required from the host.

The MLC sends the following copyright message only when it first powers on.

(c) Copyright 2005, Extron Electronics, MLC 52, V*x.xx*, 60-100*n-nn*

where V*x.xx* is the firmware version number and *n* is the MLC 52 model number.

Error Responses

If the MLC 52 is unable to execute a command it receives because the command is invalid or contains invalid parameters, the controller returns an error response to the host. This response consists of the letter "E" followed by a number and a carriage return with a line feed. The following error response codes can be returned:

E10 – Invalid command or parameter

E14 – Not valid for this configuration

Using the Command/Response Table

The command/response table on the following pages lists valid ASCII command codes, the responses of the MLC to the host, and a description of the command function or the results of executing the command. The ASCII to Hex Conversion Table below is for use with the command/response table.

ASCII to Hex Conversion Table

Space →	20	!	21	"	22	#	23	$	24	%	25	&	26	'	27	Esc	1B
(	28	)	29	*	2A	+	2B	,	2C	-	2D	.	2E	/	2F	CR	0D
0	30	1	31	2	32	3	33	4	34	5	35	6	36	7	37	LF	0A
8	38	9	39	:	3A	;	3B	<	3C	=	3D	>	3E	?	3F		
@	40	A	41	B	42	C	43	D	44	E	45	F	46	G	47		
H	48	I	49	J	4A	K	4B	L	4C	M	4D	N	4E	O	4F		
P	50	Q	51	R	52	S	53	T	54	U	55	V	56	W	57		
X	58	Y	59	Z	5A	[	5B	\	5C	]	5D	^	5E	_	5F		
`	60	a	61	b	62	c	63	d	64	e	65	f	66	g	67		
h	68	i	69	j	6A	k	6B	l	6C	m	6D	n	6E	o	6F		
p	70	q	71	r	72	s	73	t	74	u	75	v	76	w	77		
x	78	y	79	z	7A	{	7B	|	7C	}	7D	~	7E	DEL	7F		

Symbol Definitions

↵ = CR/LF (carriage return/line feed) (hex 0D 0A)

← = Soft carriage return (no line feed) (hex 0D; web |)

• = Space

Esc = Escape key (hex 1B; web W)

X1 = Firmware version number (*n.nn* format)

X2 = Display power status (0 through 3)
0 = power off
1 = power on
2 = cooling down
3 = warming up

X3 = On or Off status
0 = Off or disabled
1 = on or enabled

?? = Memory block number in hexadecimal, where ?? can be 0 through 7F (0 through 127 decimal)

NOTE: Unless otherwise indicated, commands are **not** case-sensitive.

Command/response Table for SIS Commands

Command	ASCII Command (Host to unit)	Response (Unit to host)	Additional description
Firmware version, part number, and information requests			
Query firmware version	Q	X1↵	Display firmware version X1 to two decimal places (n.nn).
Example	Q	1.00↵	
View controller part number	N	60-74*n*-*nn*↵	Show the MLC 52 part number: MLC 52 IR = 60-744-02 MLC 52 RS = 60-744-12 MLC 52 IR VC = 60-745-02 MLC 52 RS VC = 60-745-12 MLC 52 RS MK = 60-744-23 MLC 52 RS EU = 60-744-34 MLC 52 RS MK VC = 60-745-23 MLC 52 RS EU VC = 60-745-34
Query model name	I	MLC•52•IR↵ **or** MLC•52•RS↵ **or** MLC•52•IR•VC↵ **or** MLC•52•RS•VC↵ **or** MLC•52•RS•EU↵ **or** MLC•52•RS•MK↵ **or** MLC•52•RS•EU•VC↵ **or** MLC•52•RS•MK•VC↵	Show the name of the MLC 52 model.
Display power status			
Turn display power on	1P	Pwr1↵	
Turn display power off	0P	Pwr0↵	
View display power status	P	PwrX2↵	For X2: 0 = on 1 = off 2 = cooling down 3 = warming up
Example:	P	Pwr2↵	The projector or display is cooling down.
Front panel lockout (executive mode)			
Off	0X	Exe0↵	Unlock front panel buttons.
On	1X	Exe1↵	Lock all front panel buttons.
View	X	X11↵	View front panel lockout status. X11. For X11, 0 = off; 1 = on.
Reset			
Reset switches to factory default	Esc ZXXX ←	ZapX↵	Reset all MLC 52 buttons and switches to the factory default and erase any codes added by the user.

Reference Information

This section contains the specifications for all models of the MLC 52 and lists names and part numbers of included parts and optional accessories for the product. It also contains instructions for mounting an electrical junction box and templates for measuring and cutting the hole in the mounting surface (US models only).

Topics that are covered include:

- **Specifications — MLC 52 Series**
- **Part Numbers and Accessories**
- **Mounting an Electrical Box**
- **Templates for the MLC 52 and MLC 52 VC (US Models)**

Specifications — MLC 52 Series

Control — host ports

Serial control port	1 bidirectional RS-232 front panel 2.5 mm mini stereo jack
Baud rate and protocol	9600 baud, 8 data bits, 1 stop bit, no parity
Serial control pin configurations	Mini stereo jack: tip = TX, ring = RX, sleeve = GND
Program control	Extron configuration program for Windows® Extron Simple Instruction Set (SIS™)
IR learning frequencies	30 kHz to 62 kHz
IR learning distance	4" (10 cm) to 14" (36 cm) from the side panel

Control — serial port (RS models only)

Display control port	(1) 3.5 mm captive screw connector, 6 pole for unidirectional RS-232 control (±5 V) (connector is shared with IR control port and power input)
Baud rate and protocol (RS-232)	57600 to 1200 baud (9600 default); 8 (default) or 7 data bits; 1 stop bit; no parity (default), or even or odd parity

Control — IR port

IR control port	(1) 3.5 mm captive screw connector, 6 pole for IR (connector is shared with serial control and power input); TTL level (0 to 5 V) modulated infrared control from 30 kHz up to 60 kHz

Control — remote volume (VC models only)

Volume control port	(1) 3.5 mm direct insertion captive screw connector, 3 pole
Pin configuration	1 = +10 VDC, 50 mA (max); 2 = volume (variable voltage); 3 = GND
Volume control voltage range	0 V (mute) to 10 V (maximum volume)

General

External power supply	100 VAC to 240 VAC, 50-60 Hz, external; to 12 VDC, 2 A, regulated
Power input requirements	12 VDC, 0.15 A
Cooling	Convection, no vents
Temperature/humidity	Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing

Mounting

Rack mount

Models other than MK and EU models

Yes, with optional rack mounting kit

Furniture mount

Models other than MK and EU models

Yes, with optional lectern mounting kit

Wall mount

MLC 52 RS MK, MLC 52 RS VC MK

Mounts to a standard 47 mm deep MK electric type British standard wall box

MLC 52 RS EU, MLC 52 RS VC EU

Mountable into standard 50 mm deep European junction boxes

Enclosure type

MK and EU models ..... Metal

All other models ..... High-impact plastic

Enclosure dimensions

MLC 52 RS, MLC 52 IR

Faceplate ..... 4.5" H x 2.8" W x 0.1" D
(11.4 cm H x 7.1 cm W x 0.3 cm D) (1 gang)

Device..... 2.7" H x 1.7" W x 1.4" D
(6.8 cm H x 4.3 cm W x 3.5 cm D)
(Overall rear dimensions, including connectors. Allow at least 1.85" [4.7 cm] depth in the wall or furniture for device and cable clearance.)

MLC 52 RS VC, MLC 52 IR VC

Faceplate ..... 4.5" H x 4.6" W x 0.1" D
(11.4 cm H x 11.7 cm W x 0.3 cm D) (2 gang)

Device..... 2.7" H x 3.3" W x 1.4" D
(6.8 cm H x 8.4 cm W x 3.5 cm D)
(Overall rear dimensions, including connectors. Allow at least 1.85" [4.7 cm] depth in the wall or furniture for device and cable clearance.)

MLC 52 RS MK

Faceplate ..... 3.4" H x 3.4" W x 0.1" D
8.5 cm H x 8.5 cm W x 0.3 cm D
(1-gang MK electric type British Standard wall box frame size)

Device..... 2.7" H x 1.7" W x 1.4" D
(6.8 cm H x 4.3 cm W x 3.5 cm D)
(Overall rear dimensions, including connectors. Allow at least 1.85" [4.7 cm] depth in the wall or furniture for device and cable clearance.)

MLC 52 RS VC MK

Faceplate ..... 3.4" H x 5.7" W x 0.1" D
8.5 cm H x 14.6 cm W x 0.3 cm D
(2-gang MK electric type British Standard wall box frame size)

Device..... 2.7" H x 3.3" W x 1.4" D
(6.8 cm H x 8.4 cm W x 3.5 cm D)
(Overall rear dimensions, including connectors. Allow at least 1.85" [4.7 cm] depth in the junction box for device and cable clearance.)

MLC 52 RS EU

Faceplate ..... 3.2" H x 6.0" W x 0.1" D (2-gang EU)
(8.1 cm H x 15.2 cm W x 0.3 cm D)

Device..... 1.7" H x 2.7" W x 1.4" D
(4.3 cm H x 6.8 cm W x 3.5 cm D)
(Overall rear dimensions, including connectors. Allow at least 1.85" [4.7 cm] depth in the junction box for device and cable clearance.)

MLC 52 RS VC EU

Faceplate ..... 3.2" H x 6.0" W x 0.1" D (2-gang EU)
(8.1 cm H x 15.2 cm W x 0.3 cm D)

Device..... 1.7" H x 4.5" W x 1.4" D
(6.8 cm H x 11.4 cm W x 3.5 cm D)
(Overall rear dimensions, including connectors. Allow at least 1.85" [4.7 cm] depth in the junction box for device and cable clearance.)

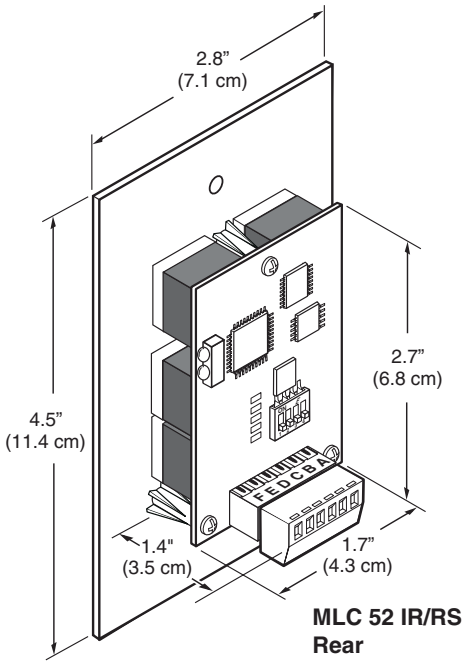

MLC 52 IR/RS
Rear

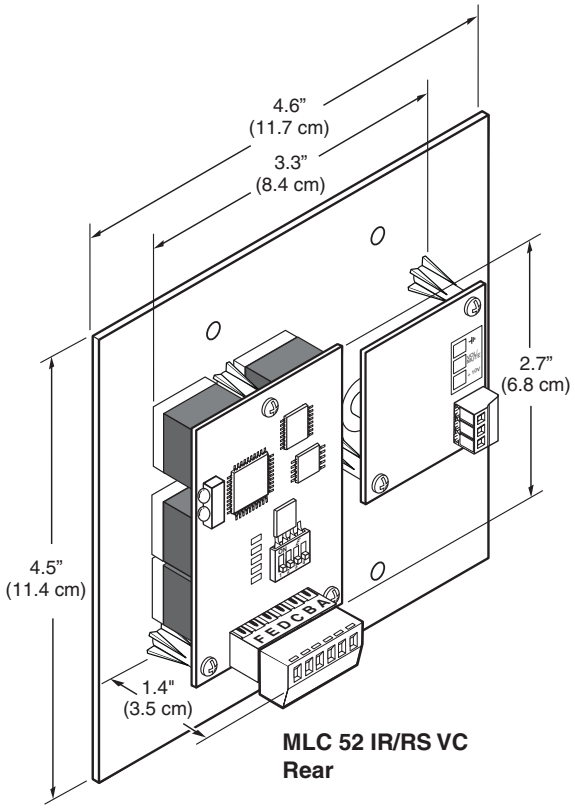

MLC 52 IR/RS VC
Rear

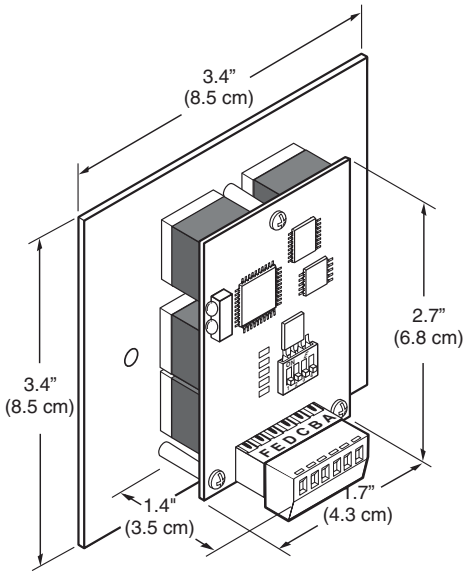

MLC 52 RS MK
Rear

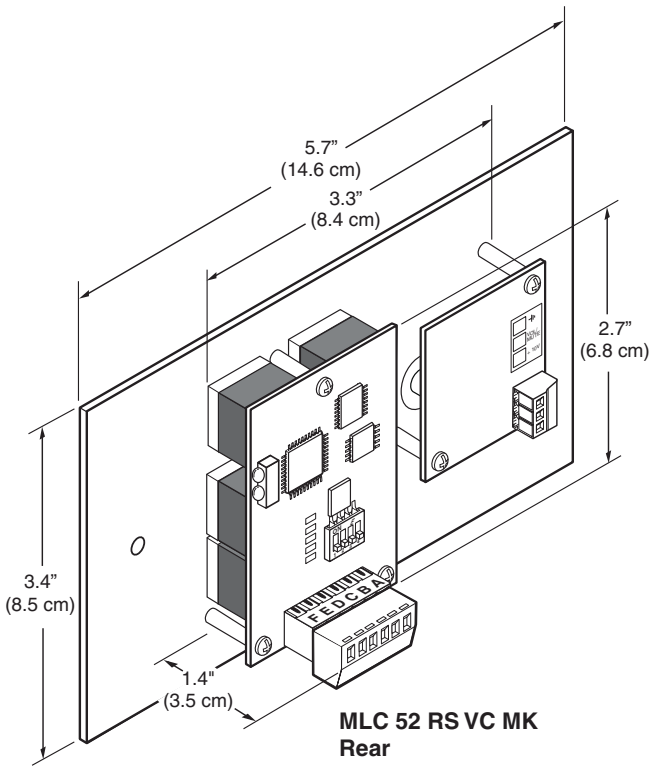

MLC 52 RS VC MK
Rear

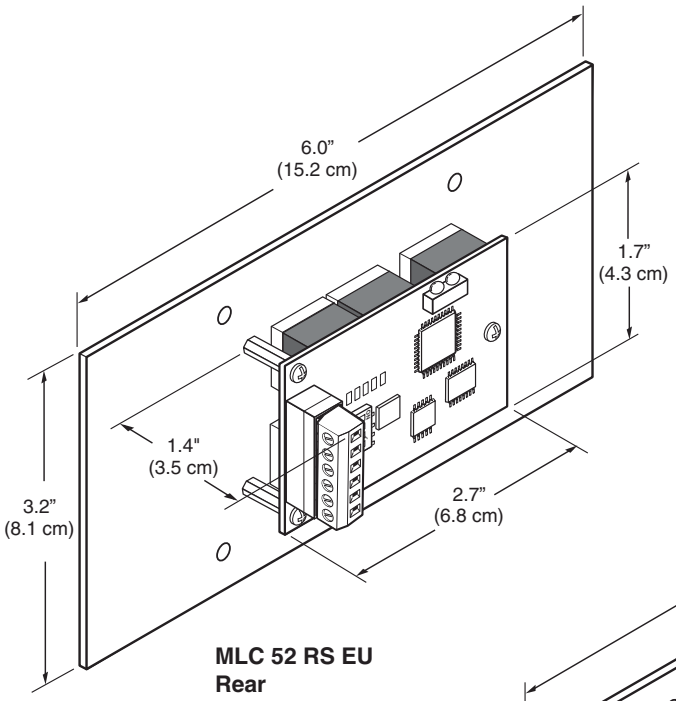

MLC 52 RS EU
Rear

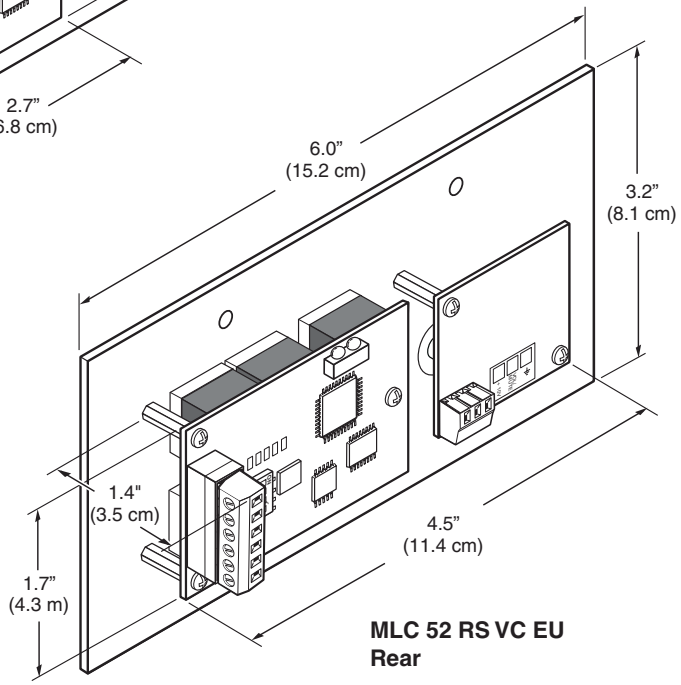

MLC 52 RS VC EU
Rear

Product weight

MLC 52 RS, MLC 52 IR, MLC 52 RS MK	0.2 lb (0.1 kg)
VC and EU models	0.3 lb (0.1 kg)
Shipping weight	3 lbs (2 kg)
Vibration	ISTA 1A in carton (International Safe Transit Association)

Regulatory compliance

Safety	CE, c-UL, UL
EMI/EMC	CE, C-tick, FCC Class A, ICES, Section 508 of the Rehabilitation Act (29 U.S.C. 794d), VCCI Class A
MTBF	30,000 hours
Warranty	3 years parts and labor

NOTES: All nominal levels are at ±10%.

Specifications are subject to change without notice.

Part Numbers and Accessories

Included Parts

These items are included with the MLC 52 Series controller:

Included Parts	Replacement Part Number
MLC 52 IR	60-744-02
MLC 52 RS	60-744-12
MLC 52 IR VC	60-745-02
MLC 52 RS VC	60-745-12
MLC 52 RS MK	60-744-23
MLC 52 RS EU	60-744-34
MLC 52 RS VC MK	60-745-23
MLC 52 RS VC EU	60-745-34
Button Labels — icon and text	33-1762-01
IR Emitter with cable	
PS 1210C 12 VDC, 1 A external power supply	70-775-01
ESD grounding card and cable kit	
6-pin, 3.5 mm captive screw connector	
MR100 1-gang plastic mounting brackets (mud rings) (1 black, 1 white) (US only)	70-519-12, -13
MR200 2-gang plastic mounting brackets (mud rings) (1 black, 1 white) (US only)	70-519-22, 23
MLC 52 Series MediaLink Controllers Quick Start Guide	
Extron Software Products DVD	

Optional Accessories

These optional items can be ordered separately:

Mounting Hardware	Part Number
One-gang EWB external wall box (black, white)	60-452-02, -03
One-gang junction box, 2.5" (10 mm) deep	980130
One-gang SMB surface mount box (black only)	60-639-02
Two-gang EWB external wall box (black, white)	60-453-02, -03
Two-gang junction box, 2.5" (10.2 mm) deep	980084
Two-gang junction box, 3.5" (14.3) deep	980057
Two-gang SMB surface mount box (black only)	60-640-02

Faceplates	Part Number
MLM 52 1 GWP (black, white)	70-498-02
MLM 52 1 GWP, brushed aluminum	70-498-04
MLM 52 VC, metal (black, white)	70-527-02
MLM 52 VC, brushed aluminum	70-538-04
MLM 52 L VC, metal (black, white)	70-544-02, -03

Miscellaneous Accessories	Part Number
MLP 152 Stereo Power Amplifier	60-844-01
MPA 401 Mono 70/100 V Power Amplifier	60-845-01, -11
IR Link IR signal repeater (black, white)	60-404-02, -03
IRL 20	60-580-01
VC 50 Volume Control Wall Plate	70-530-02
IR 452 Remote Control	70-543-01
CFG Configuration cable	70-335-01

Recommended Cables

CTL and CTLP (Comm-link) Cable	Part Number
CTL/500 bulk 500'/150 m, non-plenum	22-148-02
CTL/1000 bulk 1000'/300 m, non-plenum	22-148-03
CTLP/1000 bulk 1000'/300 m, plenum	22-119-03

Mounting an Electrical Box

If you want to install the MLC 52 or MLC 52 VC (US models) in an electrical box (in a wall or in furniture), install the box as described below.

NOTE: These instructions are for US models only. To mount an electrical box for an EU or MK model, follow the directions provided with the box by its manufacturer.

1. See the appropriate template diagram in "**Templates for MLC 52 and MLC 52 VC (US Models)**," later in this section, to find out the dimensions of the opening required for the size of the wall box that you are using. If you are using a mud ring with the wall box, see the templates provided with the bracket.
2. Using a ruler or tape measure and a soft pencil, draw guidelines on the installation surface (wall or furniture) in the desired orientation and location where the opening for the bracket or wall box will be cut.

   CAUTION: The template diagrams in this guide are not to scale. Do not trace them or use them as patterns on the installation surface. Use these diagrams only for reference to obtain the dimensions of the hole that needs to be cut. Use a ruler to measure and draw the cutting guidelines.

3. Cut out the wall or furniture material inside the marked area.
4. Check the opening size by inserting the wall box or mounting bracket into the opening. The equipment should fit easily into the opening. Enlarge or smooth the edges of the opening if needed.
5. Feed cables through the electrical box punch-out holes, and secure them with cable clamps to provide strain relief.
6. Exposed cable shields (braided or foil) are potential sources of short circuits. Trim back or insulate shields with heat shrink.

   WARNING: To prevent short circuits, cut back the outer foil shield to the point where the cable exits the cable clamp. Both braided and foil shields should be connected to an equipment ground at the other end of the cable.

7. Insert the electrical box into the opening, and attach it to the wall stud or furniture with nails or screws, leaving the front edge flush with the outer wall or furniture surface. The following illustration applies to all sizes of electrical boxes.

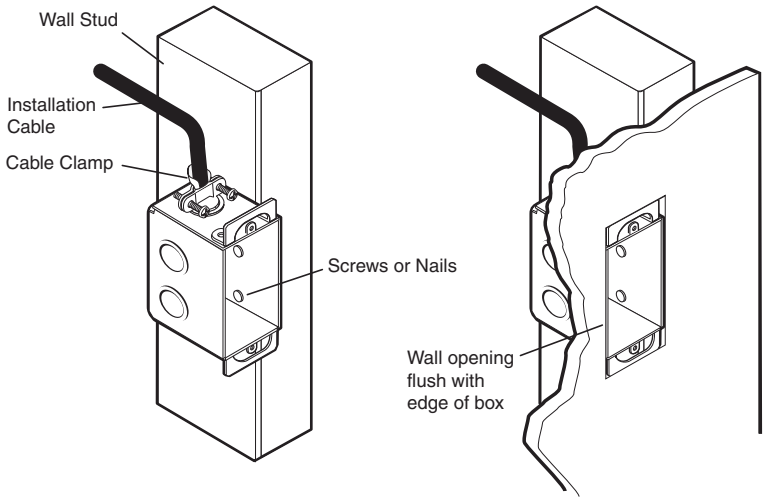

Figure 54. Attaching an Electrical Box to a Wall Stud

- If you are attaching the wall box to wood, use four #8 or #10 screws or 10-penny nails. A minimum of ½ inch (1.3 cm) of screw threads must penetrate the wood.
- If you are attaching the wall box to metal studs or furniture, use four #8 or #10 self-tapping sheet metal screws or machine bolts with matching nuts.
- If you are using a mounting bracket (mud ring) with the electrical box, follow the directions included with the bracket to attach the clips that fasten the bracket to the wall or furniture.

8. If desired, replace the faceplate or button labels on the MLC. (See "**Replacing the Faceplate (US Models Only)**" or "**Replacing Button Labels**" in the "Installation and Configuration" section.)
9. Cable and test the MLC before fastening it into the wall box, mounting bracket, or furniture.

Templates for MLC 52 and MLC 52 VC (US Models)

Use these rough-in templates as guides to measure and mark the hole in the wall or furniture through which the MLC 52 will be mounted. The templates provide measurements for installing the controller with either an electrical box or a mounting bracket. (You do not need the templates if you are mounting the panel using an external mounting option.)

NOTE: These templates are for US models only.

The MLC controller requires a depth of at least 1.25 inches (3.2 cm) inside the wall or furniture.

CAUTIONS: These templates are **not** to scale and are provided for reference only.

If you use a wall box or mud ring, connect it to an earth ground. If you do not use a grounded wall box or mud ring, ground the faceplate to an earth ground, or tie it to the circuit ground via a ground pin on the circuit board.

MLC 52 IR and MLC 52 RS Template (One-gang Size)

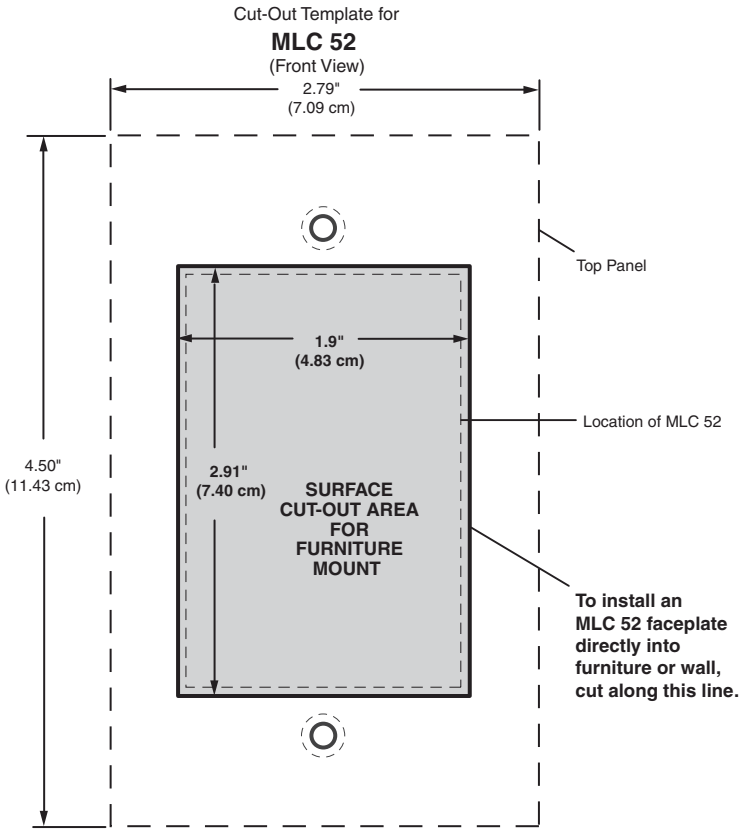

Figure 55. MLC 52 IR and MLC 52 RS Cutout Template

MLC 52 IR VC and MLC 52 RS VC Template (Two-gang Size)

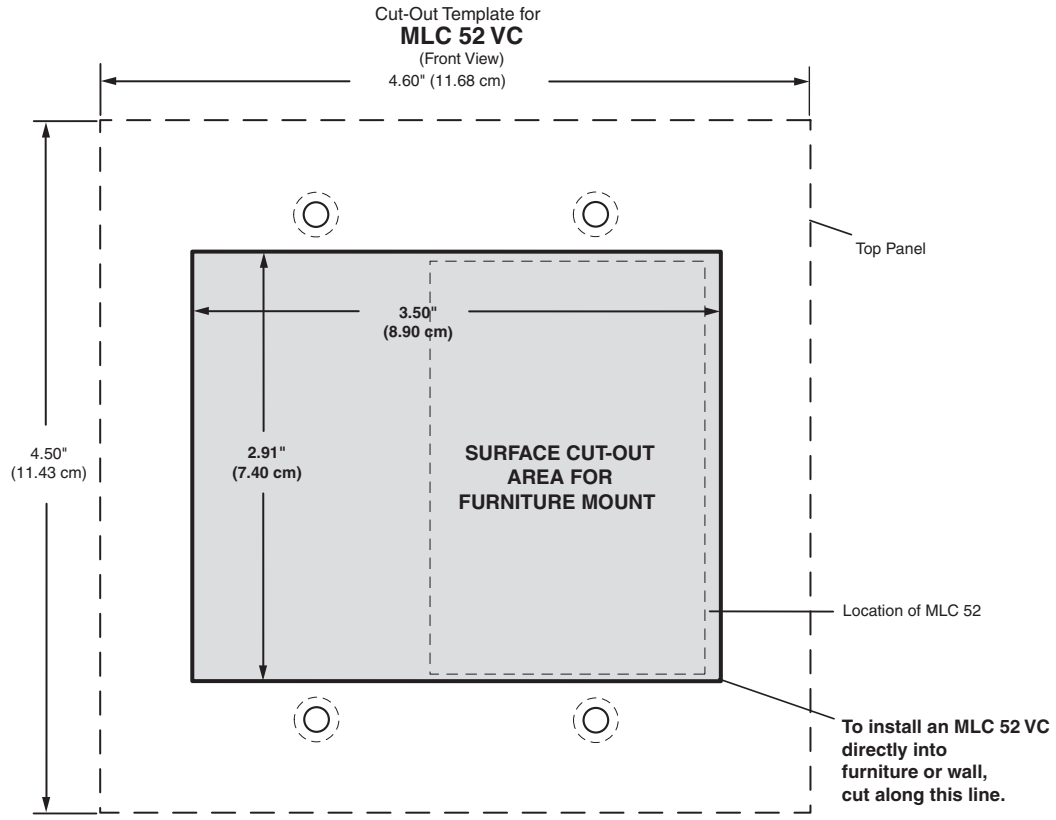

Figure 56. MLC 52 IR VC and MLC 52 RS VC Cutout Template

Extron® Warranty

Extron Electronics warrants this product against defects in materials and workmanship for a period of three years from the date of purchase. In the event of malfunction during the warranty period attributable directly to faulty workmanship and/or materials, Extron Electronics will, at its option, repair or replace said products or components, to whatever extent it shall deem necessary to restore said product to proper operating condition, provided that it is returned within the warranty period, with proof of purchase and description of malfunction to:

USA, Canada, South America, and Central America:
Extron Electronics
1001 East Ball Road
Anaheim, CA 92805
U.S.A.

Japan:
Extron Electronics, Japan
Kyodo Building, 16 Ichibancho
Chiyoda-ku, Tokyo 102-0082
Japan

Europe, Africa, and the Middle East:
Extron Europe
Hanzeboulevard 10
3825 PH Amersfoort
The Netherlands

China:
Extron China
686 Ronghua Road
Songjiang District
Shanghai 201611
China

Asia:
Extron Asia
135 Joo Seng Road, #04-01
PM Industrial Bldg.
Singapore 368363
Singapore

Middle East:
Extron Middle East
Dubai Airport Free Zone
F12, PO Box 293666
United Arab Emirates, Dubai

This Limited Warranty does not apply if the fault has been caused by misuse, improper handling care, electrical or mechanical abuse, abnormal operating conditions, or modifications were made to the product that were not authorized by Extron.

NOTE: If a product is defective, please call Extron and ask for an Application Engineer to receive an RA (Return Authorization) number. This will begin the repair process.

USA: (714) 491-1500 **Europe**: +31.33.453.4040
Asia: +65.6383.4400 **Japan**: +81.3.3511.7655

Units must be returned insured, with shipping charges prepaid. If not insured, you assume the risk of loss or damage during shipment. Returned units must include the serial number and a description of the problem, as well as the name of the person to contact in case there are any questions.

Extron Electronics makes no further warranties either expressed or implied with respect to the product and its quality, performance, merchantability, or fitness for any particular use. In no event will Extron Electronics be liable for direct, indirect, or consequential damages resulting from any defect in this product even if Extron Electronics has been advised of such damage.

Please note that laws vary from state to state and country to country, and that some provisions of this warranty may not apply to you.

Extron **USA - West** Headquarters	Extron **USA - East**	Extron **Europe**	Extron **Asia**	Extron **Japan**	Extron **China**	Extron **Middle East**
+**800.633.9876** Inside USA/Canada Only	**+800.633.9876** Inside USA/Canada Only	**+800.3987.6673** Inside Europe Only	**+800.7339.8766** Inside Asia Only	**+81.3.3511.7655**	**+400.883.1568** Inside China Only	**+971.4.2991800**
+1.714.491.1500 **+1.714.491.1517** FAX	**+1.919.863.1794** **+1.919.863.1797** FAX	**+31.33.453.4040** **+31.33.453.4050** FAX	**+65.6383.4400** **+65.6383.4664** FAX	**+81.3.3511.7656** FAX	**+86.21.3760.1568** **+86.21.3760.1566** FAX	**+971.4.2991880** FAX

© 2010 Extron Electronics. All Rights Reserved. **www.extron.com**